



**TRILOBITE  
TESTING, INC**

# DRILL STEM TEST REPORT

Brito Oil Co Inc  
1223 N Rock Rd  
Bldg 1 Ste 100  
Wichita KS 67206  
ATTN: Brad Rine

**17 6s 35w Thomas KS**  
**Carpenter Unit 1-17**  
Job Ticket: 64053      **DST#: 2**  
Test Start: 2017.02.02 @ 15:45:00


## GENERAL INFORMATION:

Formation: **Altamont B & C**  
Deviated: No Whipstock: ft (KB)  
Time Tool Opened: 18:25:30  
Time Test Ended: 22:50:00  
Interval: **4475.00 ft (KB) To 4514.00 ft (KB) (TVD)**  
Total Depth: 4514.00 ft (KB) (TVD)  
Hole Diameter: 7.88 inches Hole Condition: Fair  
Test Type: Conventional Bottom Hole (Reset)  
Tester: Jim Svaty  
Unit No: 76  
Reference Elevations: 3306.00 ft (KB)  
3301.00 ft (CF)  
KB to GR/CF: 5.00 ft

**Serial #: 8372      Outside**  
Press@RunDepth: 21.30 psig @ 4481.00 ft (KB)      Capacity: 8000.00 psig  
Start Date: 2017.02.02      End Date: 2017.02.02      Last Calib.: 2017.02.02  
Start Time: 15:45:01      End Time: 22:49:30      Time On Btm: 2017.02.02 @ 18:25:00  
Time Off Btm: 2017.02.02 @ 20:28:00

**TEST COMMENT:** 30-IFP- Surface Blow Building to 1 1/4in.  
30-ISIP- No Blow  
30-FFP- No Blow  
30-FSIP- No Blow

## PRESSURE SUMMARY

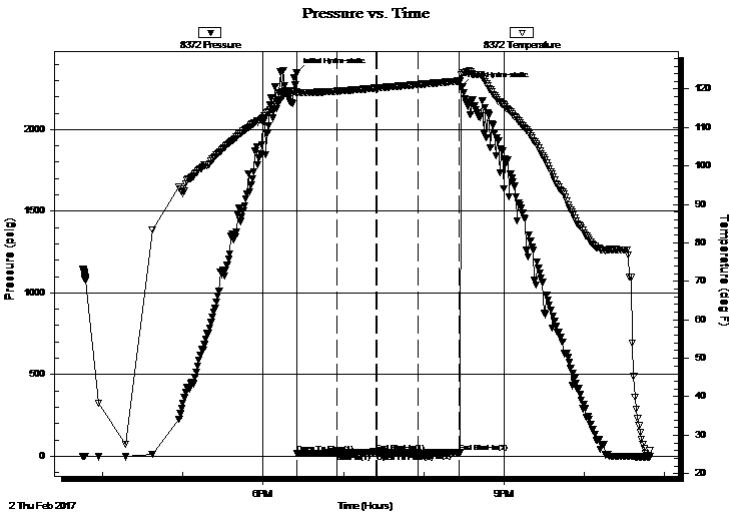

Time (Min.)	Pressure (psig)	Temp (deg F)	Annotation
0	2346.77	119.44	Initial Hydro-static
1	18.38	118.84	Open To Flow (1)
30	20.14	119.45	Shut-In(1)
60	27.13	120.25	End Shut-In(1)
60	18.62	120.26	Open To Flow (2)
91	21.30	121.18	Shut-In(2)
122	24.49	122.09	End Shut-In(2)
123	2262.43	123.80	Final Hydro-static

## Recovery

Length (ft)	Description	Volume (bbl)
2.00	Mud 100%	0.01

\* Recovery from multiple tests

## Gas Rates


Choke (inches)	Pressure (psig)	Gas Rate (Mcf/d)

Serial #: 8372

Outside Brito Oil Co Inc

Carpenter Unit 1-17

DST Test Number: 2

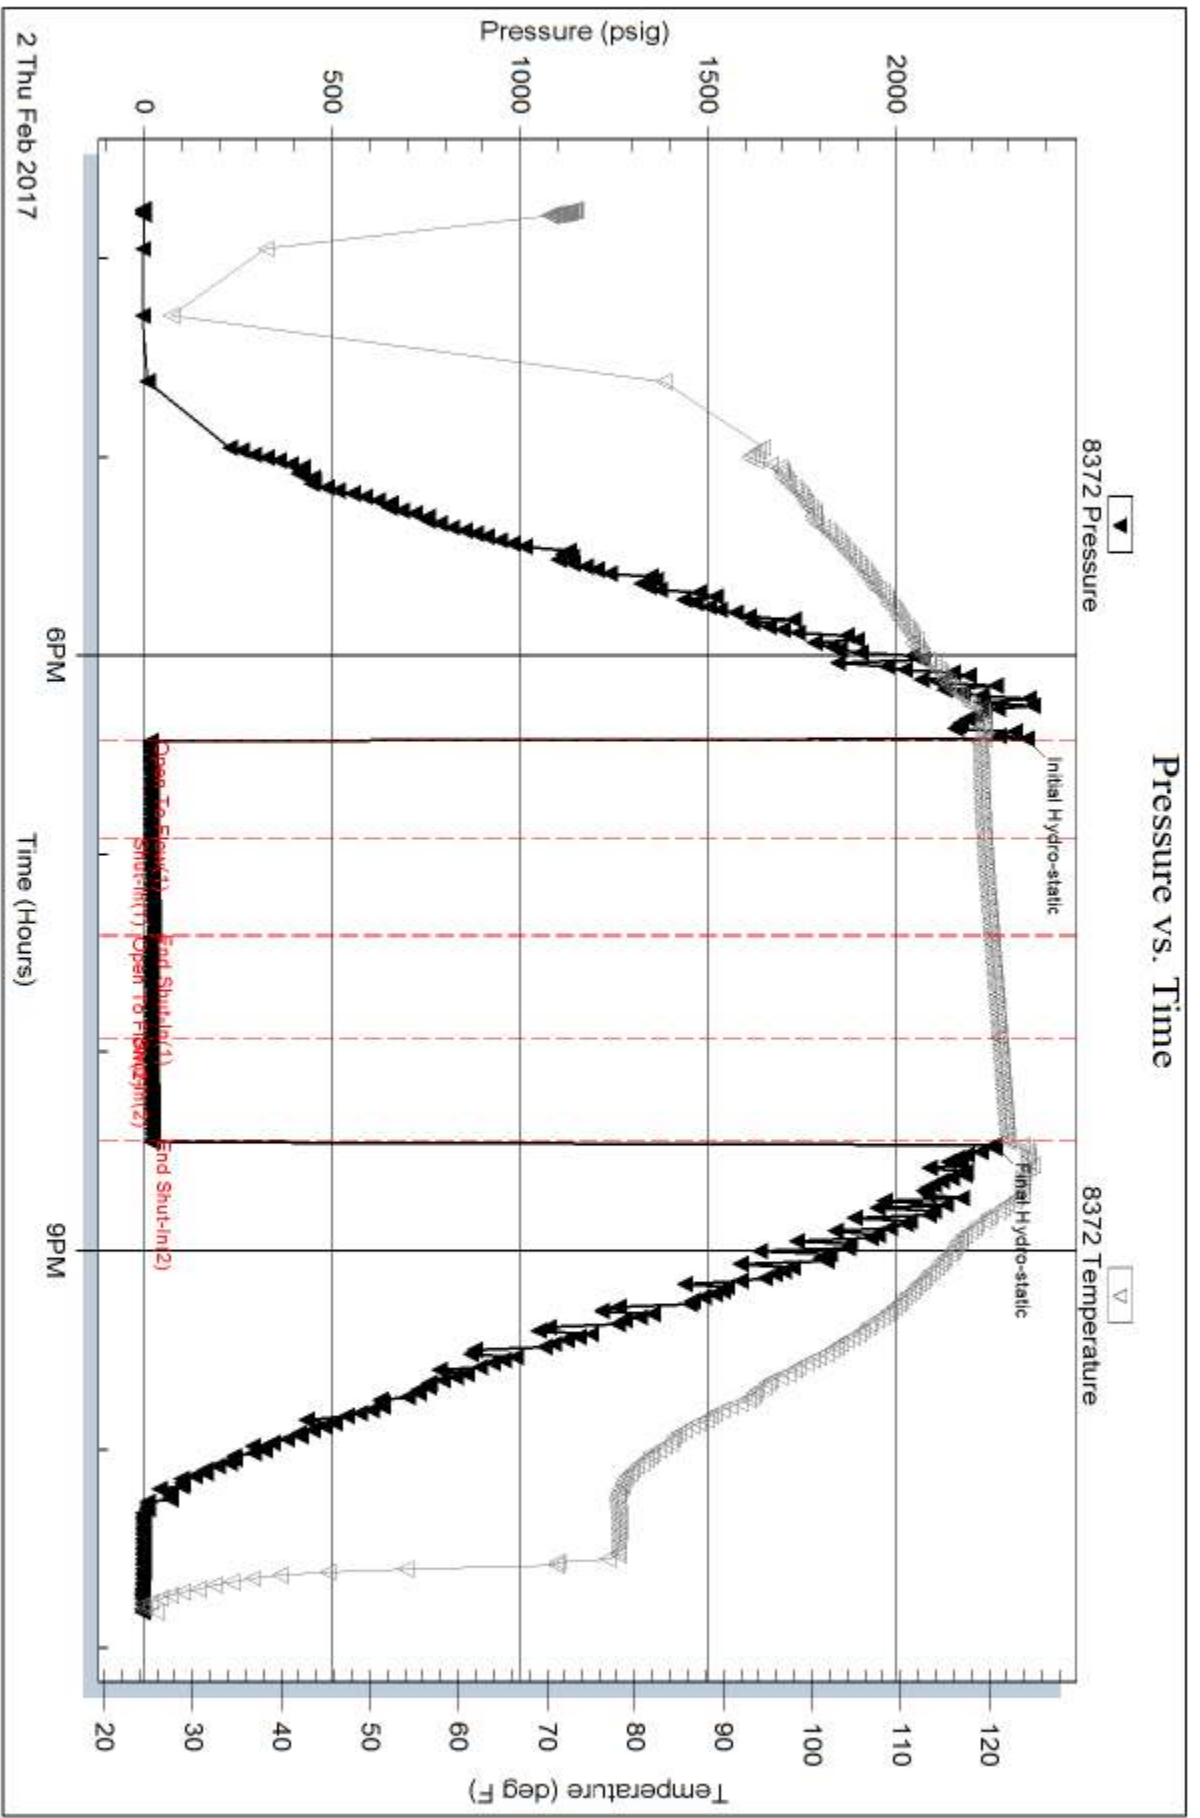

Trilobite Testing, Inc

Ref. No: 64053

Printed: 2017.02.03 @ 07:07:23