



Weatherford

**CML MESSENGER SHUTTLE/COMPACT
PHOTO DENSITY/COMP DUAL NEUT
COMPOSITE LOG**

COMPANY **VESS OIL CORP.**
 WELL **MCCORD 'A' 20H**
 FIELD **BEMIS SHUTTS**
 PROVINCE/COUNTY **ELLIS**
 COUNTRY/STATE **KANSAS**
 LOCATION **1680' FNL & 788' FEL**



SEC **26** TWP **11S** RGE **17W** Other Services
 API Number **1505126218010**
 Permanent Datum G.L., Elevation 2091 feet
 Log Measured From **KB**
 Drilling Measured From **KB @ 9.6 Feet**

Date **11-NOV-2011** Elevations: **KB 2100.60**
DF 2099.00
GL 2091.00

Run Number	ONE	TWO
Depth Driller	3740.00 feet	5805.00 feet
Depth Logger	3737.00 feet	5805.00 feet
First Reading	3737.00 feet	5780.00 feet
Last Reading	1279.00 feet	3740.00 feet
Casing Driller	1279.00 feet	3740.00 feet
Casing Logger	1279.00 feet	3740.00 feet
Bit Size	8.750 inches	6.125 inches
Hole Fluid Type	WATER BASED	CHEM
Density / Viscosity	9.20 lb/USg	9.20 lb/USg
PH / Fluid Loss	10.50	10.50
Sample Source	FLOWLINE	FLOWLINE
Rm @ Measured Temp	0.70 @ 78.0 ohm-m	0.80 @ 55.0 ohm-m
Rmf @ Measured Temp	0.60 @ 75.0 ohm-m	0.64 @ 55.0 ohm-m
Rmc @ Measured Temp	0.82 @ 75.0 ohm-m	0.96 @ 55.0 ohm-m
Source Rmf / Rmc	MEASURE	CALC
Rm @ BHT	0.56 @ 100.0 ohm-m	0.41 @ 105.0 ohm-m
Time Since Circulation	5.8 HOURS	6 HOURS
Max Recorded Temp	100.00 deg F	105.00 deg F
Equipment Name	HALLIBURTON	COMPACT
Equipment / Base	107829 LIBERA	18006 OKC
Recorded By	C. MARLOWE	D. ROWELL
Witnessed By	R. MARTIN / M. ANDREPOINT	R. MARTIN

RUN #2 BOREHOLE RECORD		Last Edited: 23-NOV-2011 10:42
Bit Size inches	Depth From feet	Depth To feet
6.125	3740.00	5805.00

RUN #2 CASING RECORD			
Type	Size inches	Depth From feet	Shoe Depth feet
INTERMED	7.000	0.00	3740.00
			Weight pounds/ft
			26.00

REMARKS

RUN #1
 LOGGED BY HALLIBURTON
 ANNULAR HOLE VOLUME CALCULATED FOR 7 INCH CASING
 CHLORIDES REPORTED AT 3400 PPM
 GPS COORDINATES 39°04' N ,99°10' W

RUN #2
 LOGGED BY WEATHERFORD
 WLS LOGGING SOFTWARE VERSION 11.02.3186 WAS USED
 ALL LOGS WERE SET TO DEPTH WITH MWD GAMMA RAY
 LAT: 39.06994 N
 LONG: 99.16968 W
 DRILL PIPE DEPTH DURING DEPLOYMENT: 5680
 LOGGING TOOL DEPTH AFTER DEPLOYMENT: 5780
 4.5 INCH PRODUCTION CASING USED TO CALCULATE AHV
 OPERATORS: M FISHER, J. TURNER
 S.O: 3534253

COMPOSITE
 GAMMA RAY MERGED AT 3695' ALL OTHER DATA MERGE AT 3742'

All interpretations are opinions based on inferences from electrical or other measurements and we cannot, and do not, guarantee the accuracy or correctness of any interpretations, and we shall not, except in the case of gross or wilful negligence on our part, be liable or responsible for any loss, costs, damages or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions in our price schedule.

5 INCH MAIN LOG

Depth Based Data - Maximum Sampling Increment 10.0cm Plotted on 02-DEC-2011 17:20
 Filename: C:\DOCUME~1\hopkinjg\LOCALS~1\Temp\Weatherford ...\McCord 'A' 20H_(Composite)_dta Recorded on |
 System Versions: Plotted with 12.01.3513

<u>Density Caliper</u>		
in		
5	15	25
<u>Caliper</u>		
in		
5	15	25
<u>Bit Size</u>		
inches		
5	15	25
<u>Gamma Ray</u>		
gapi		
0	75	150
150	225	300
<u>Tension</u>		
lbs		
10000	5000	0


Depth in Feet

Replay Scale 1:240

12

<u>Limestone Neutron Por.</u>				
dec(Is)				
0.30	0.20	0.10	0.00	-0.10
0.70	0.60	0.50	0.40	0.30
<u>Neu Por Lime</u>				
dec(Is)				
0.30	0.20	0.10	0.00	-0.10
0.70	0.60	0.50	0.40	0.30
<u>Limestone Density Por.</u>				
dec(Is)				
0.30	0.20	0.10	0.00	-0.10
0.70	0.60	0.50	0.40	0.30
<u>Den Phi Lime</u>				
dec(Is)				
0.30	0.20	0.10	0.00	-0.10
0.70	0.60	0.50	0.40	0.30
<u>PE</u>		<u>Density Correction</u>		
b/e		g/c3		
0	5	10	-0.25	0
<u>PE</u>		<u>Density Correction</u>		
b/e		g/c3		
0	5	10	-0.25	0



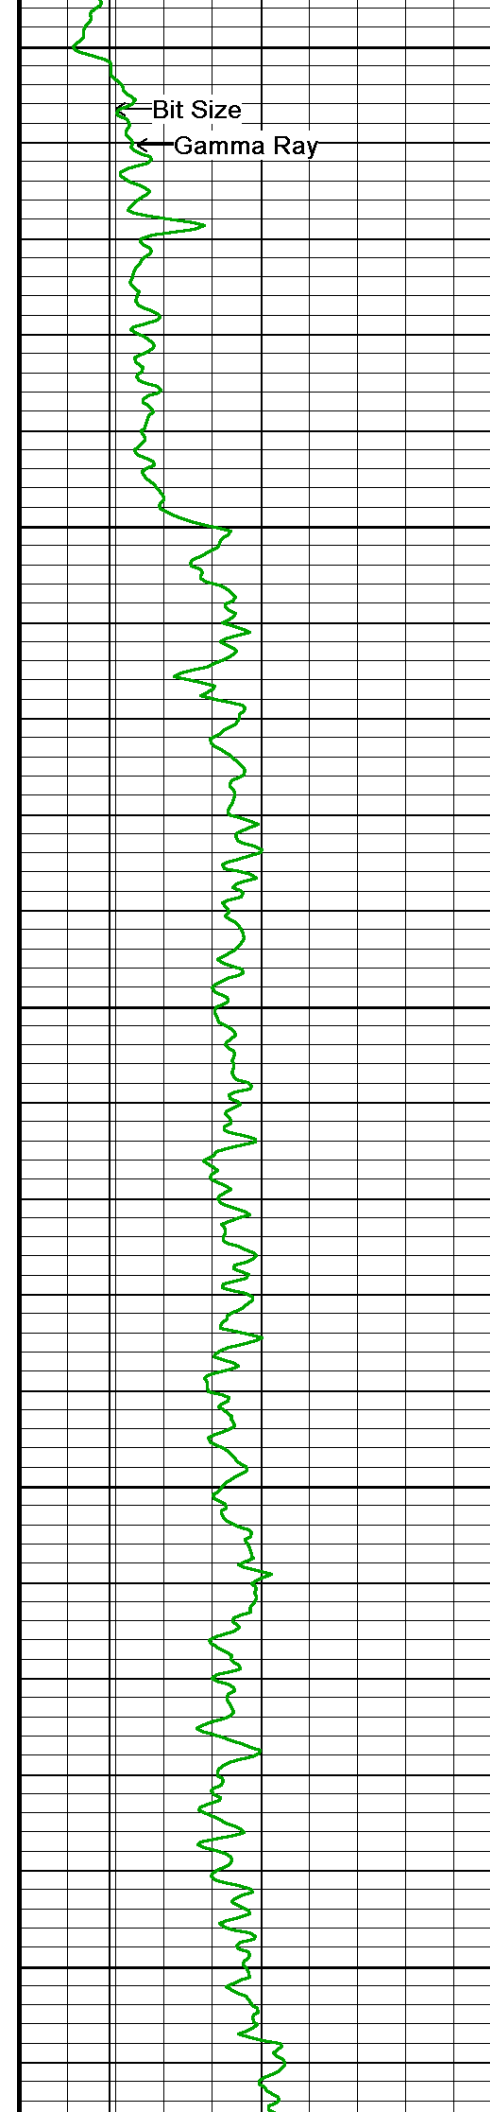

50

100


150


200

250

Bit Size

Gamma Ray

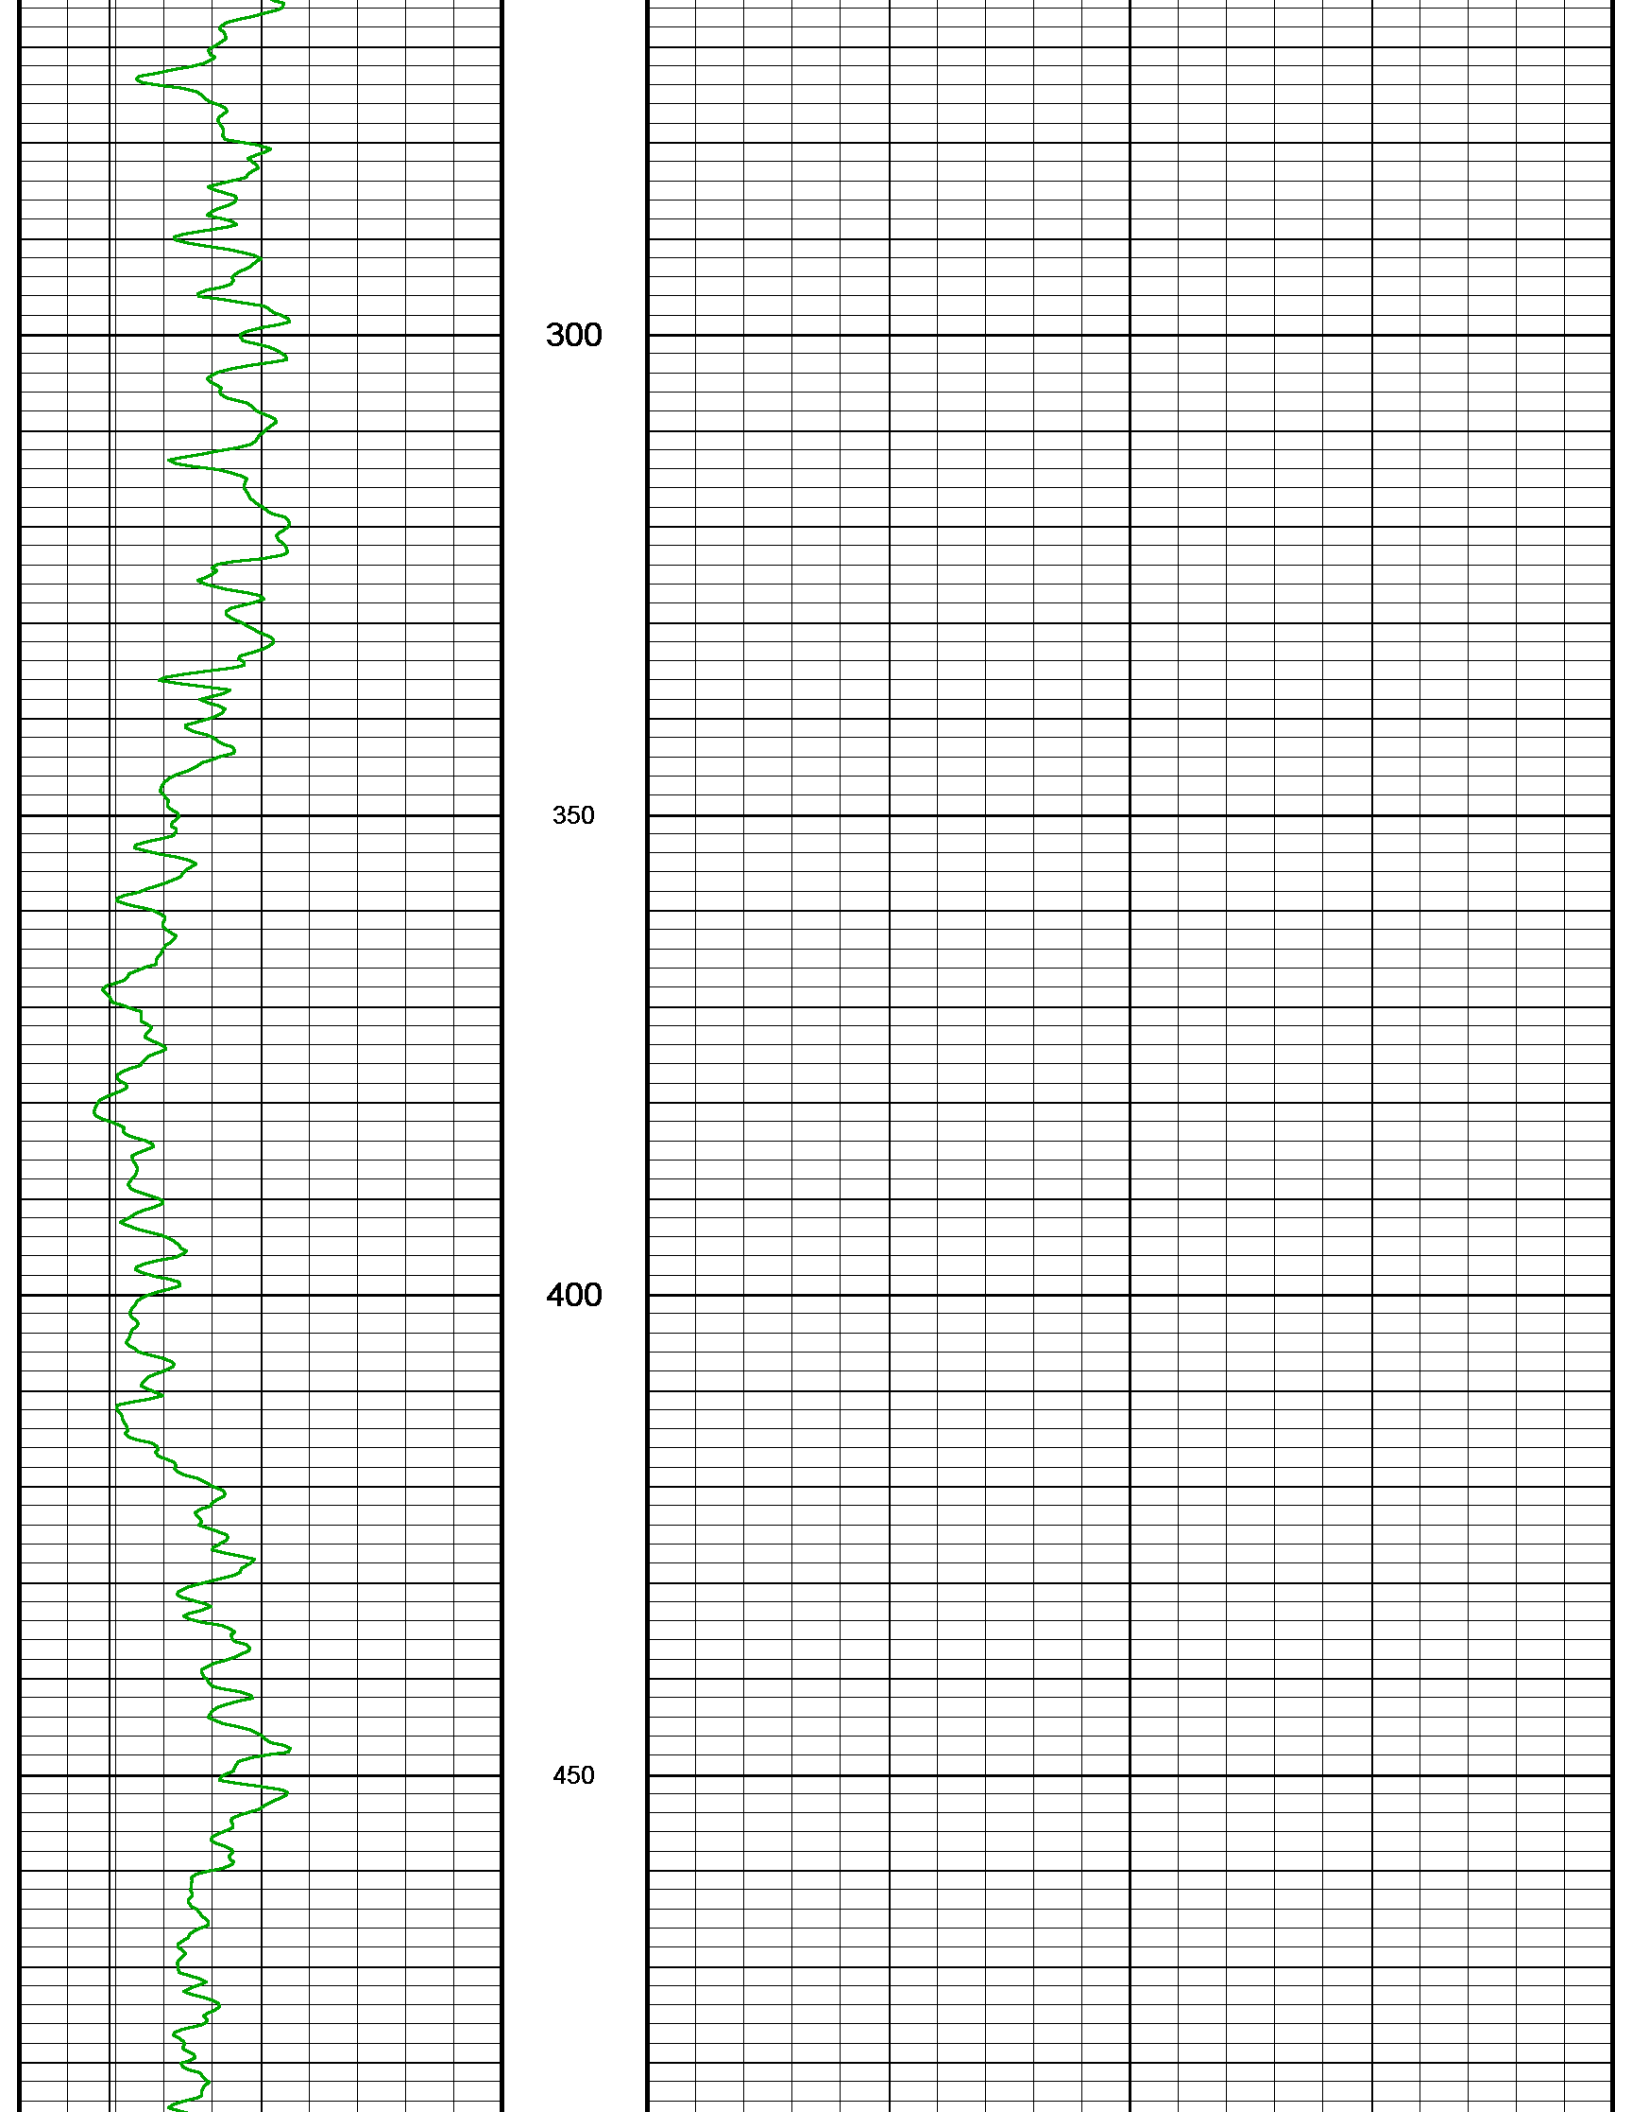

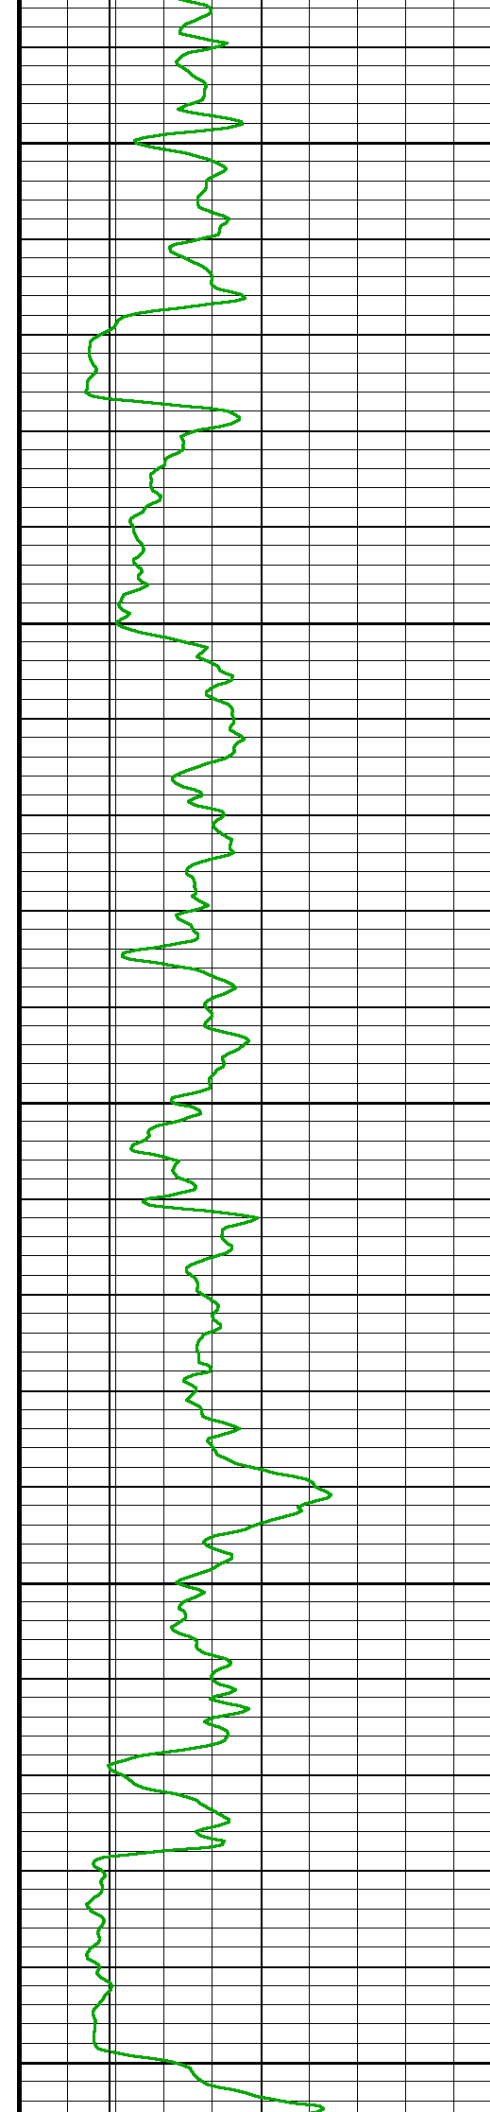


500

550

600

650

700

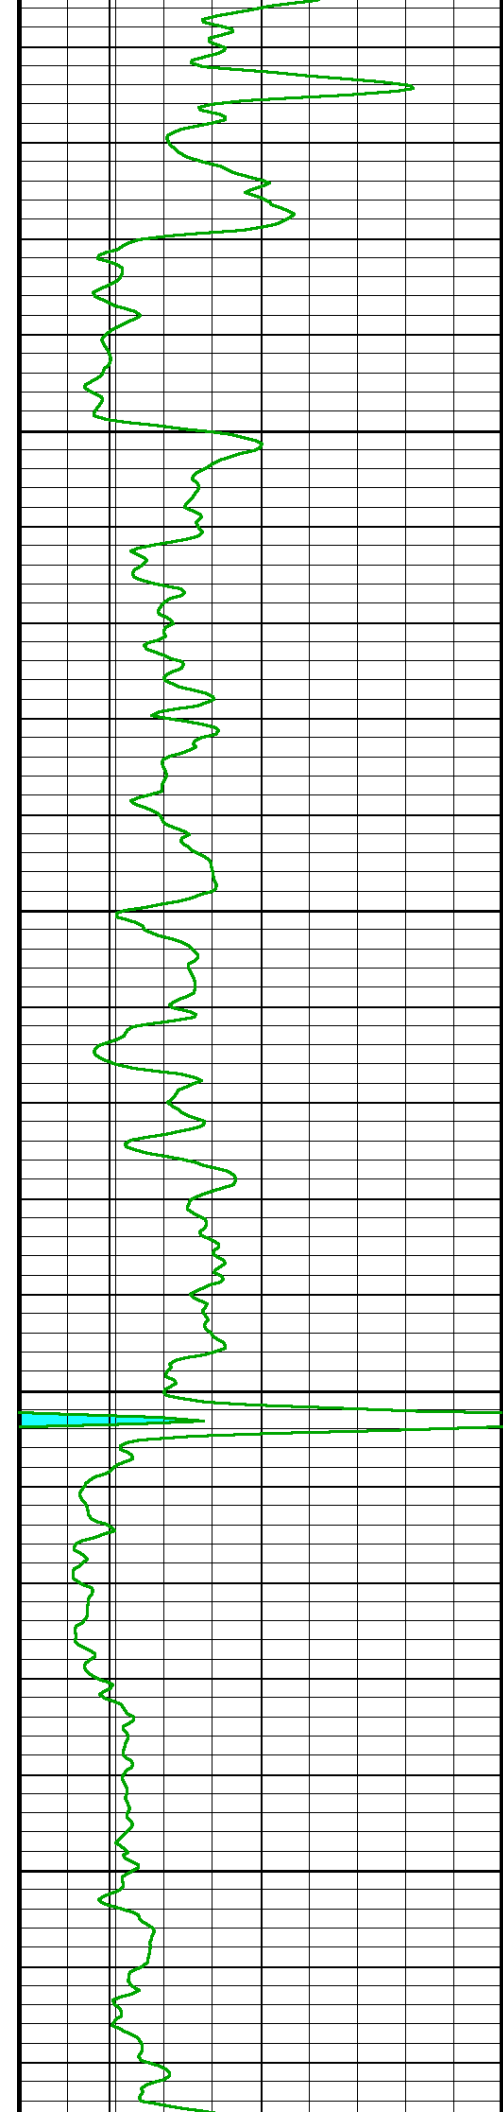


750

800

850

900

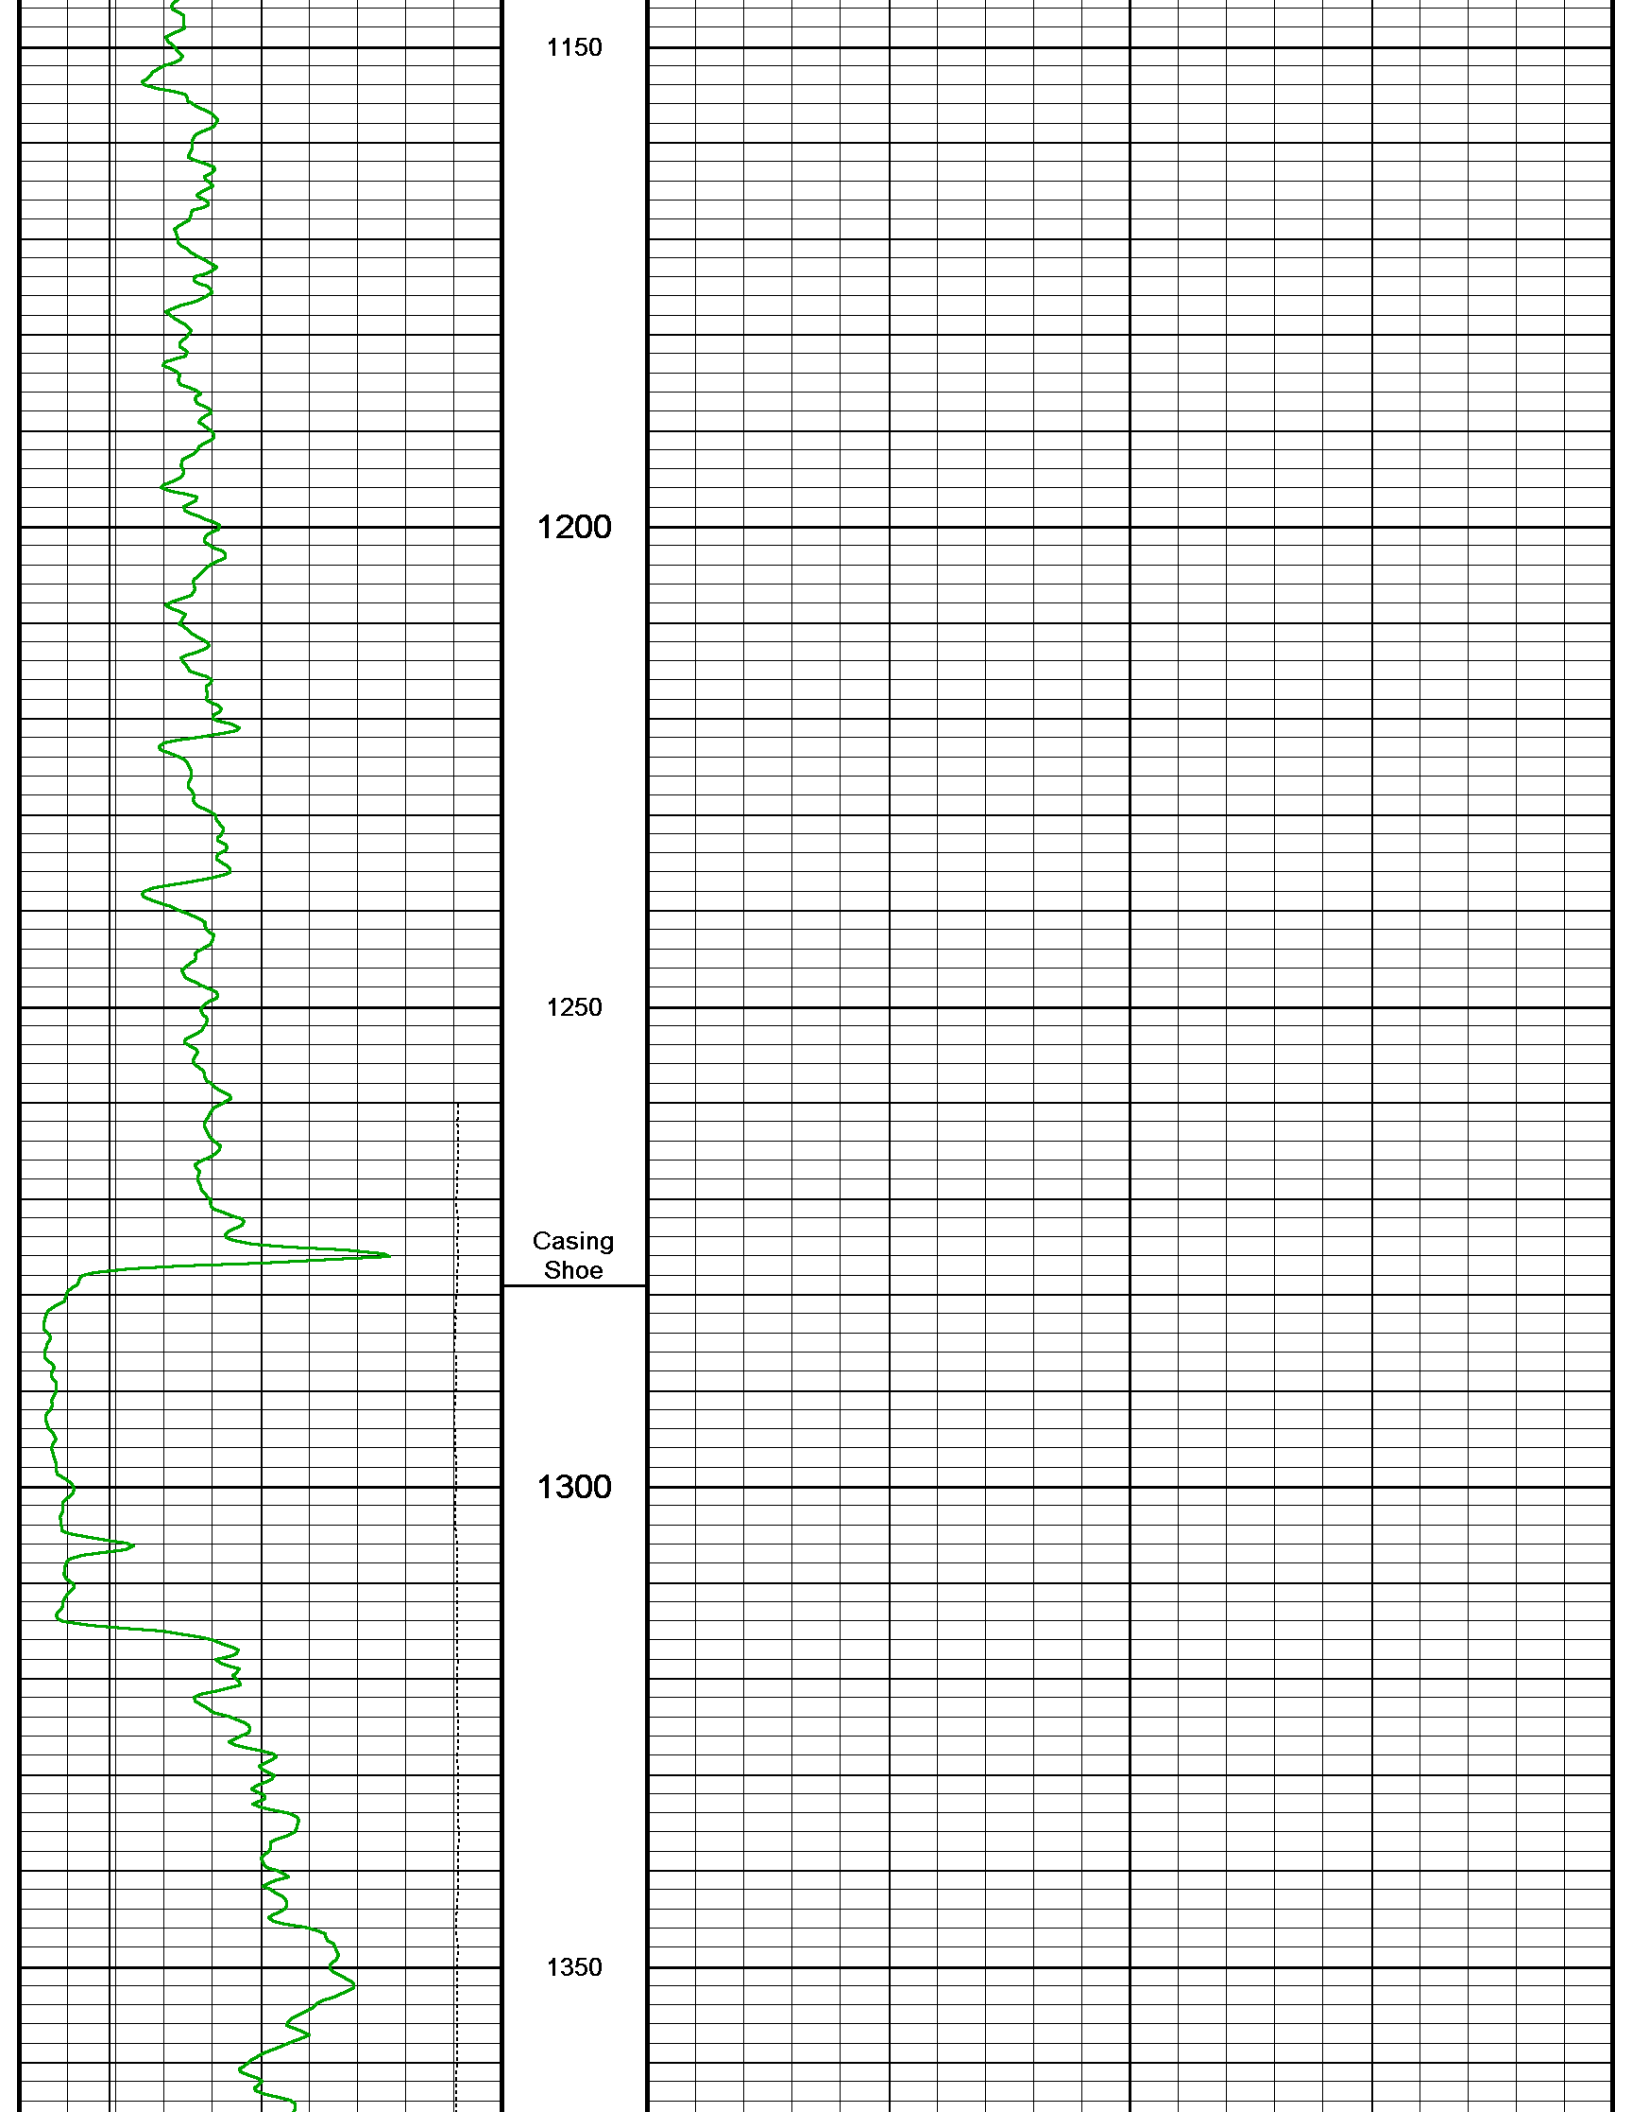

1150


1200


1250


Casing
Shoe

1300

1350

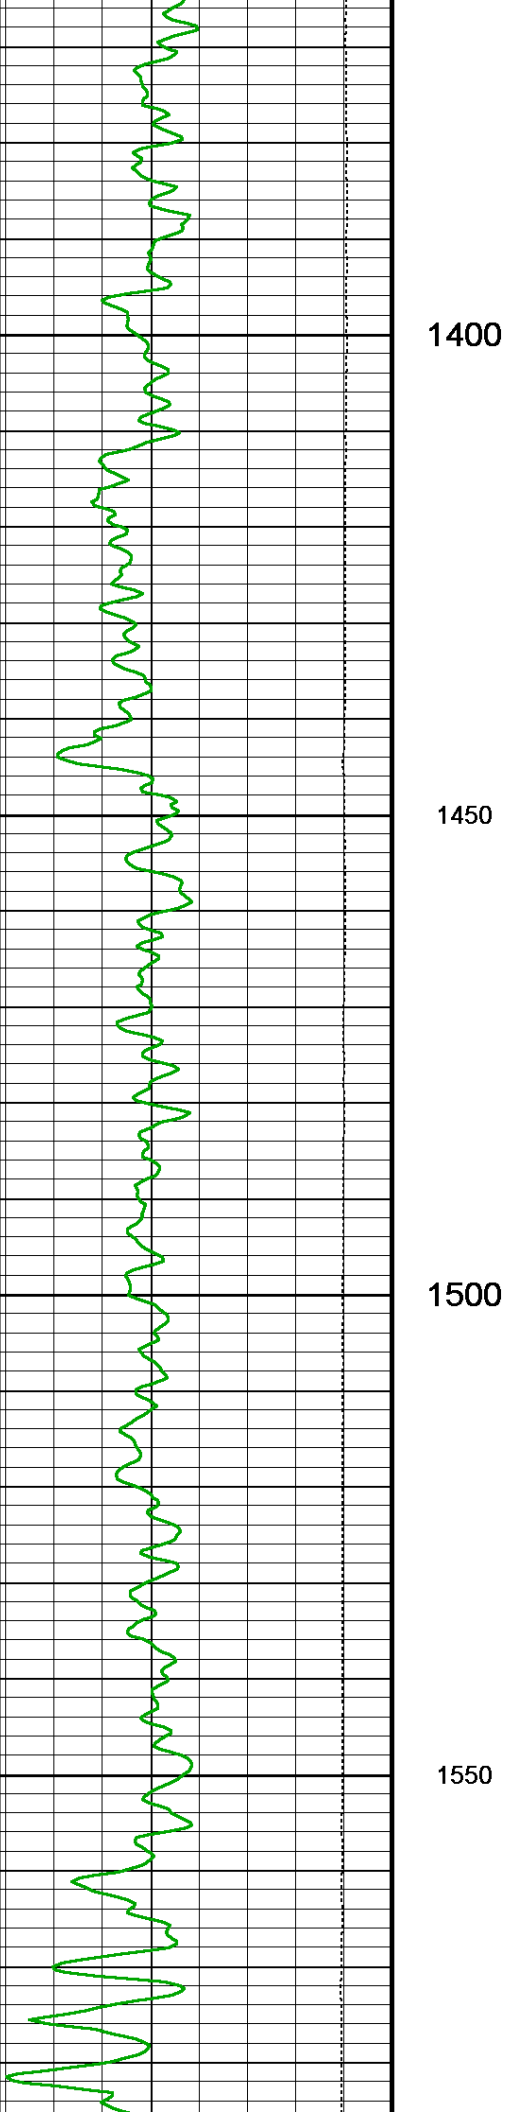

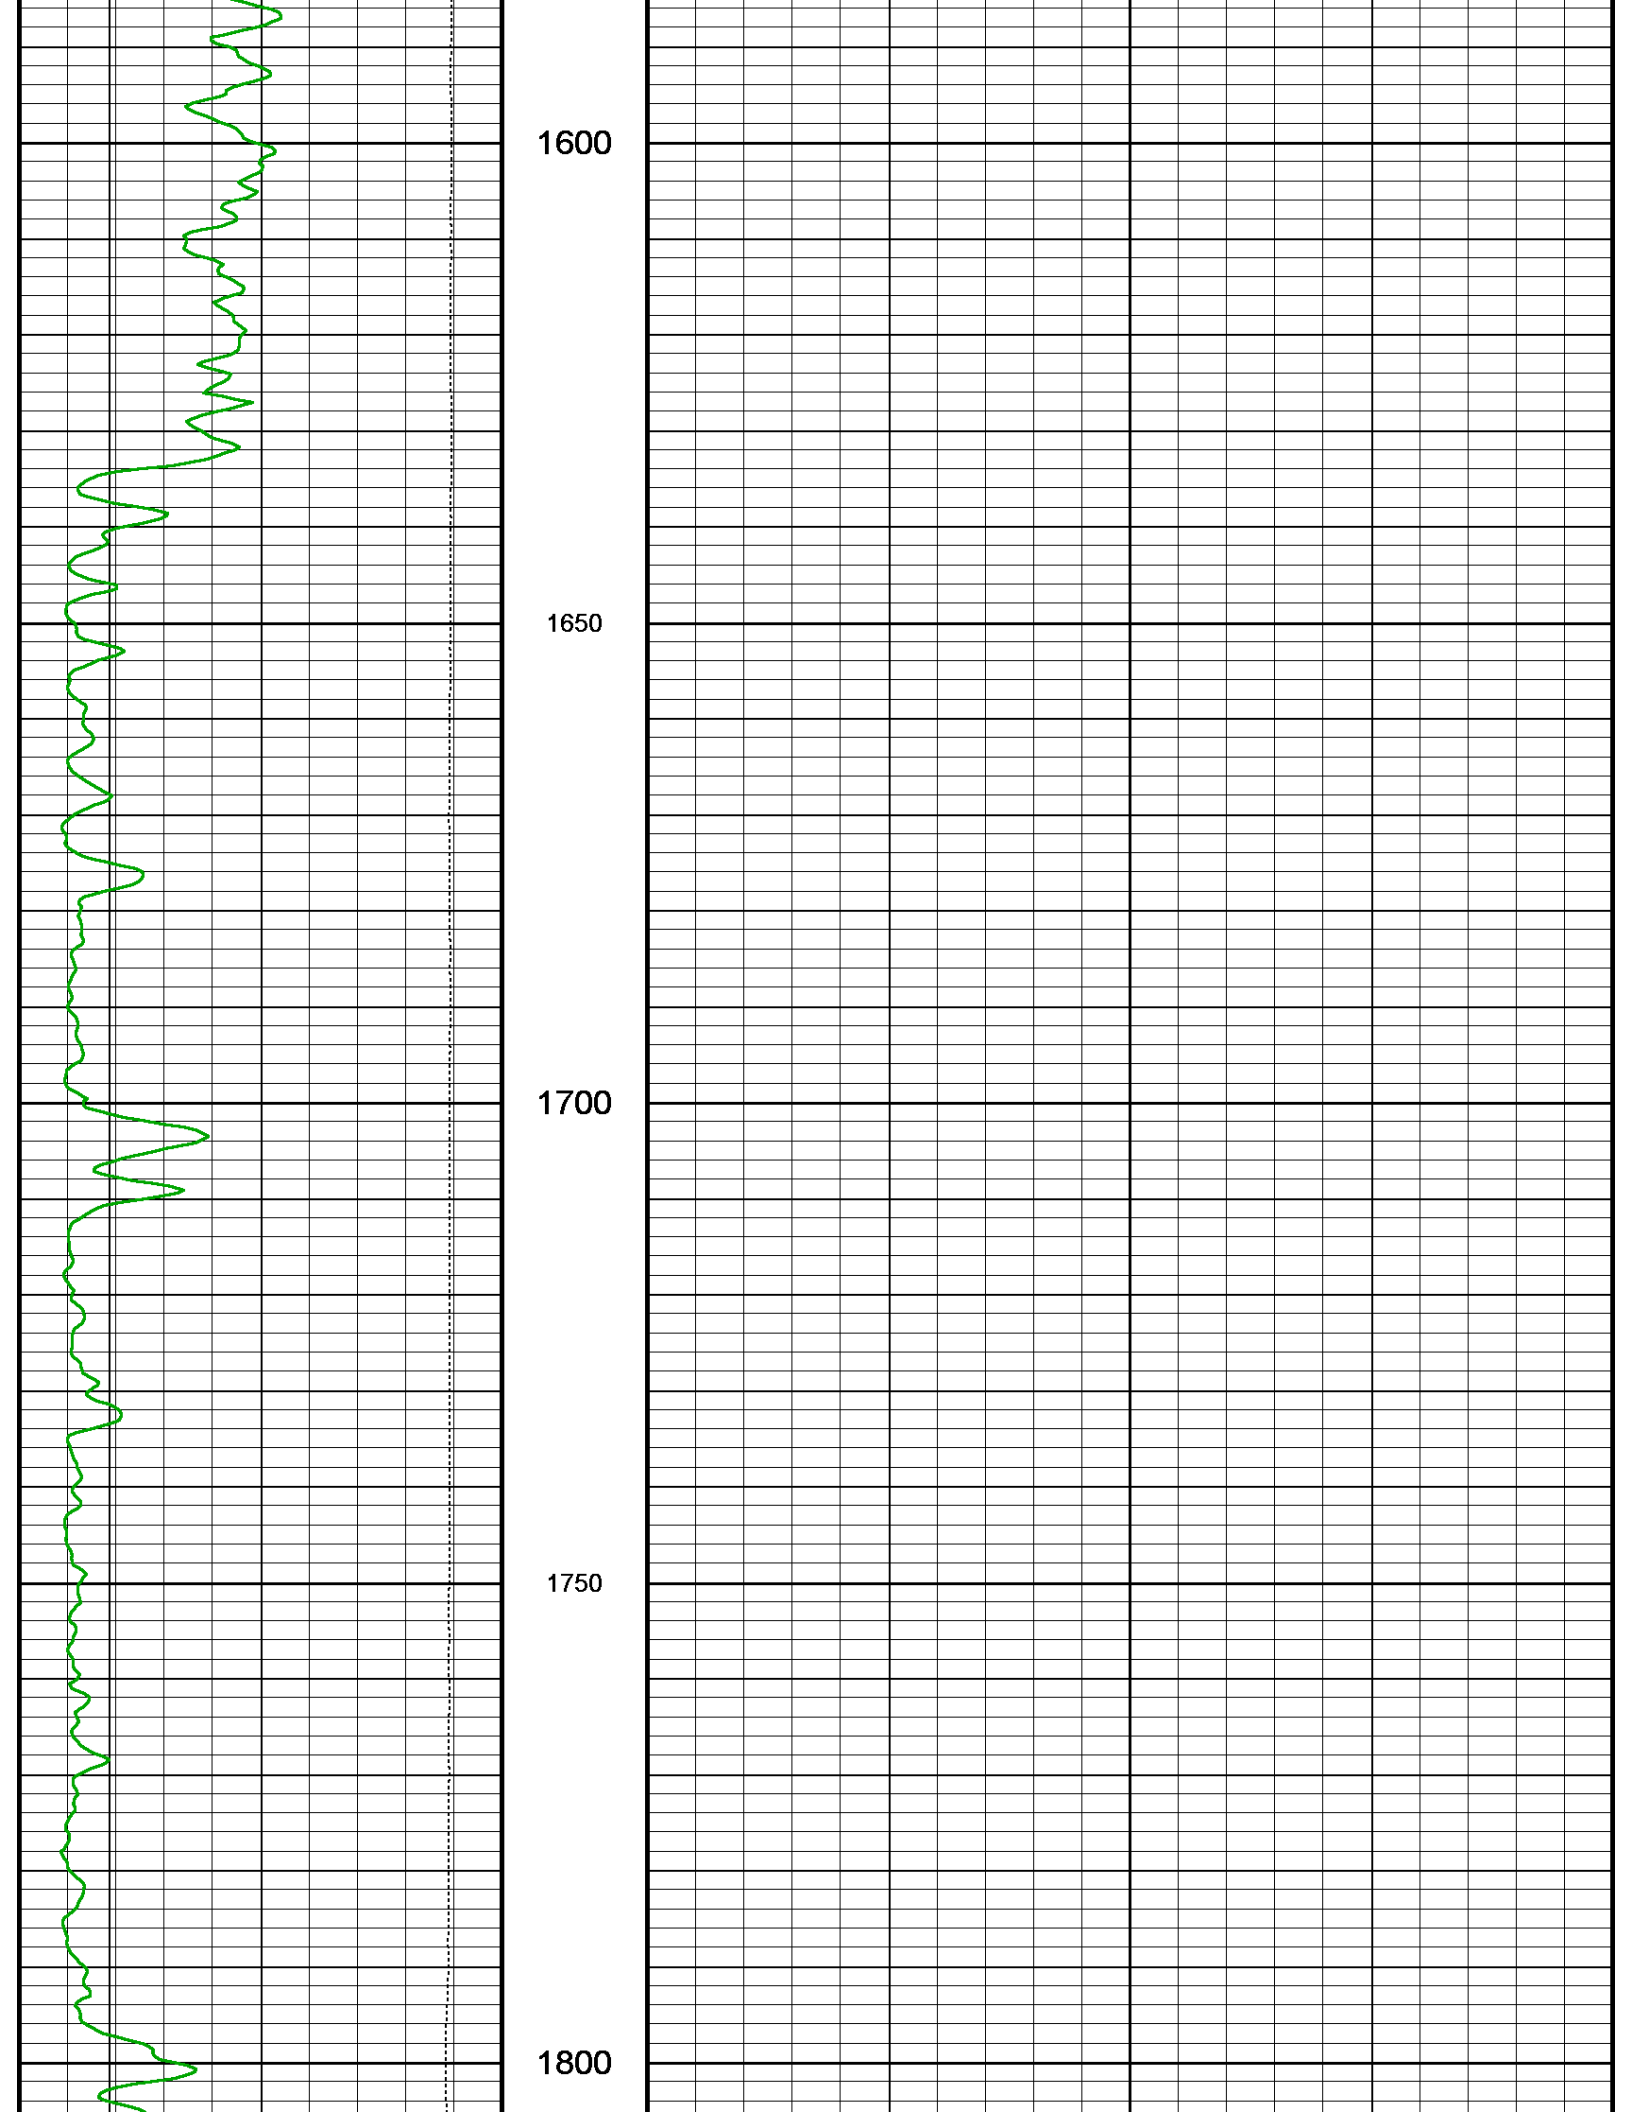

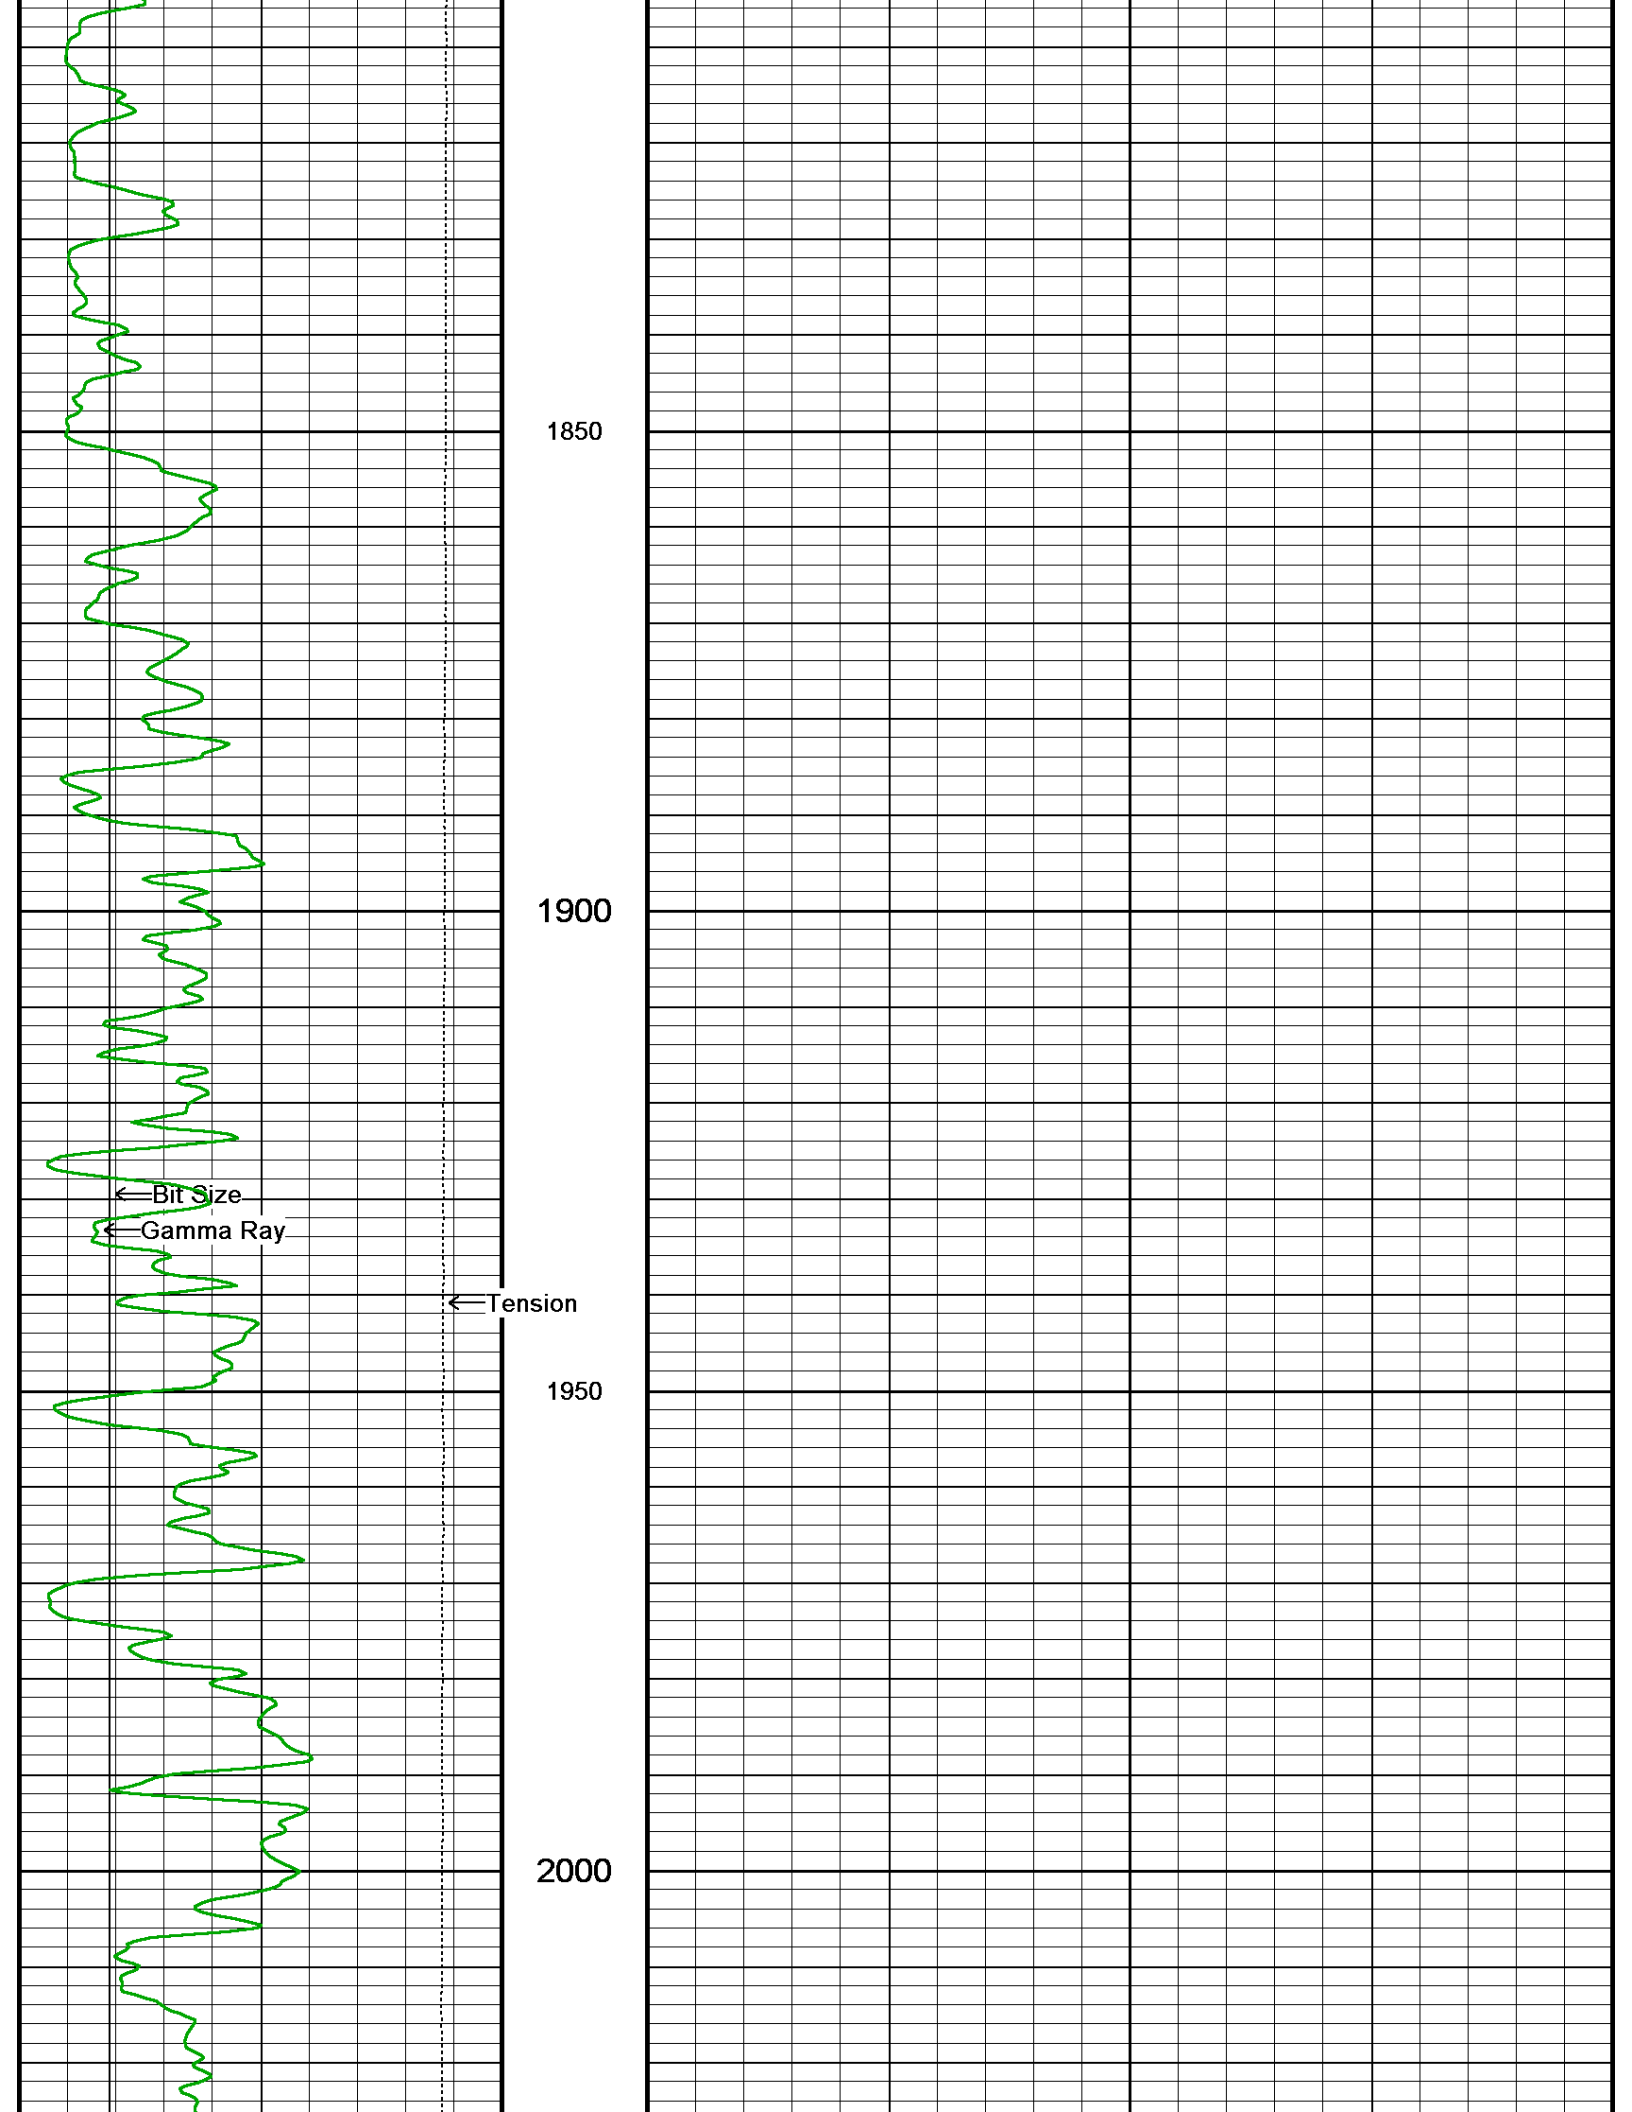

1850

1900


1950

2000

← Bit Size

← Gamma Ray

← Tension

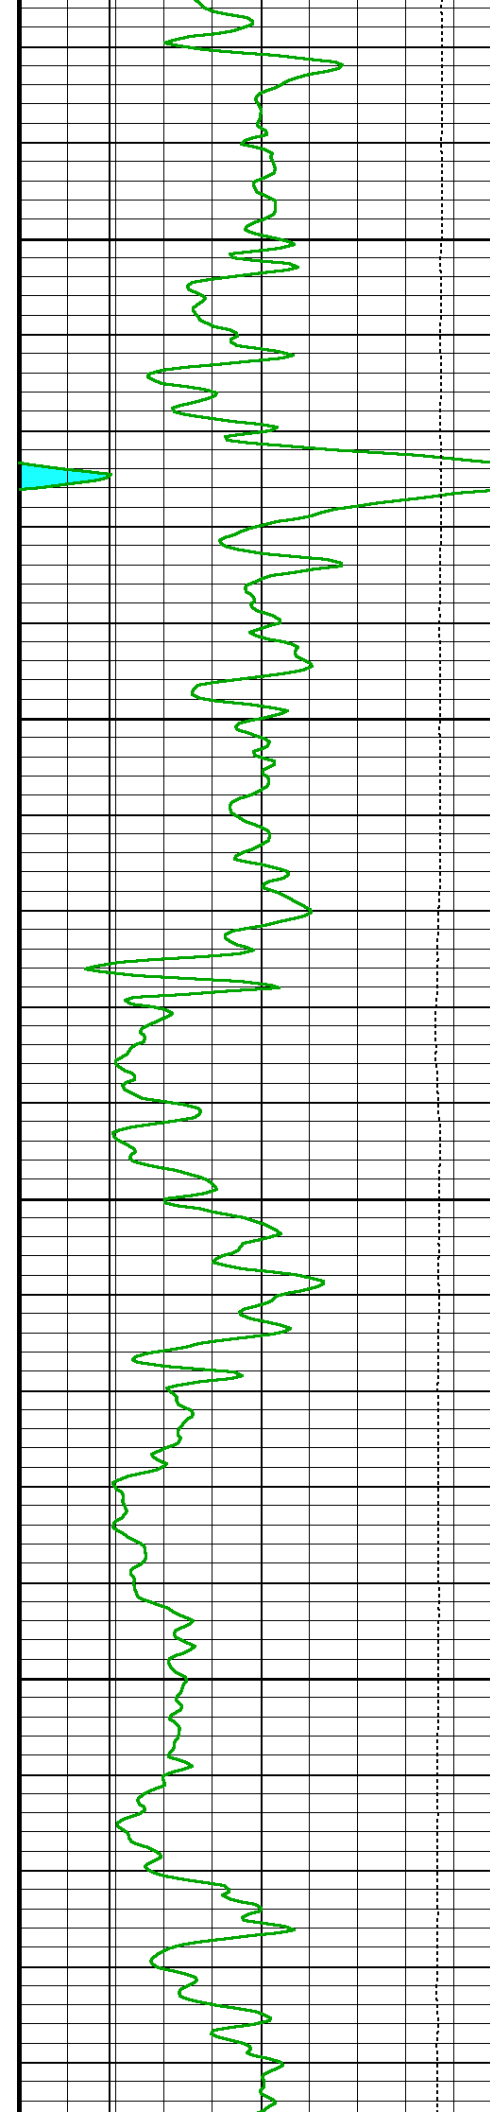



2050

2100

2150

2200

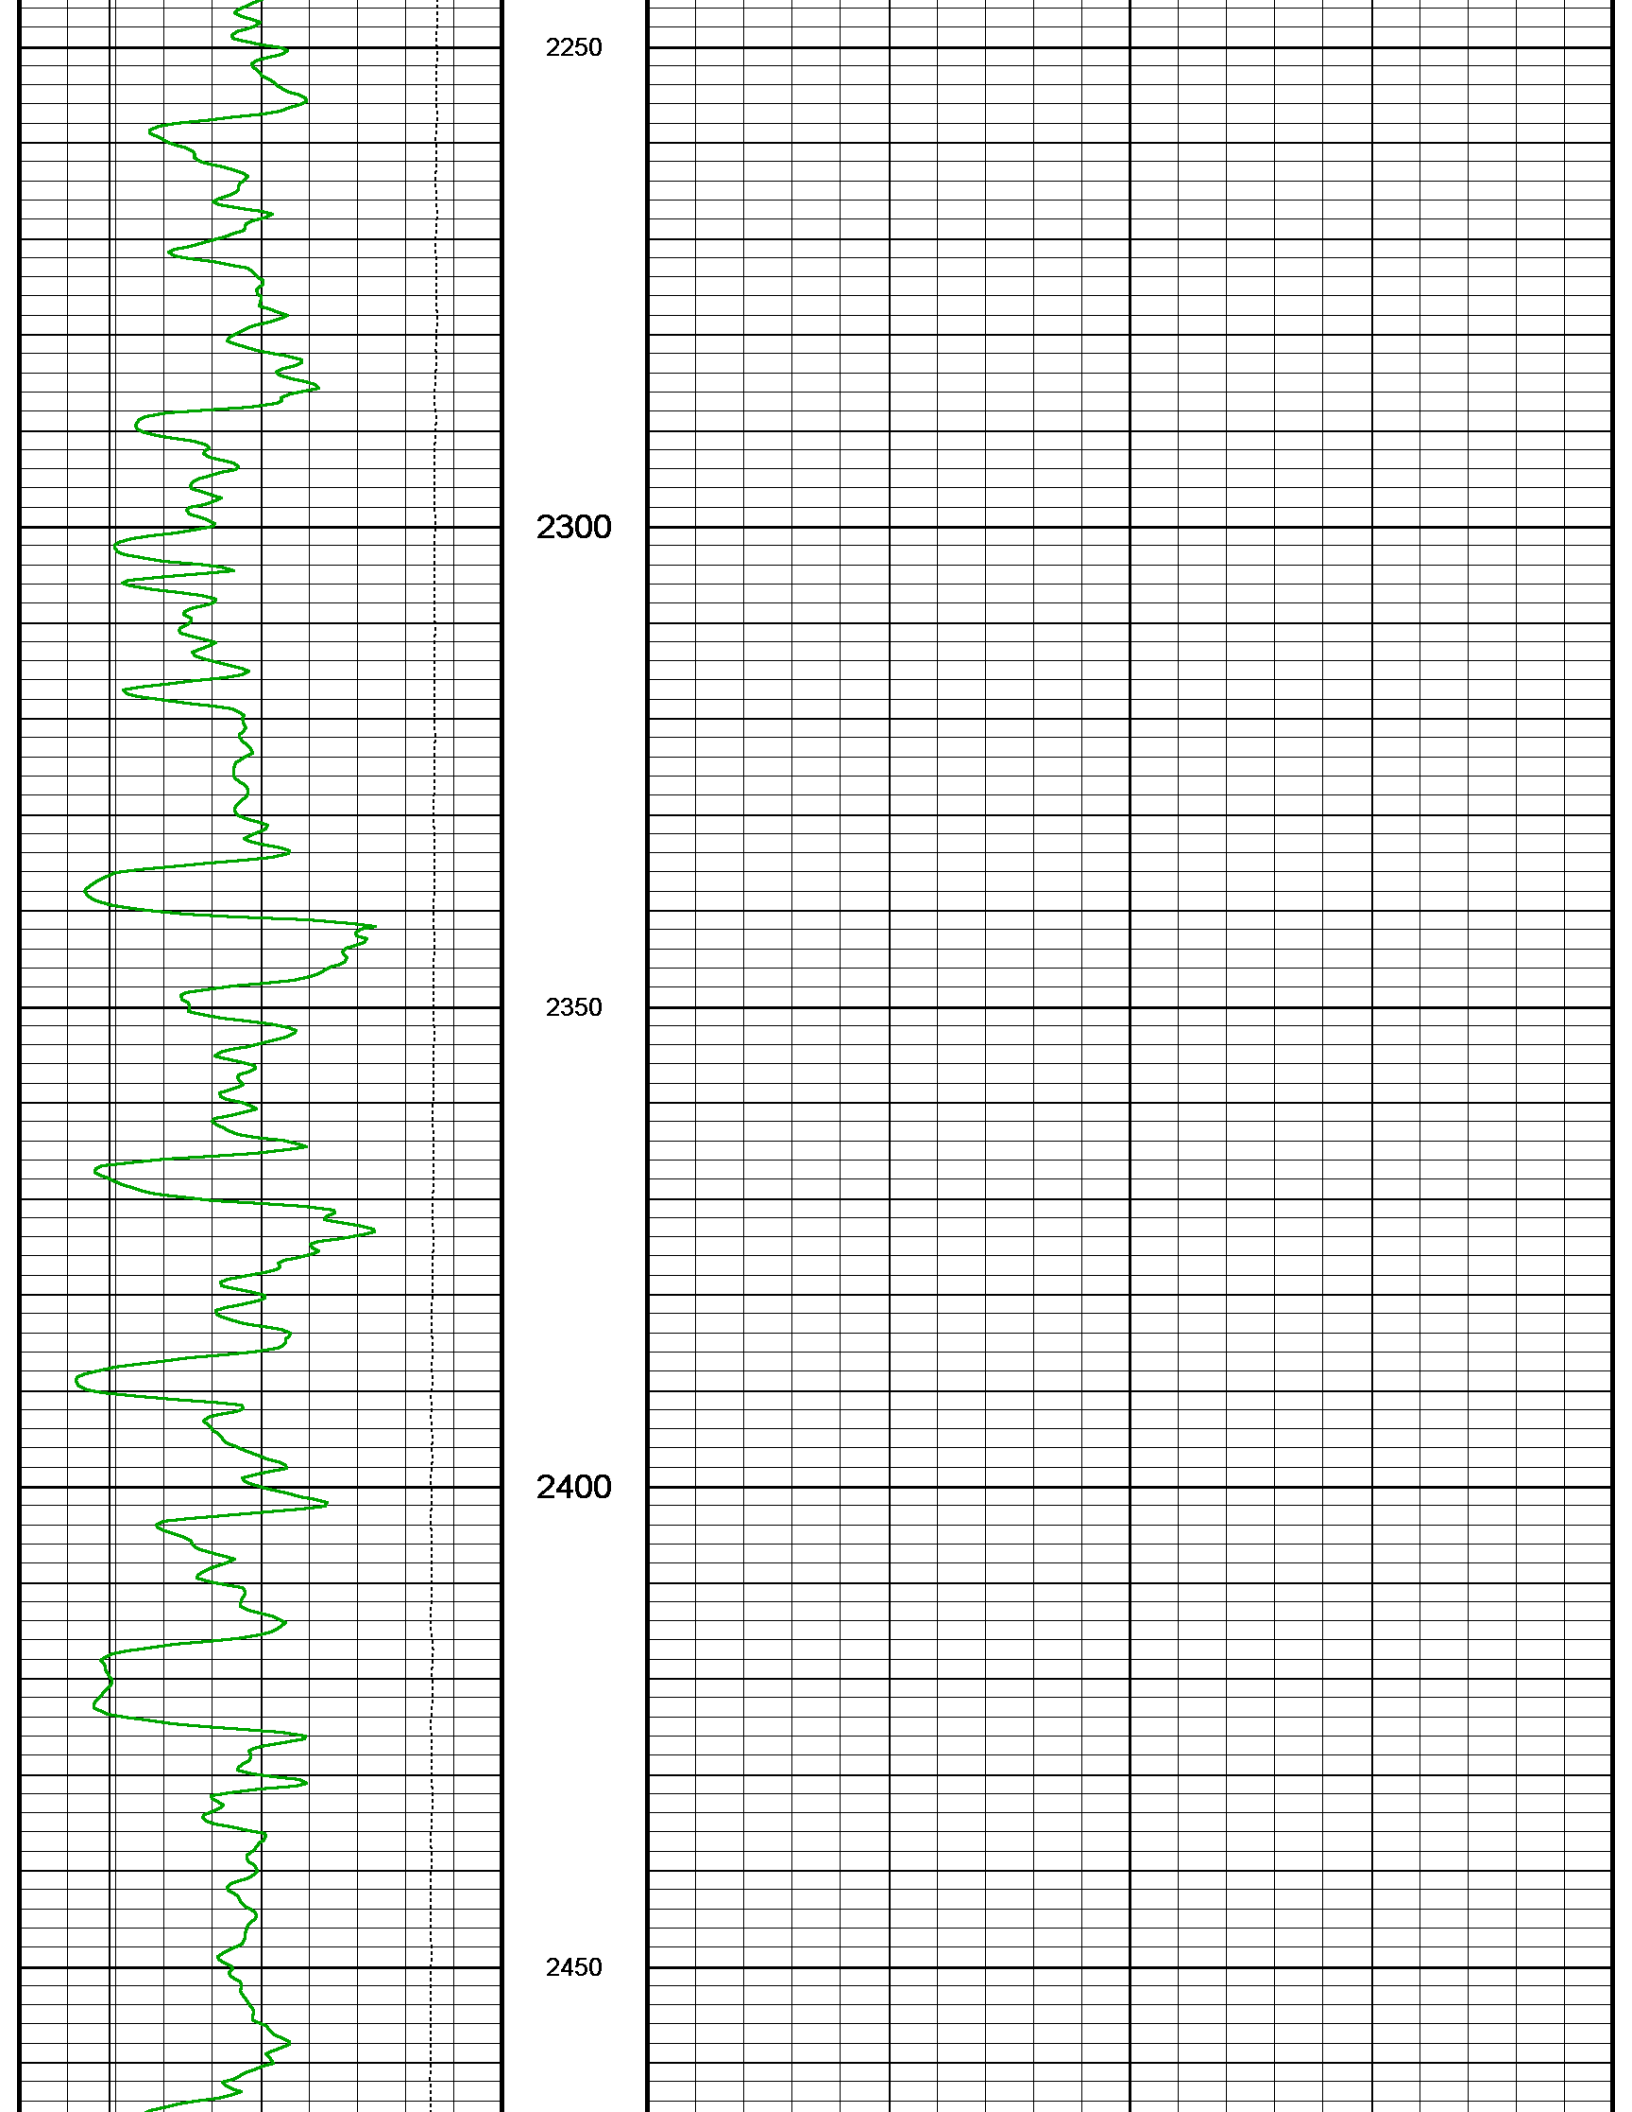

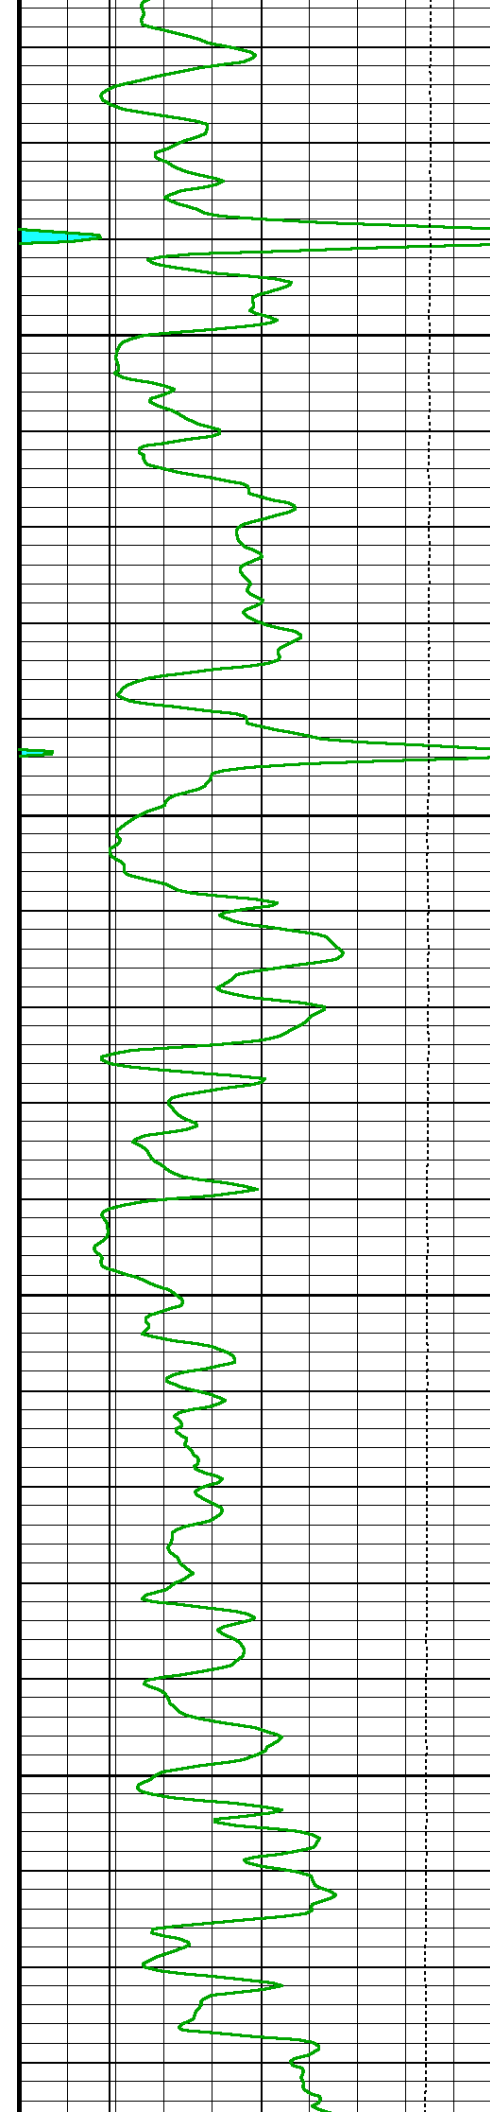



2500

2550

2600

2650

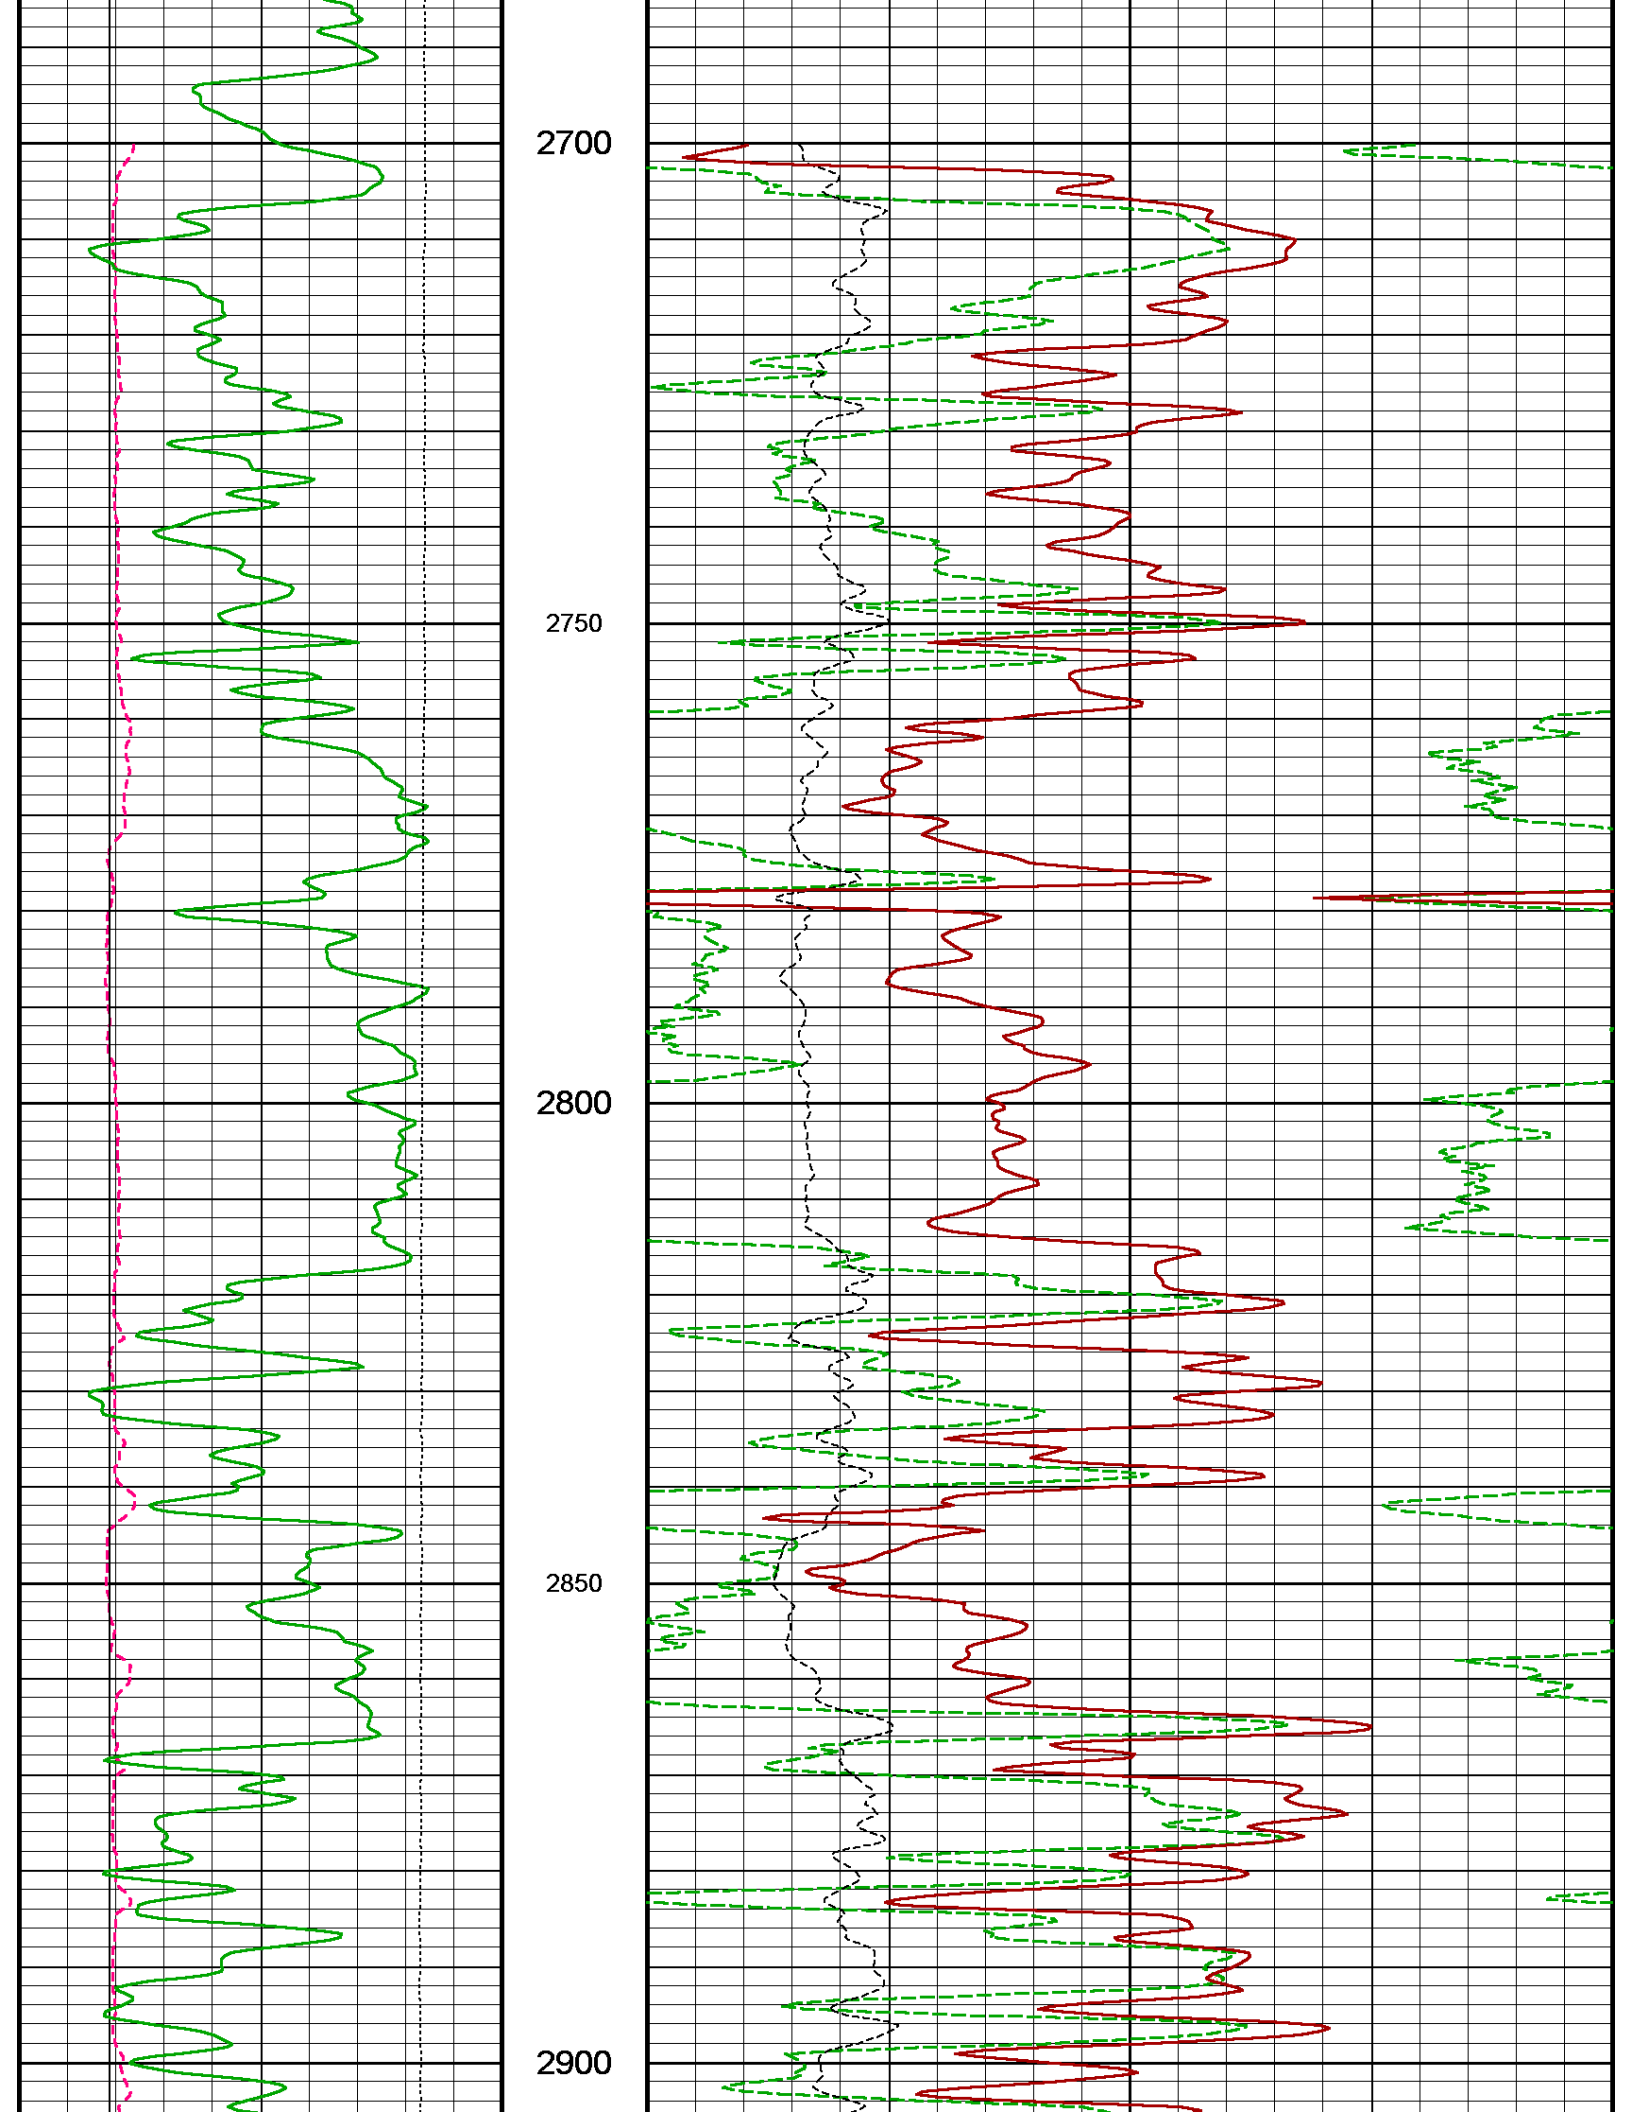

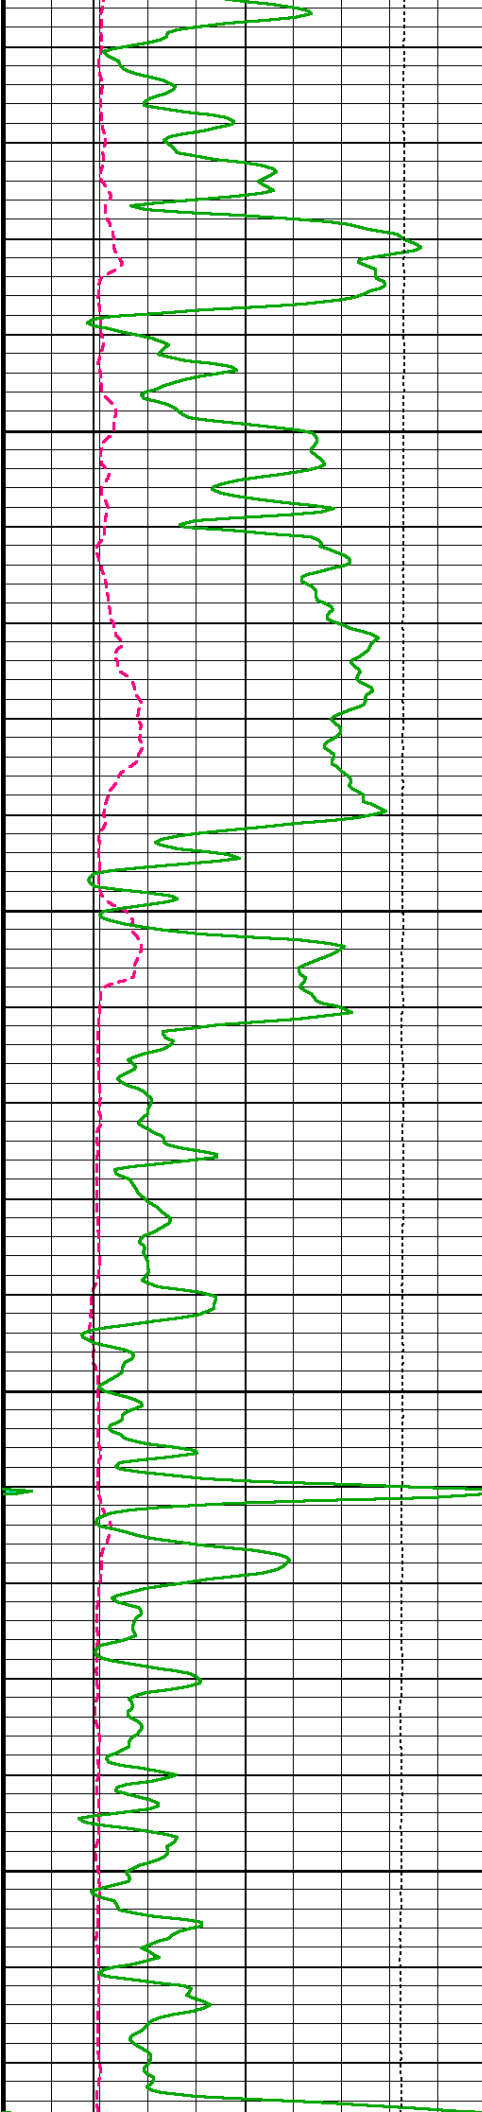



2950

3000

3050

3100

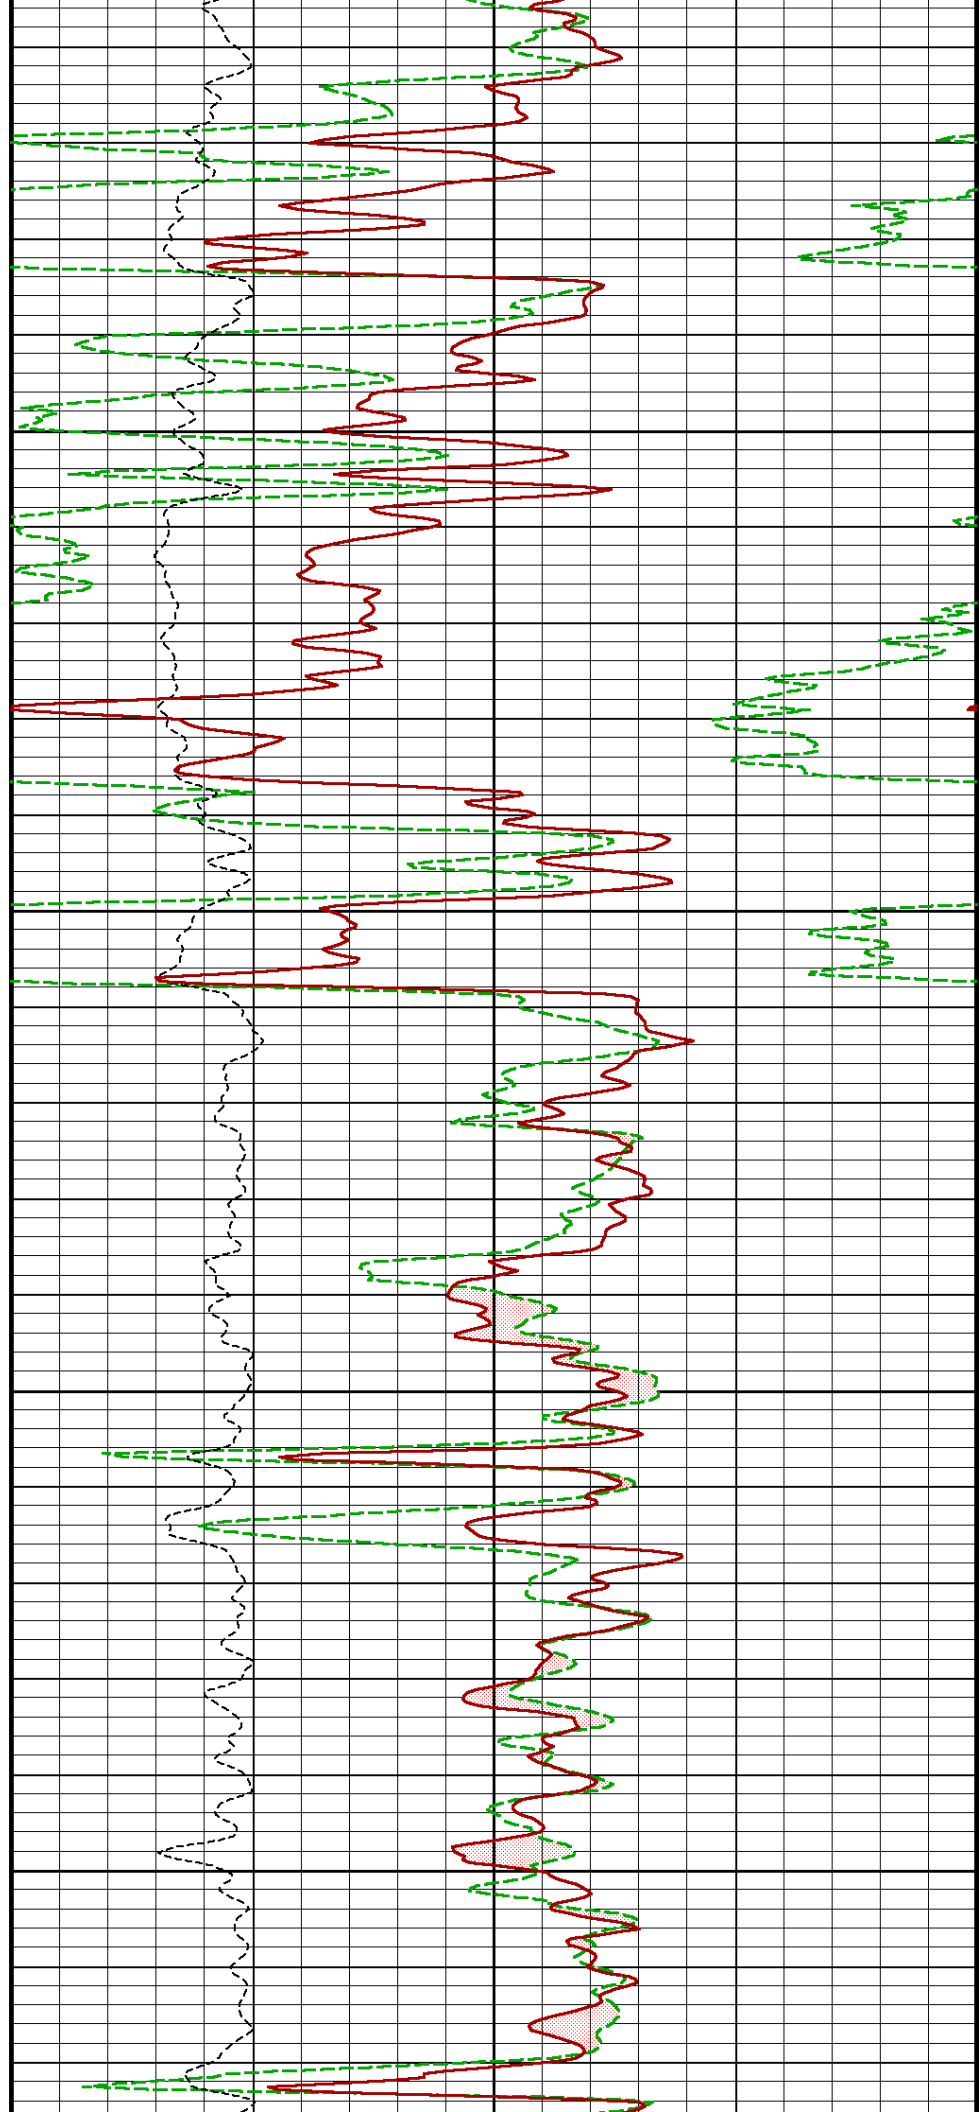

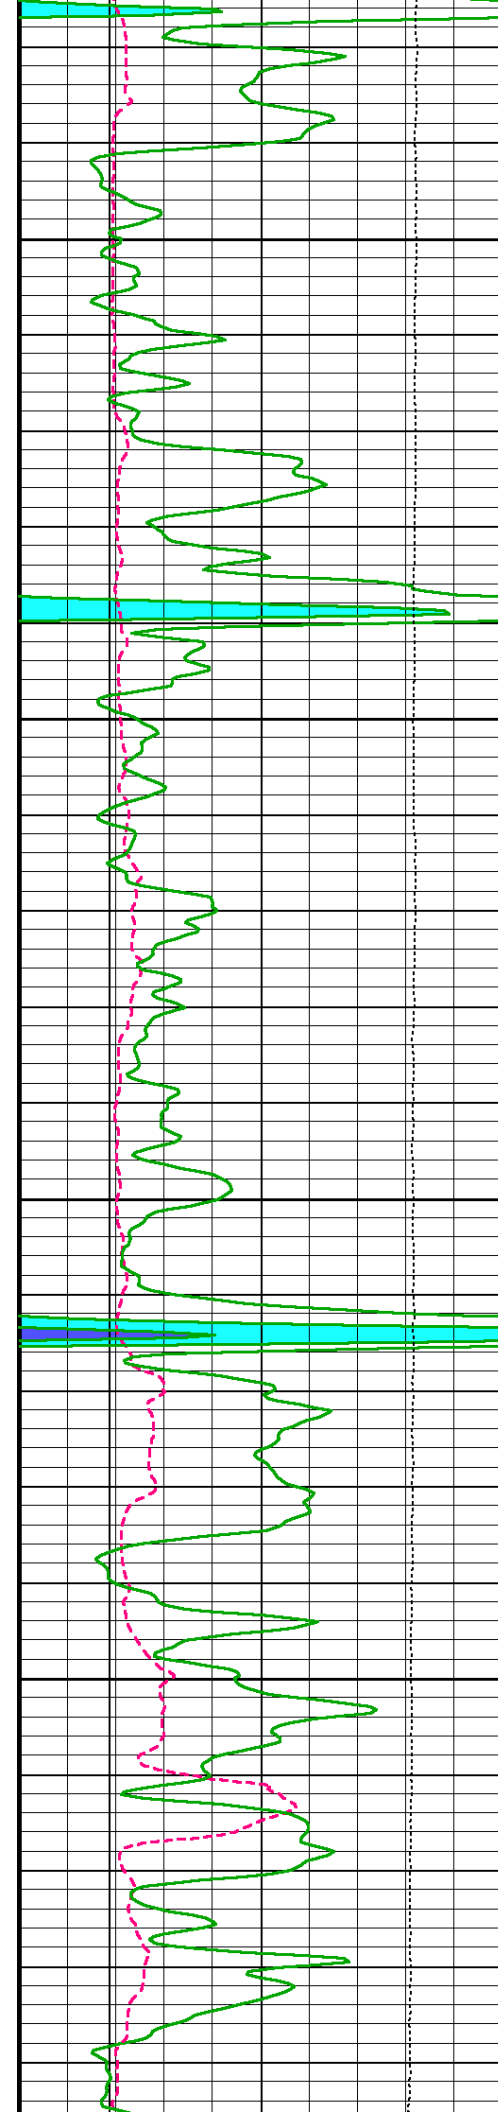



3150

3200

3250

3300

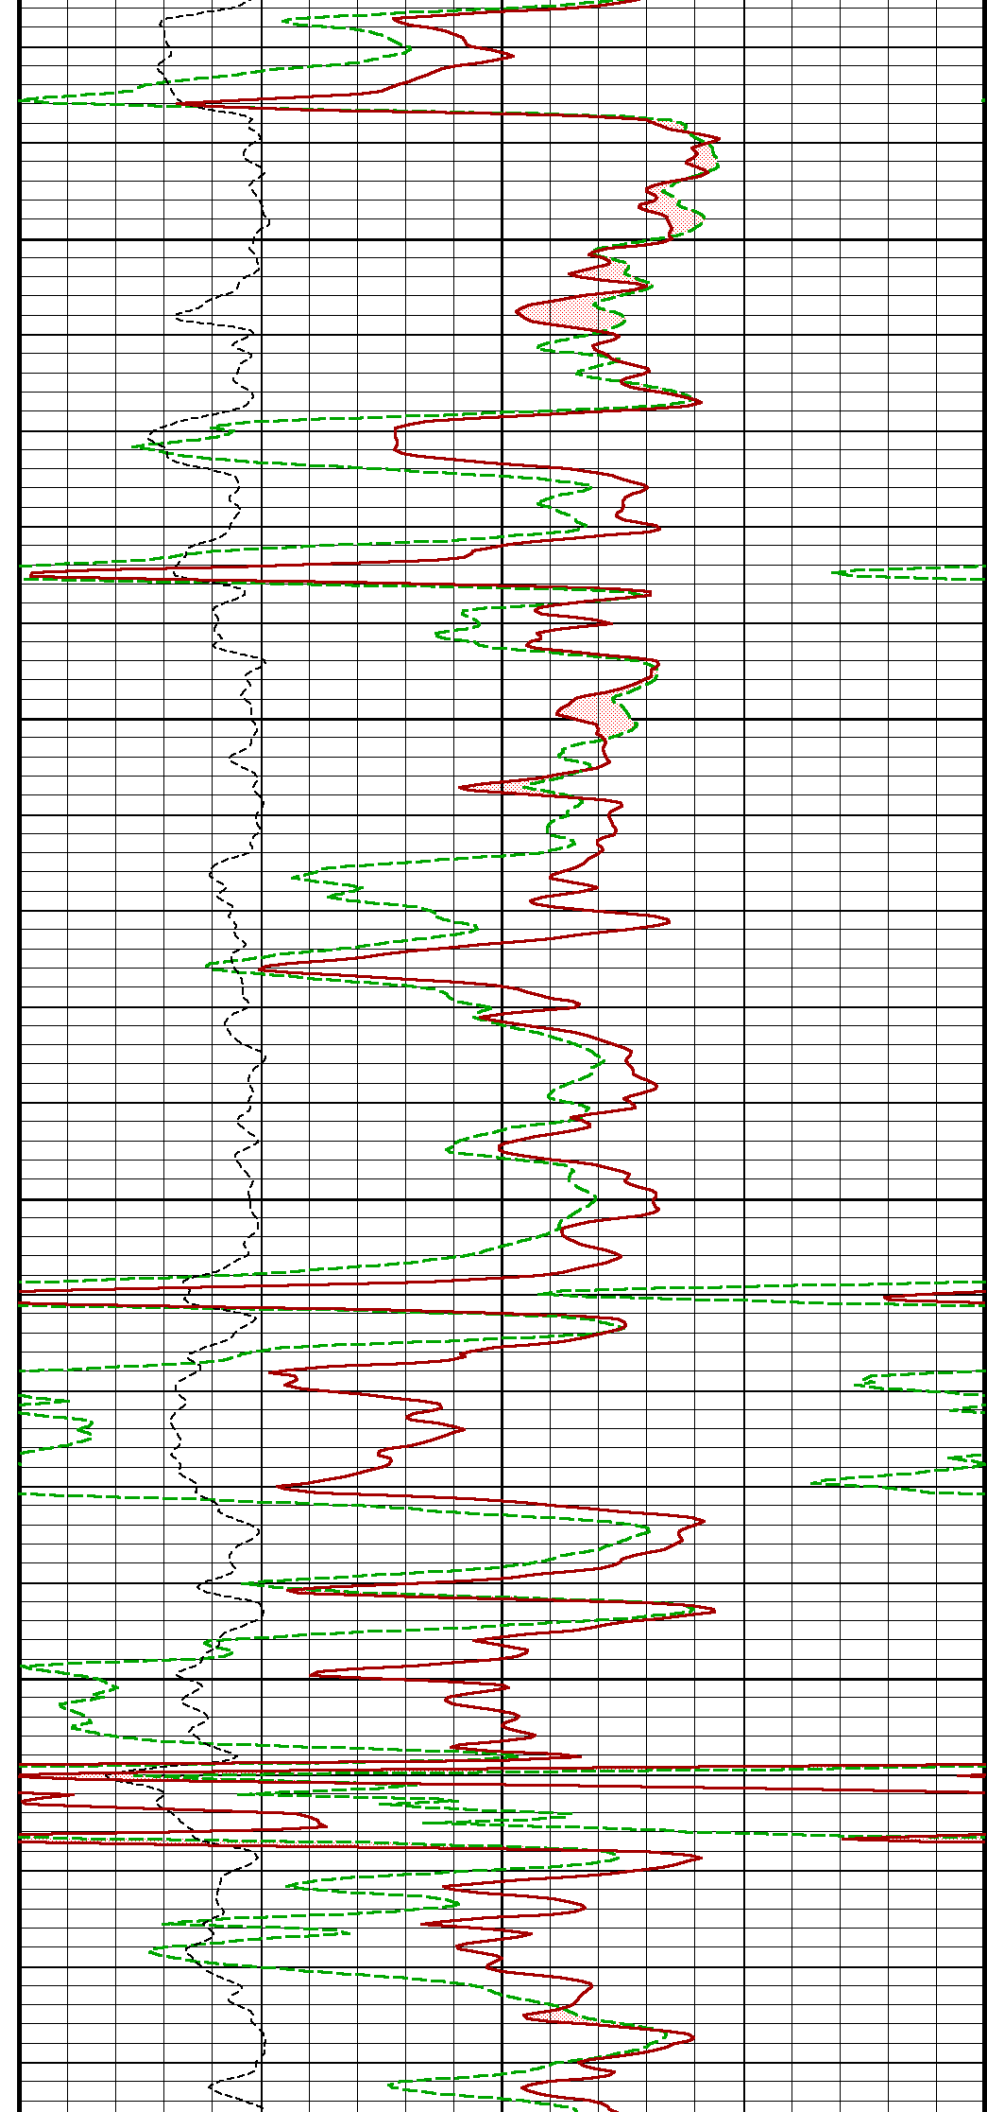

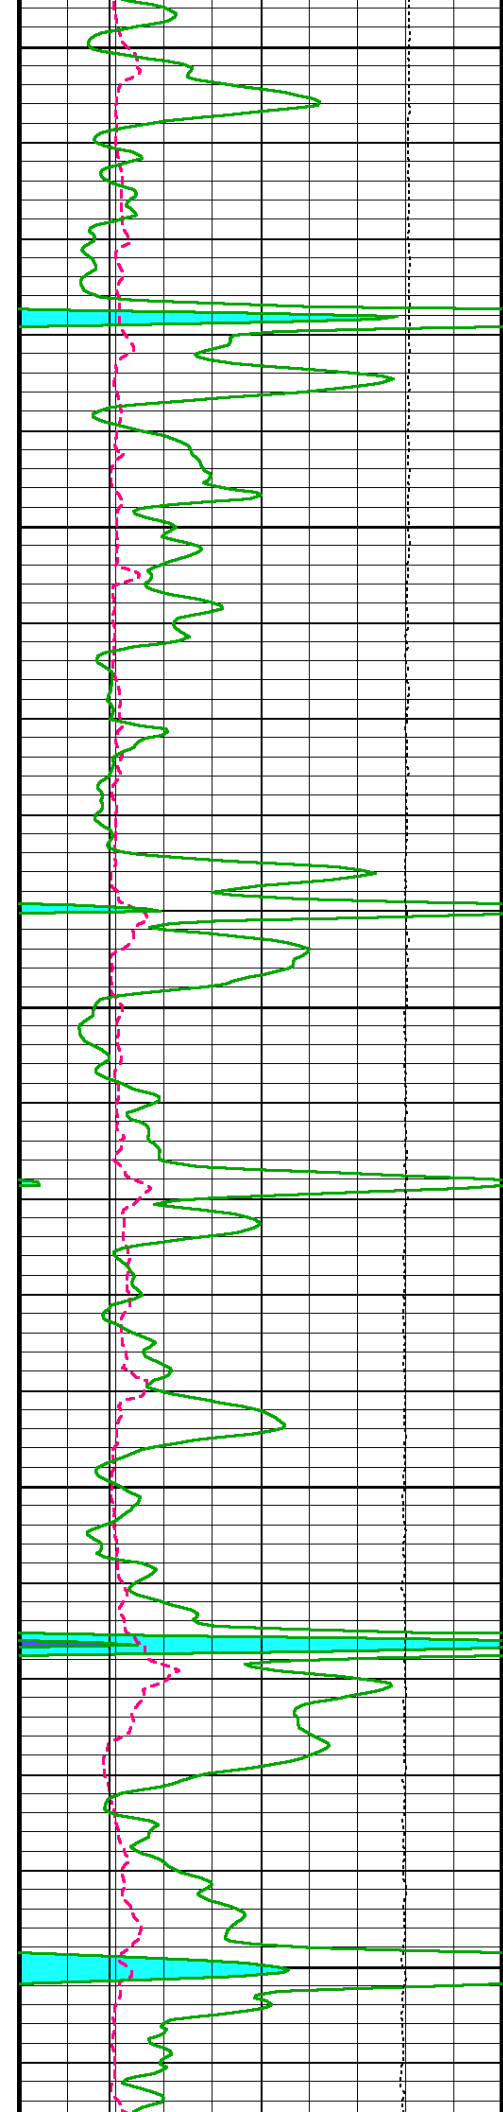


3350


3400


3450


3500



3550

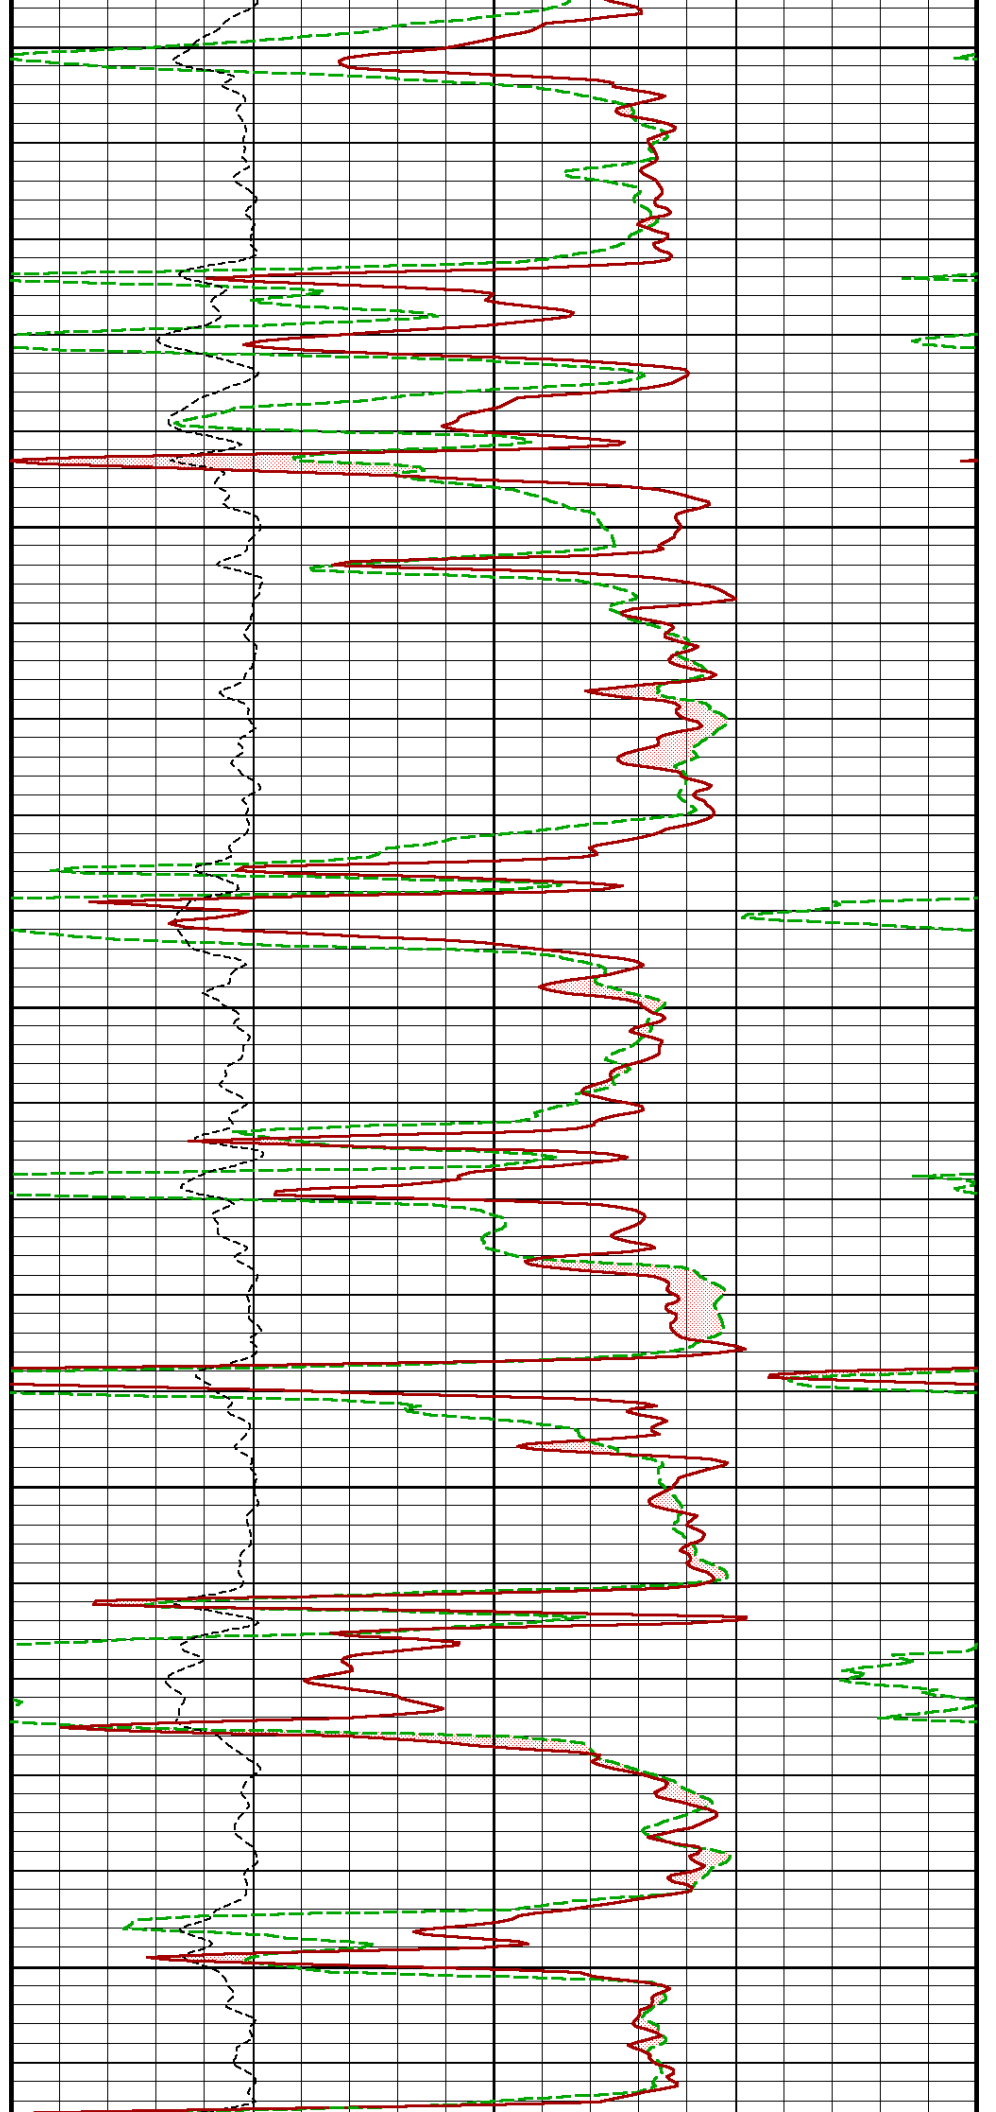



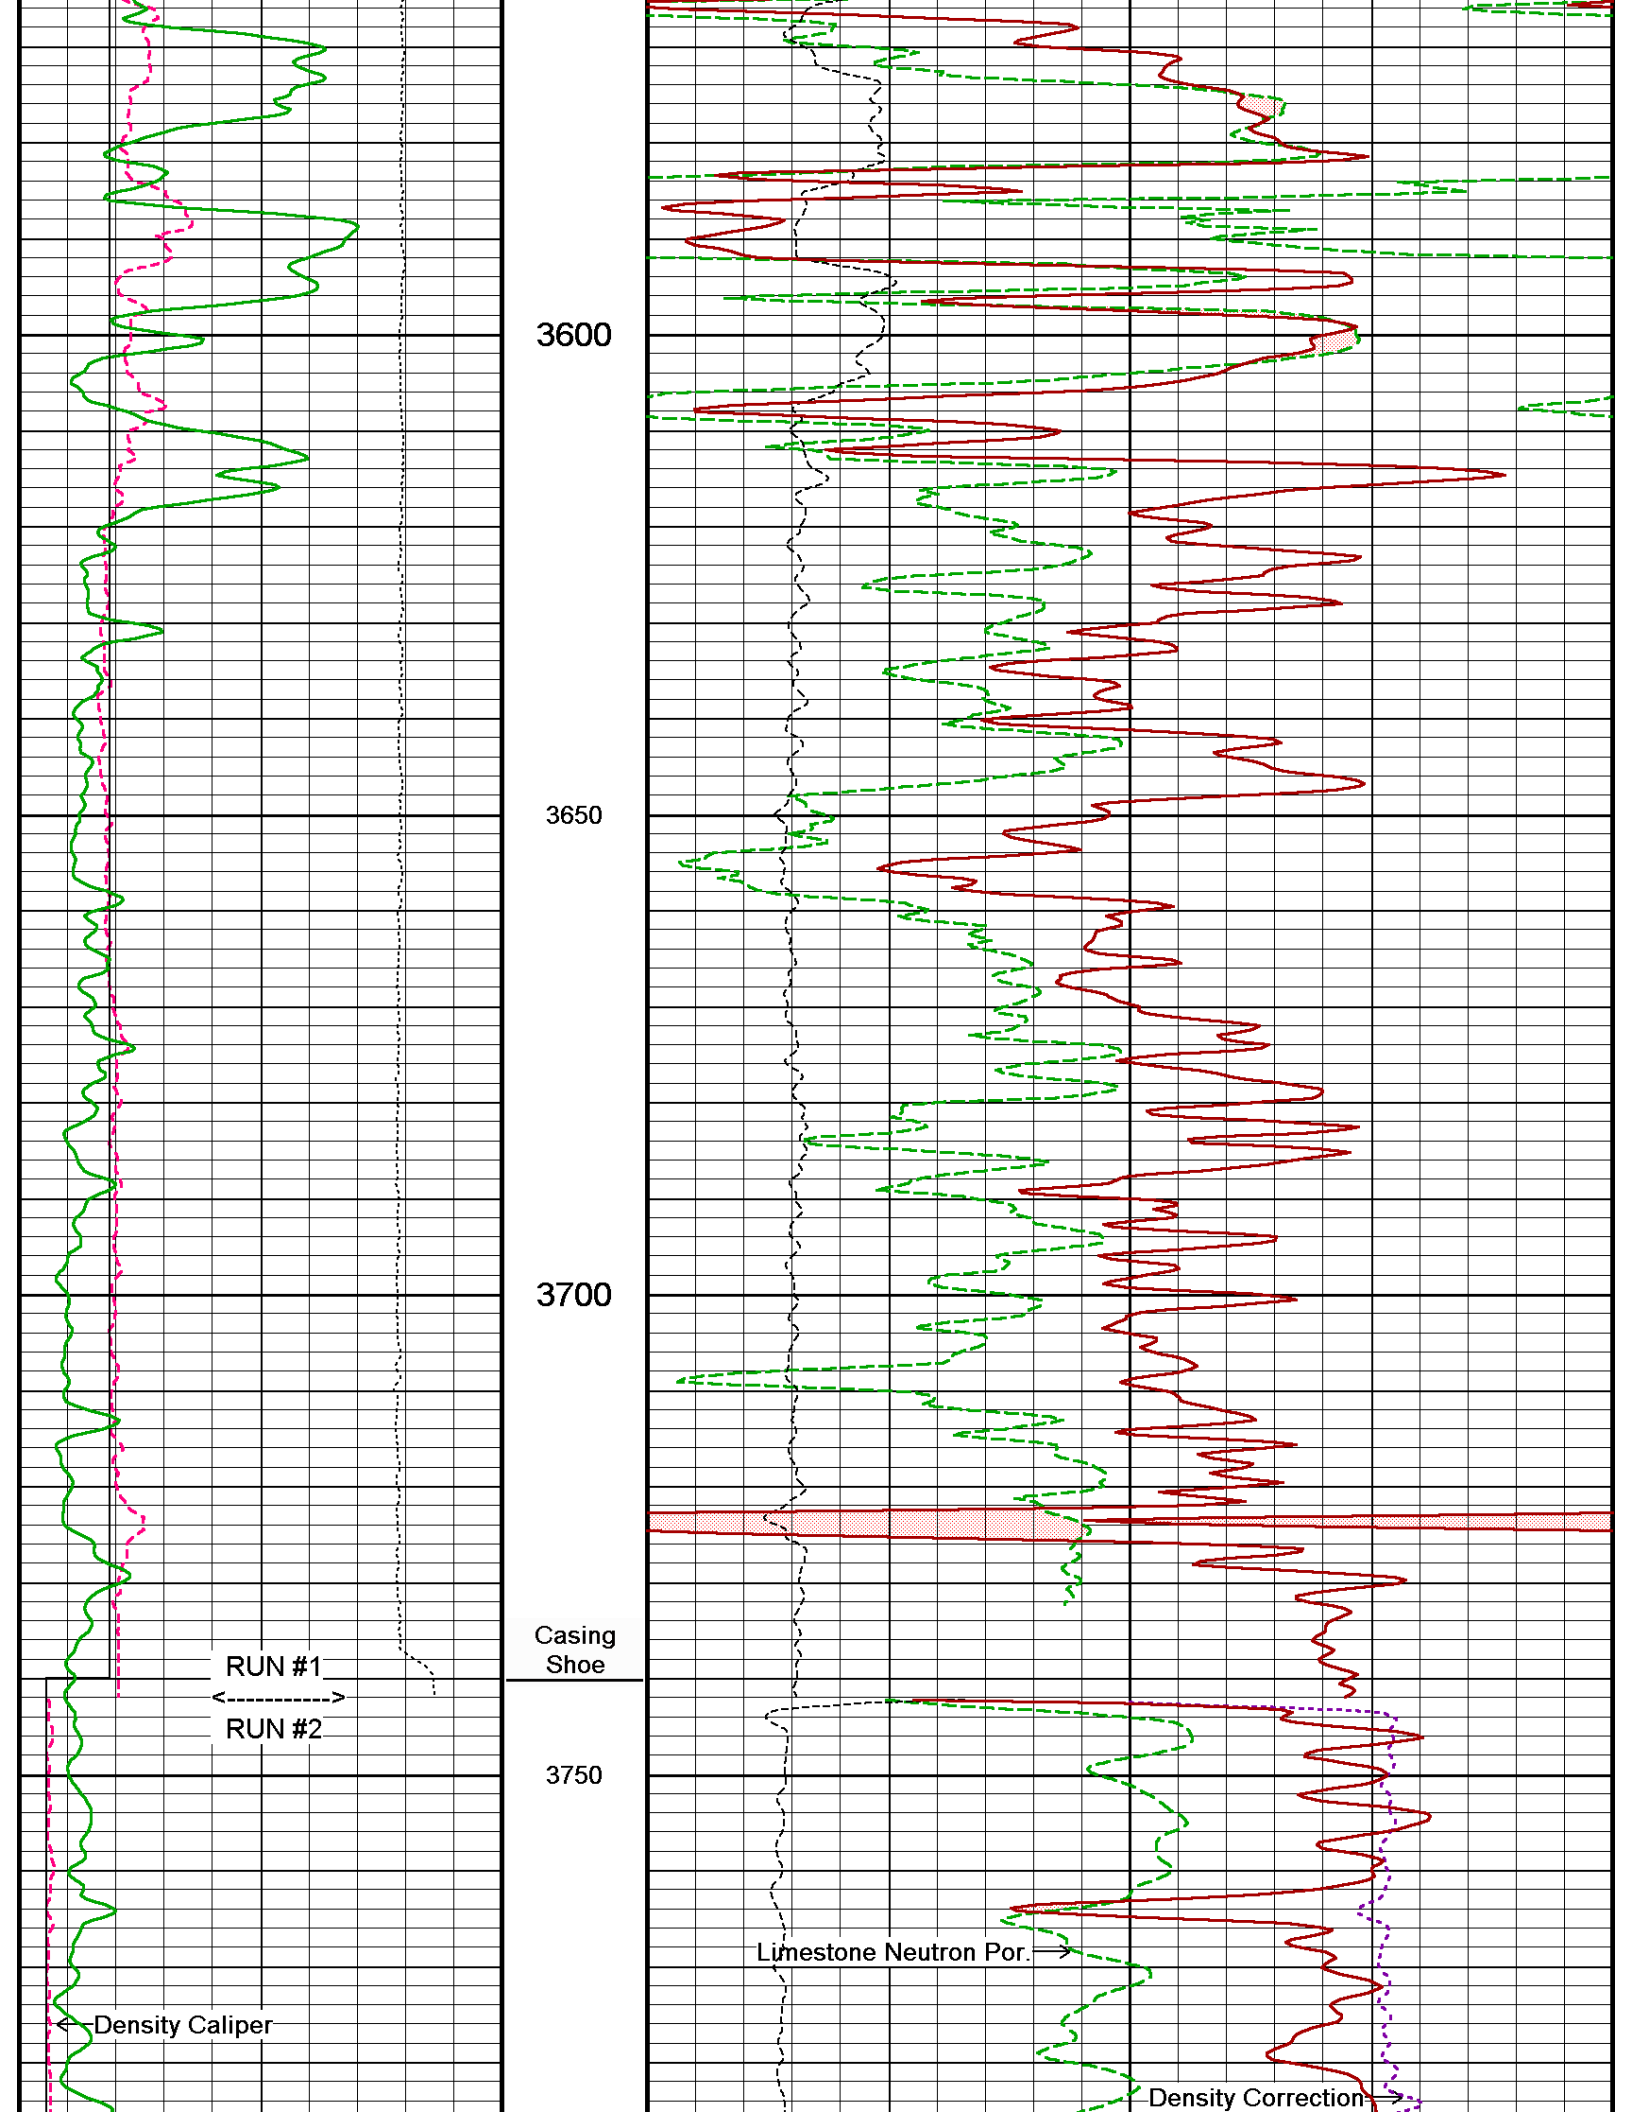


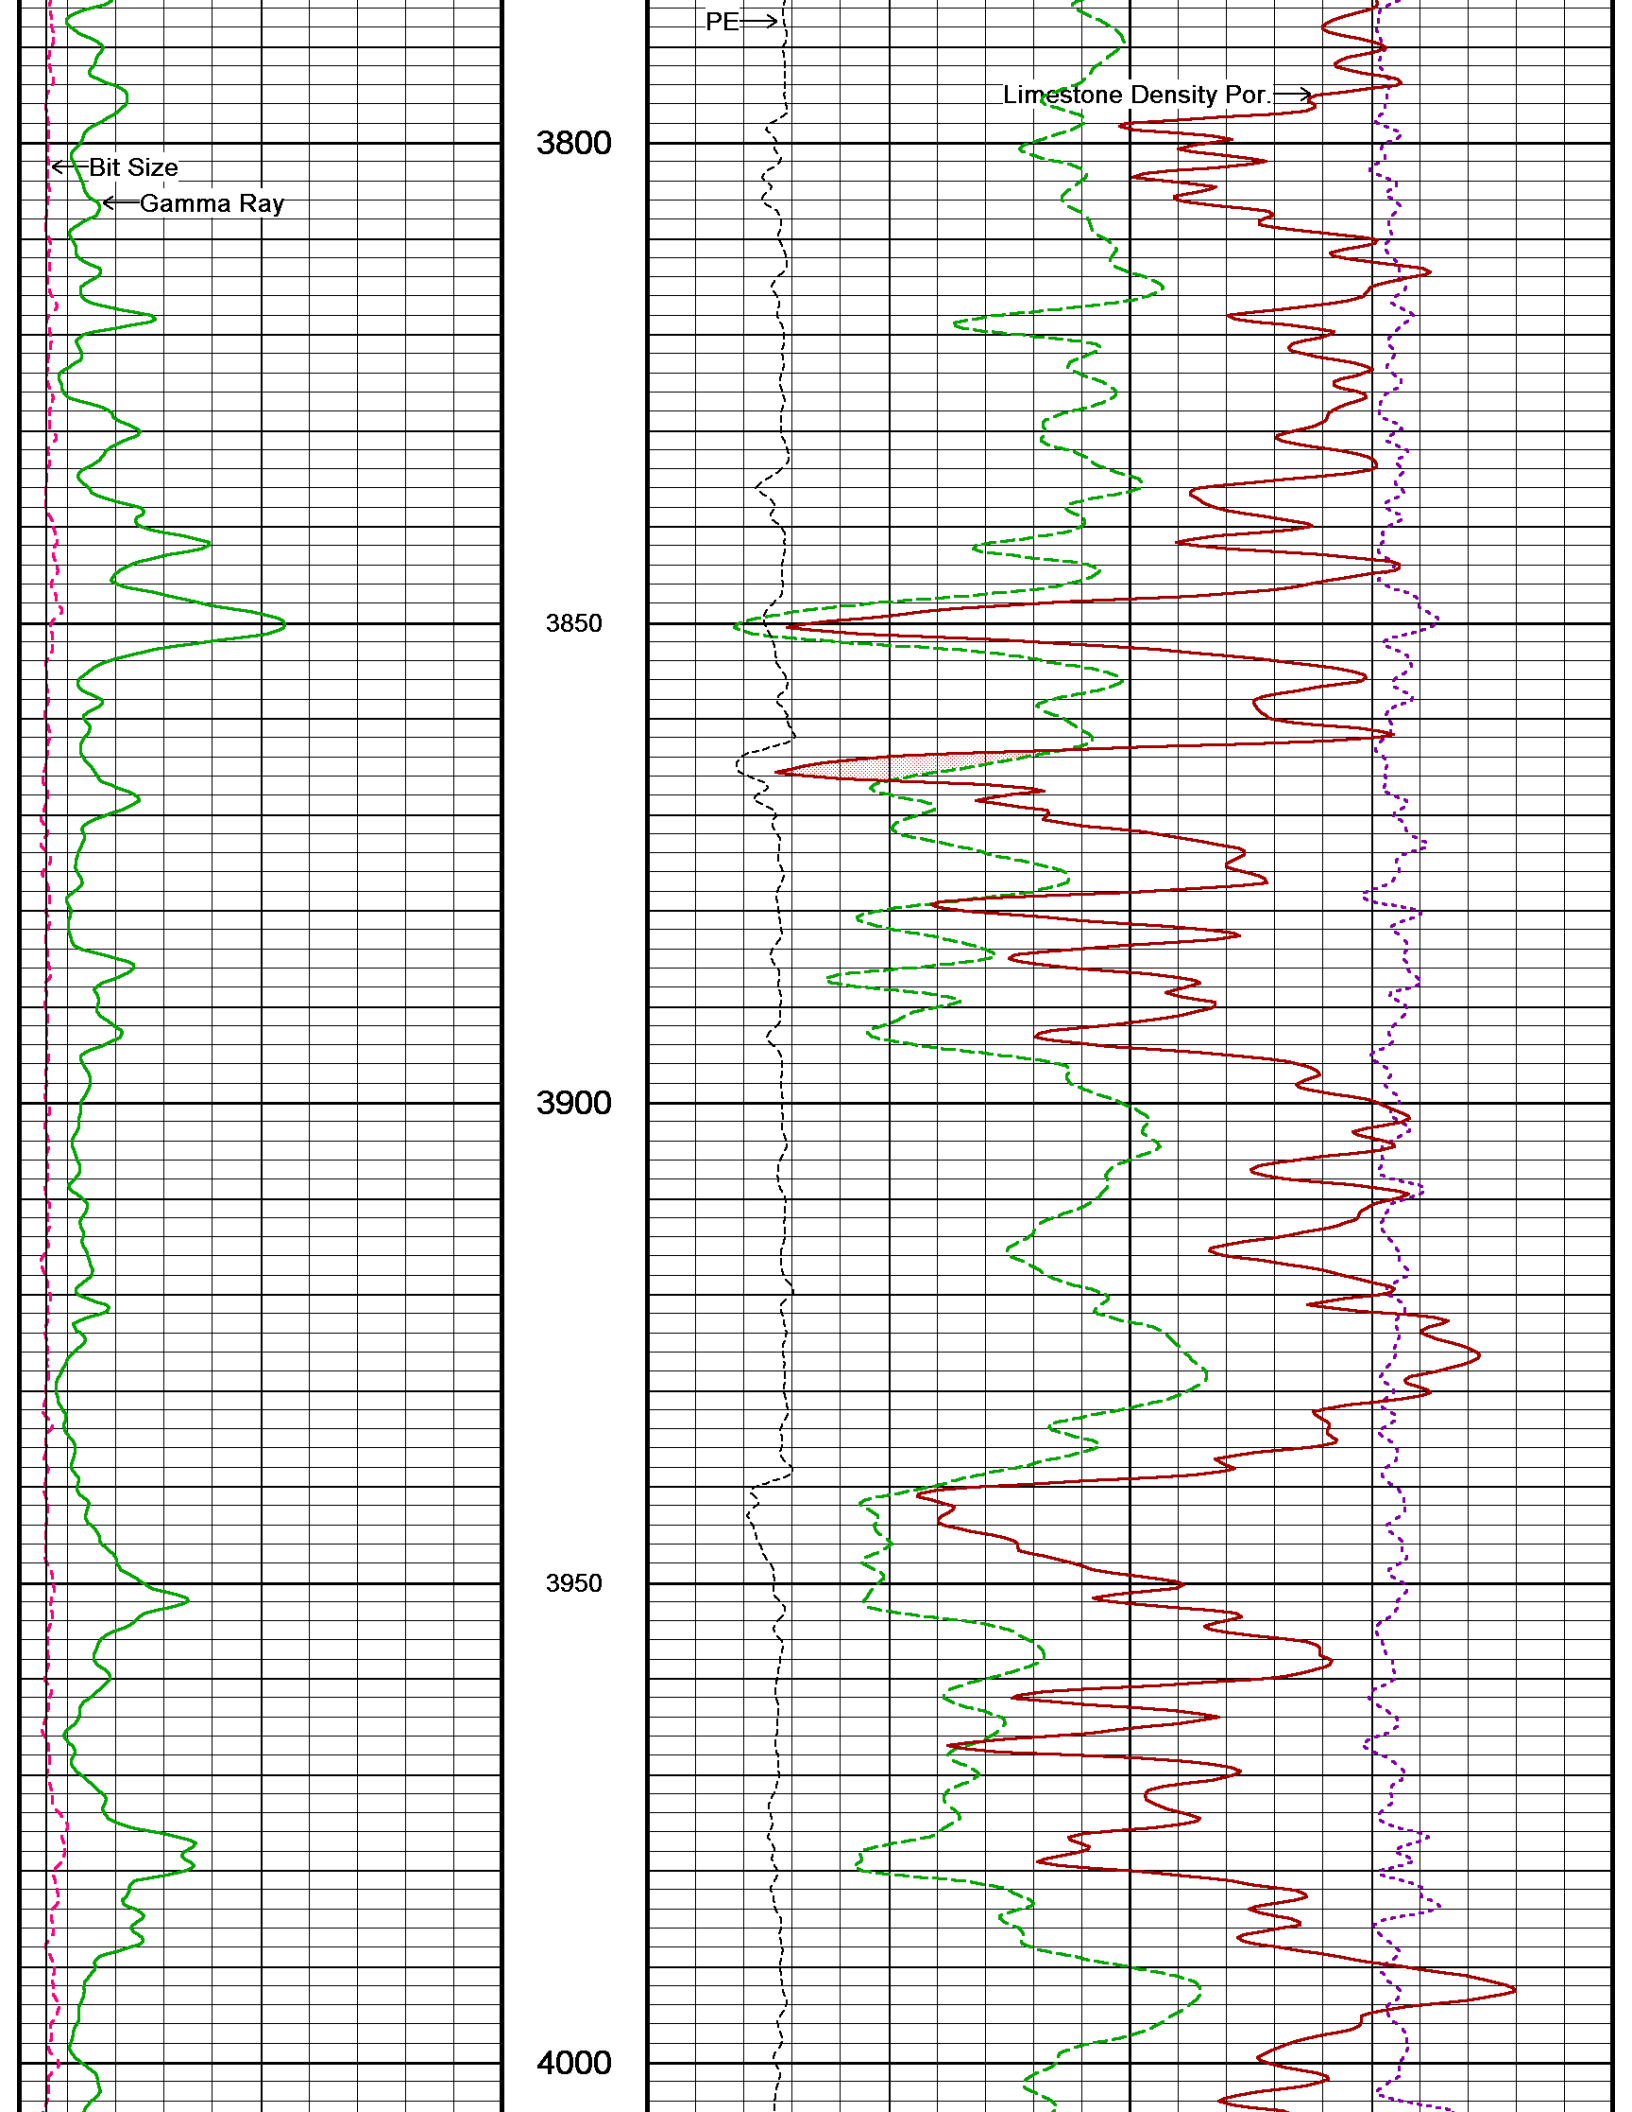



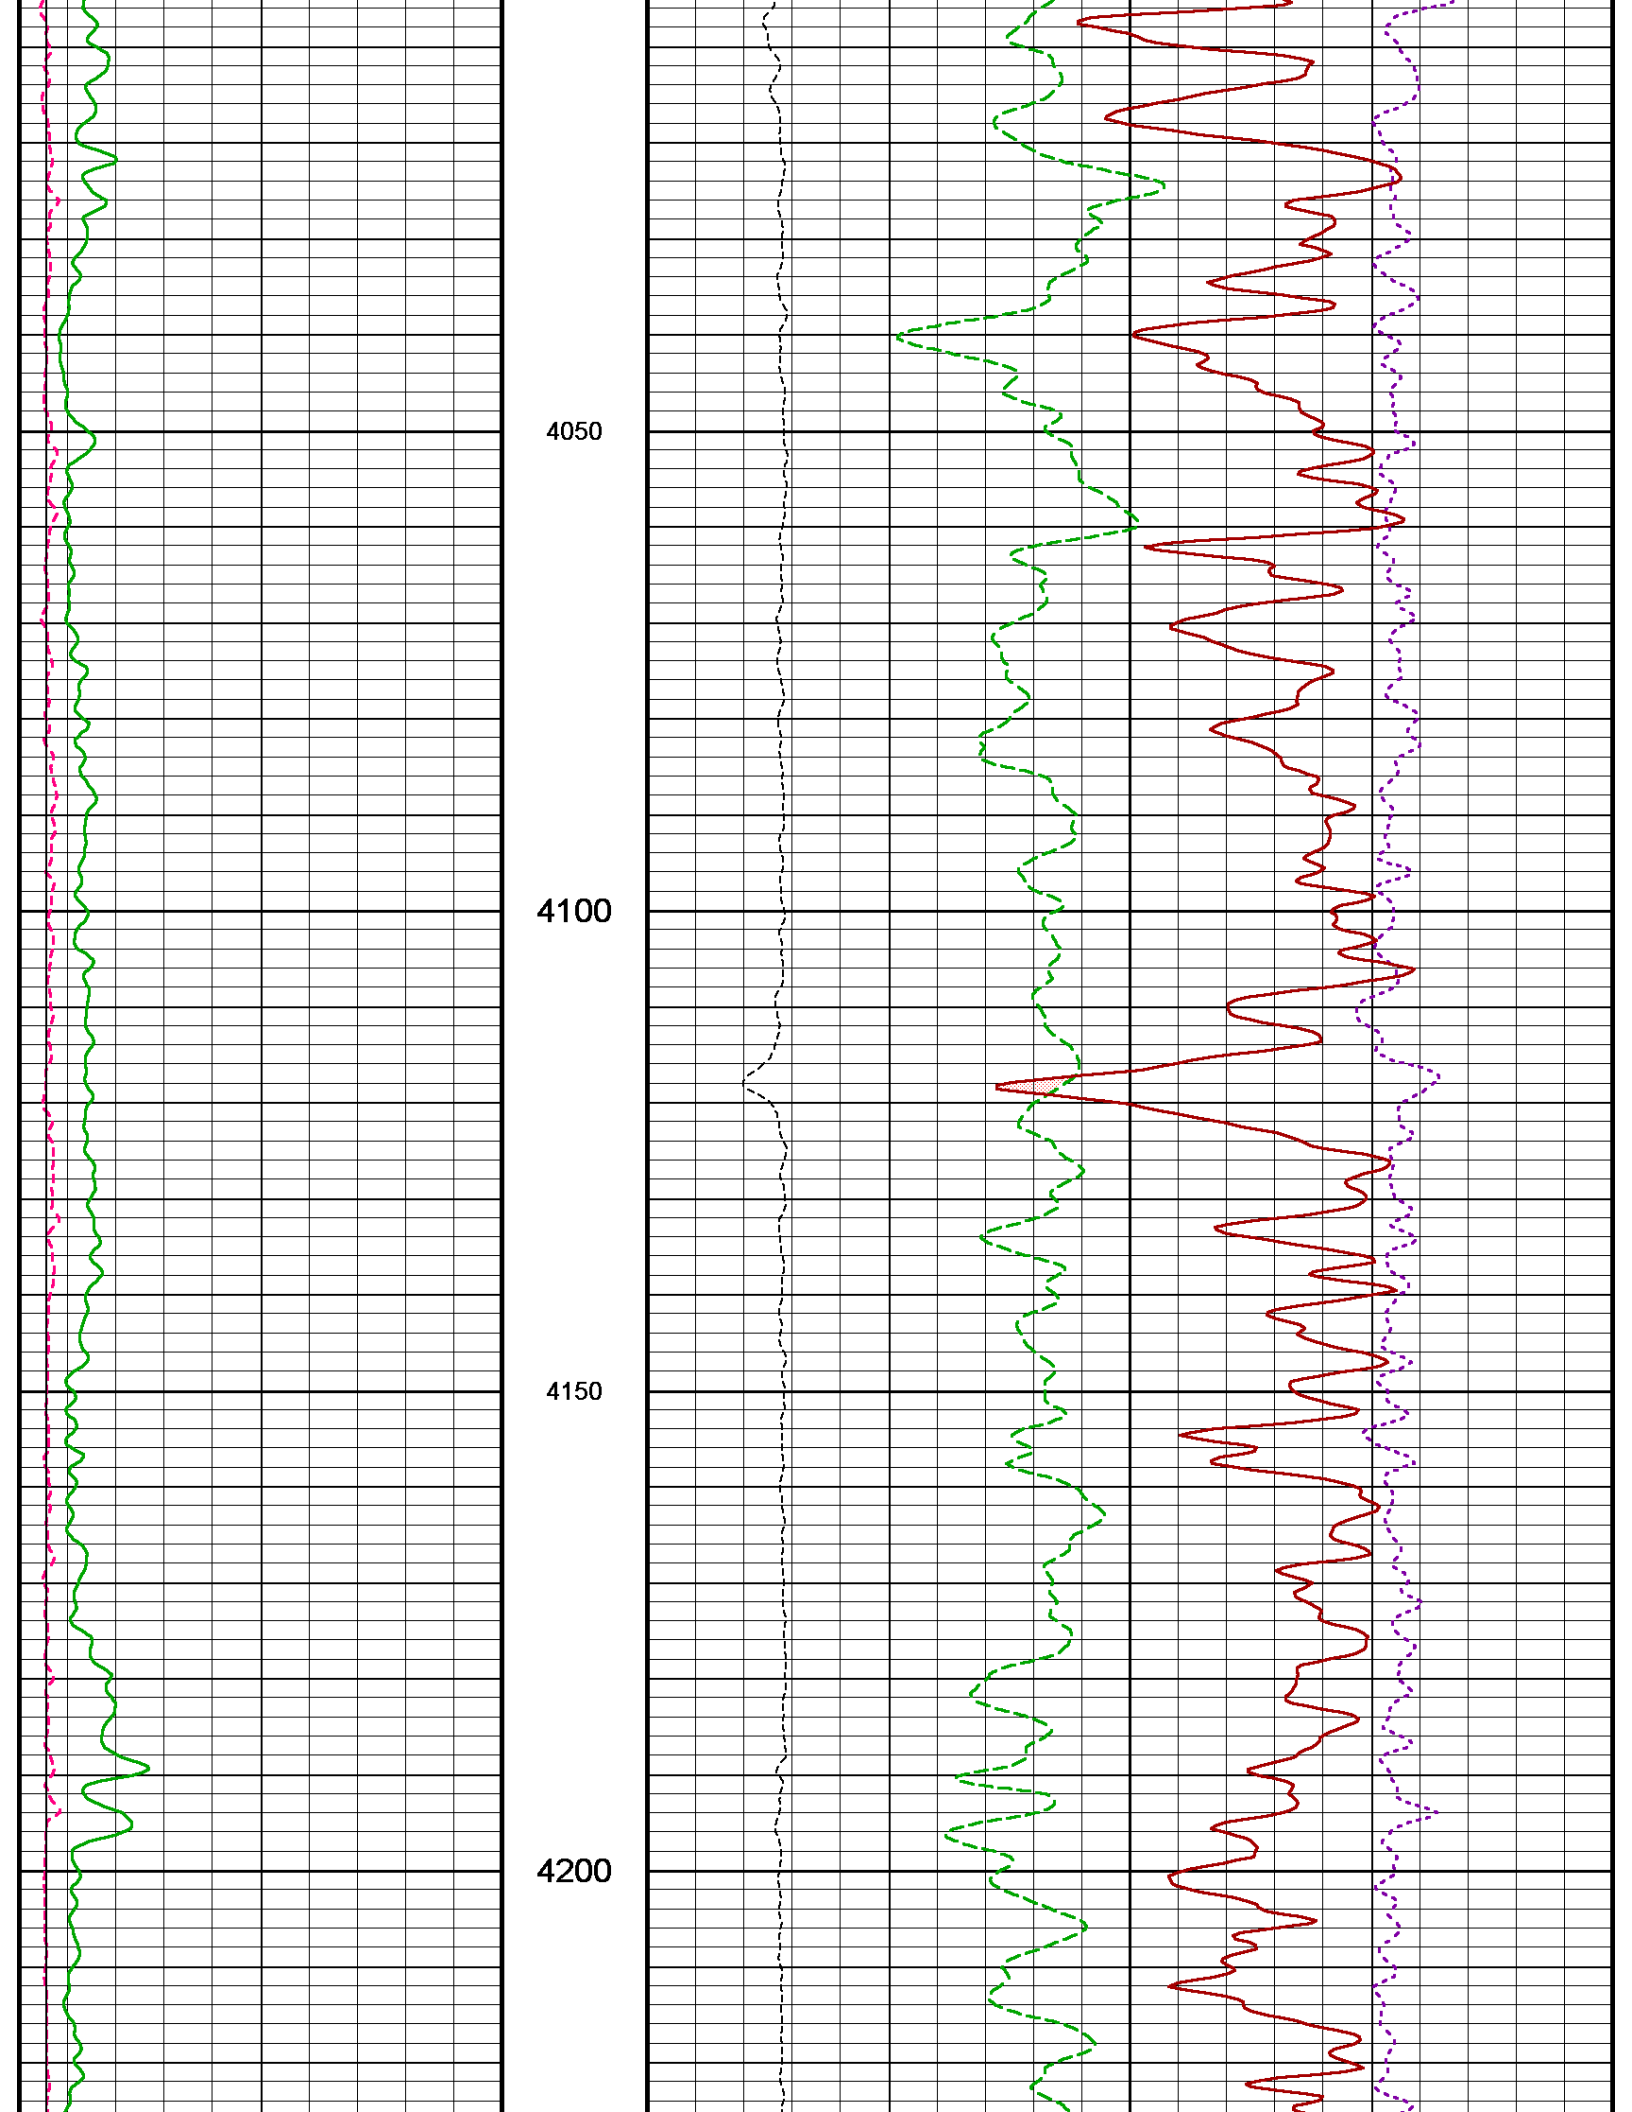


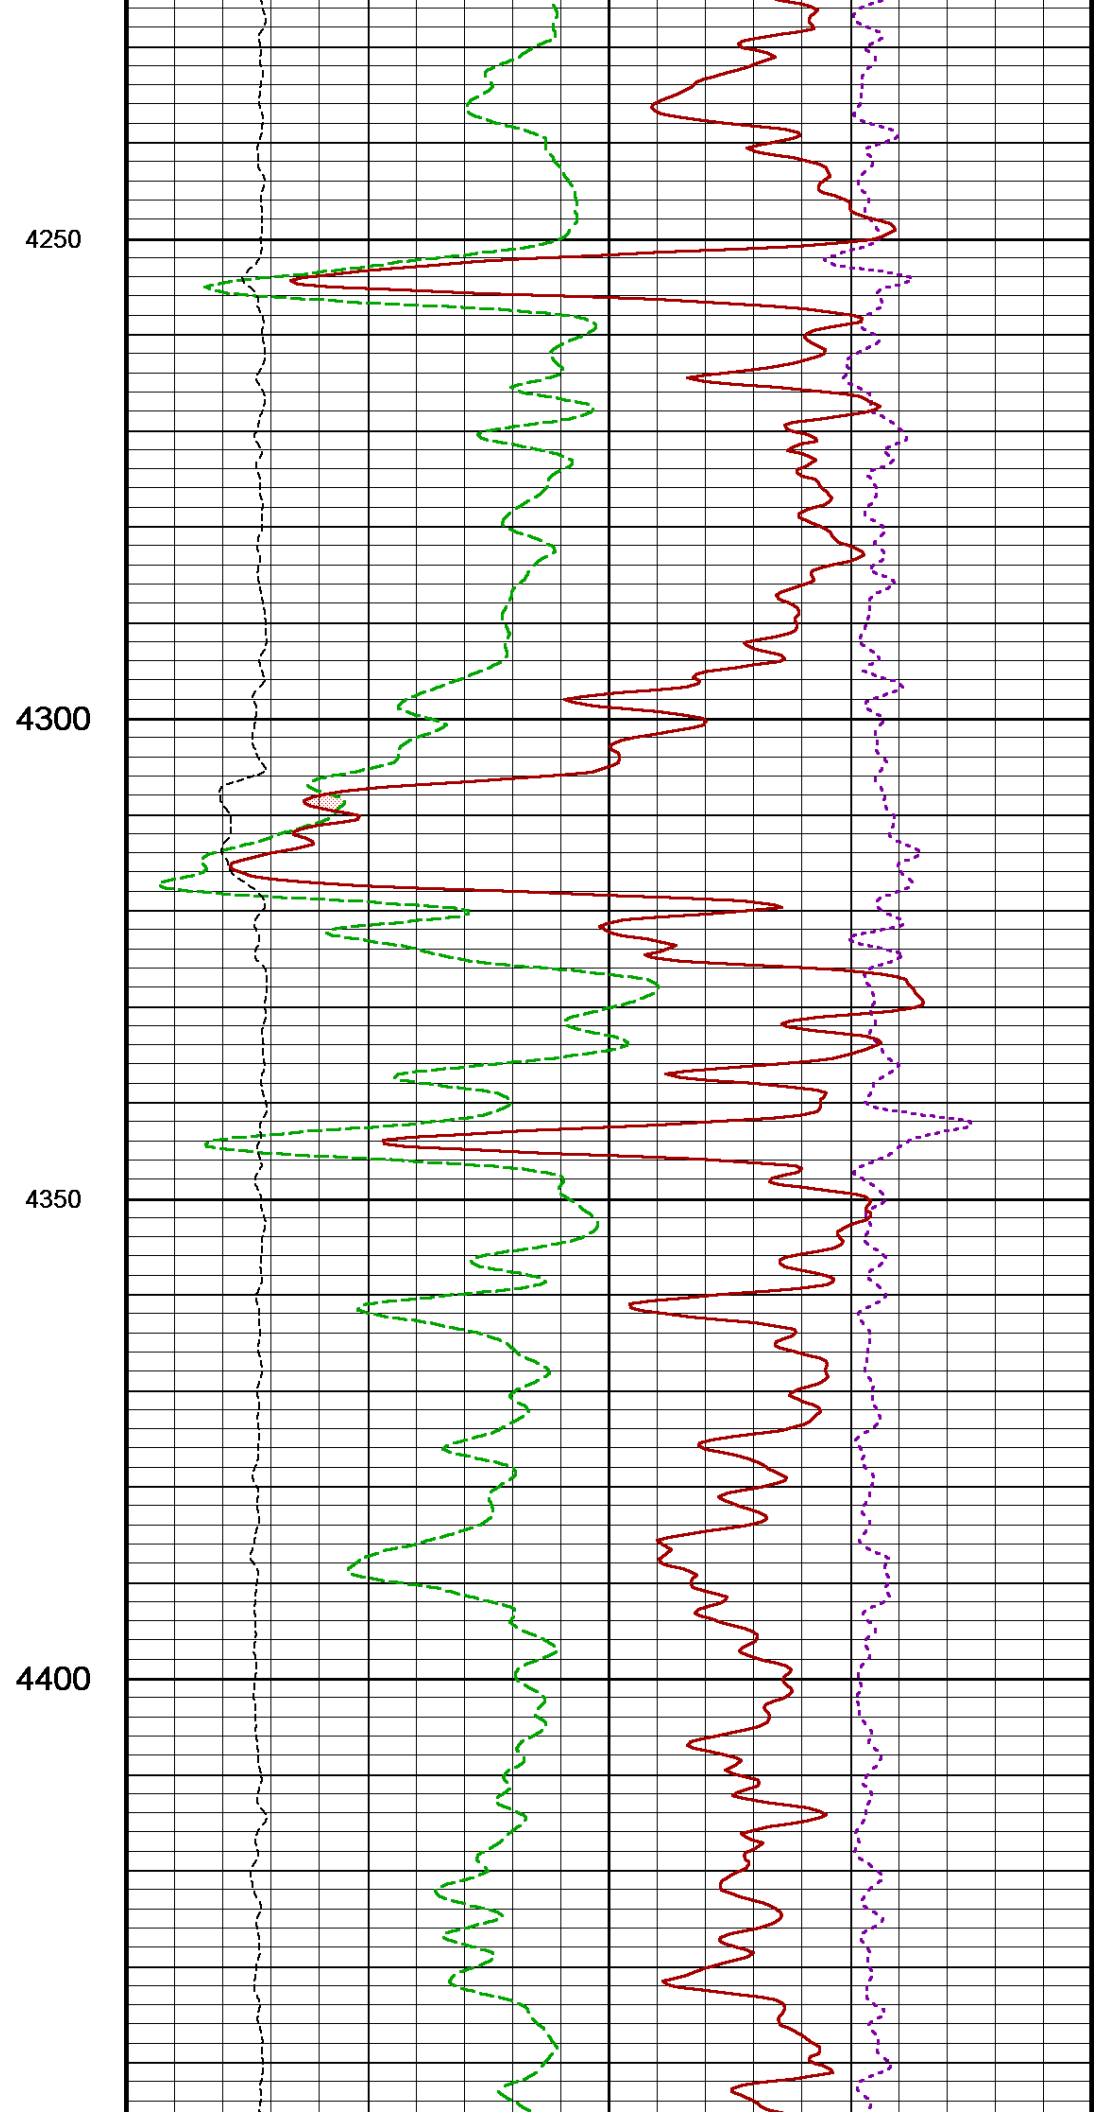
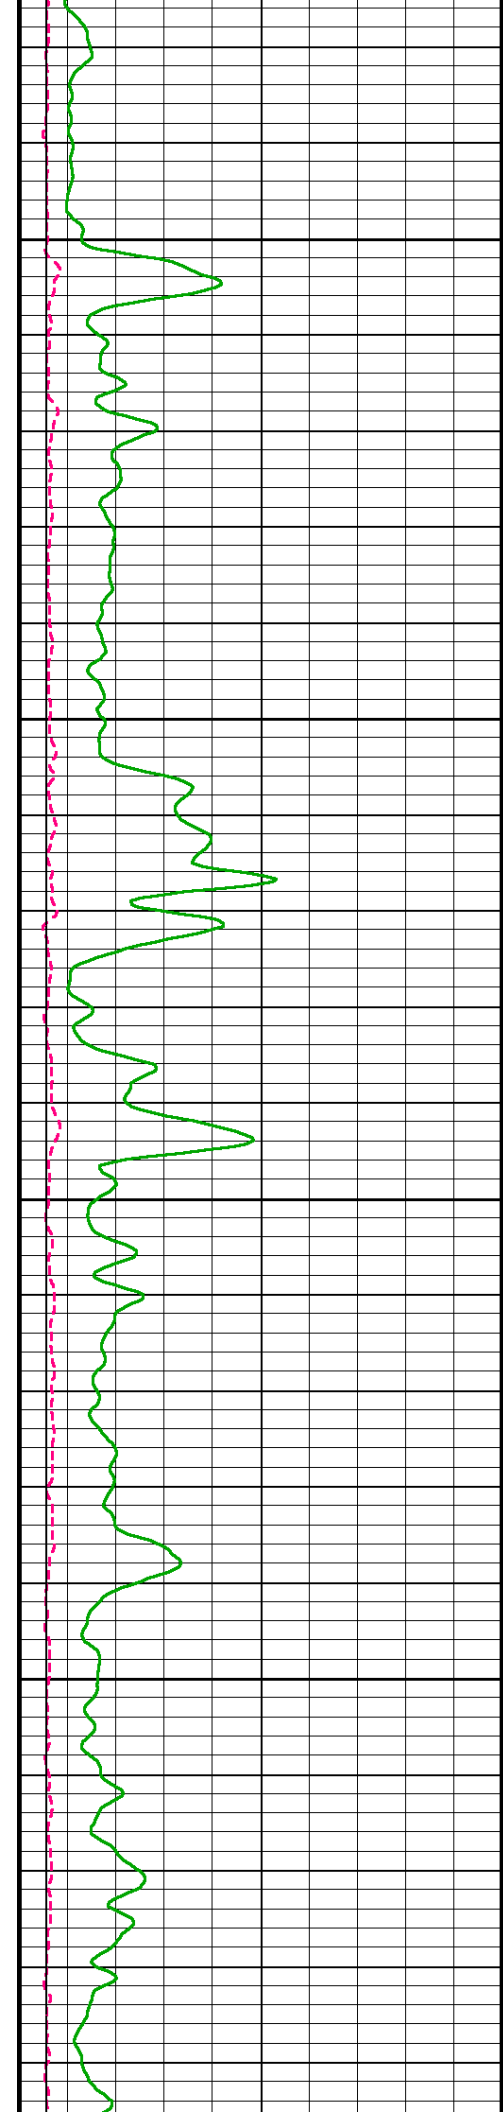


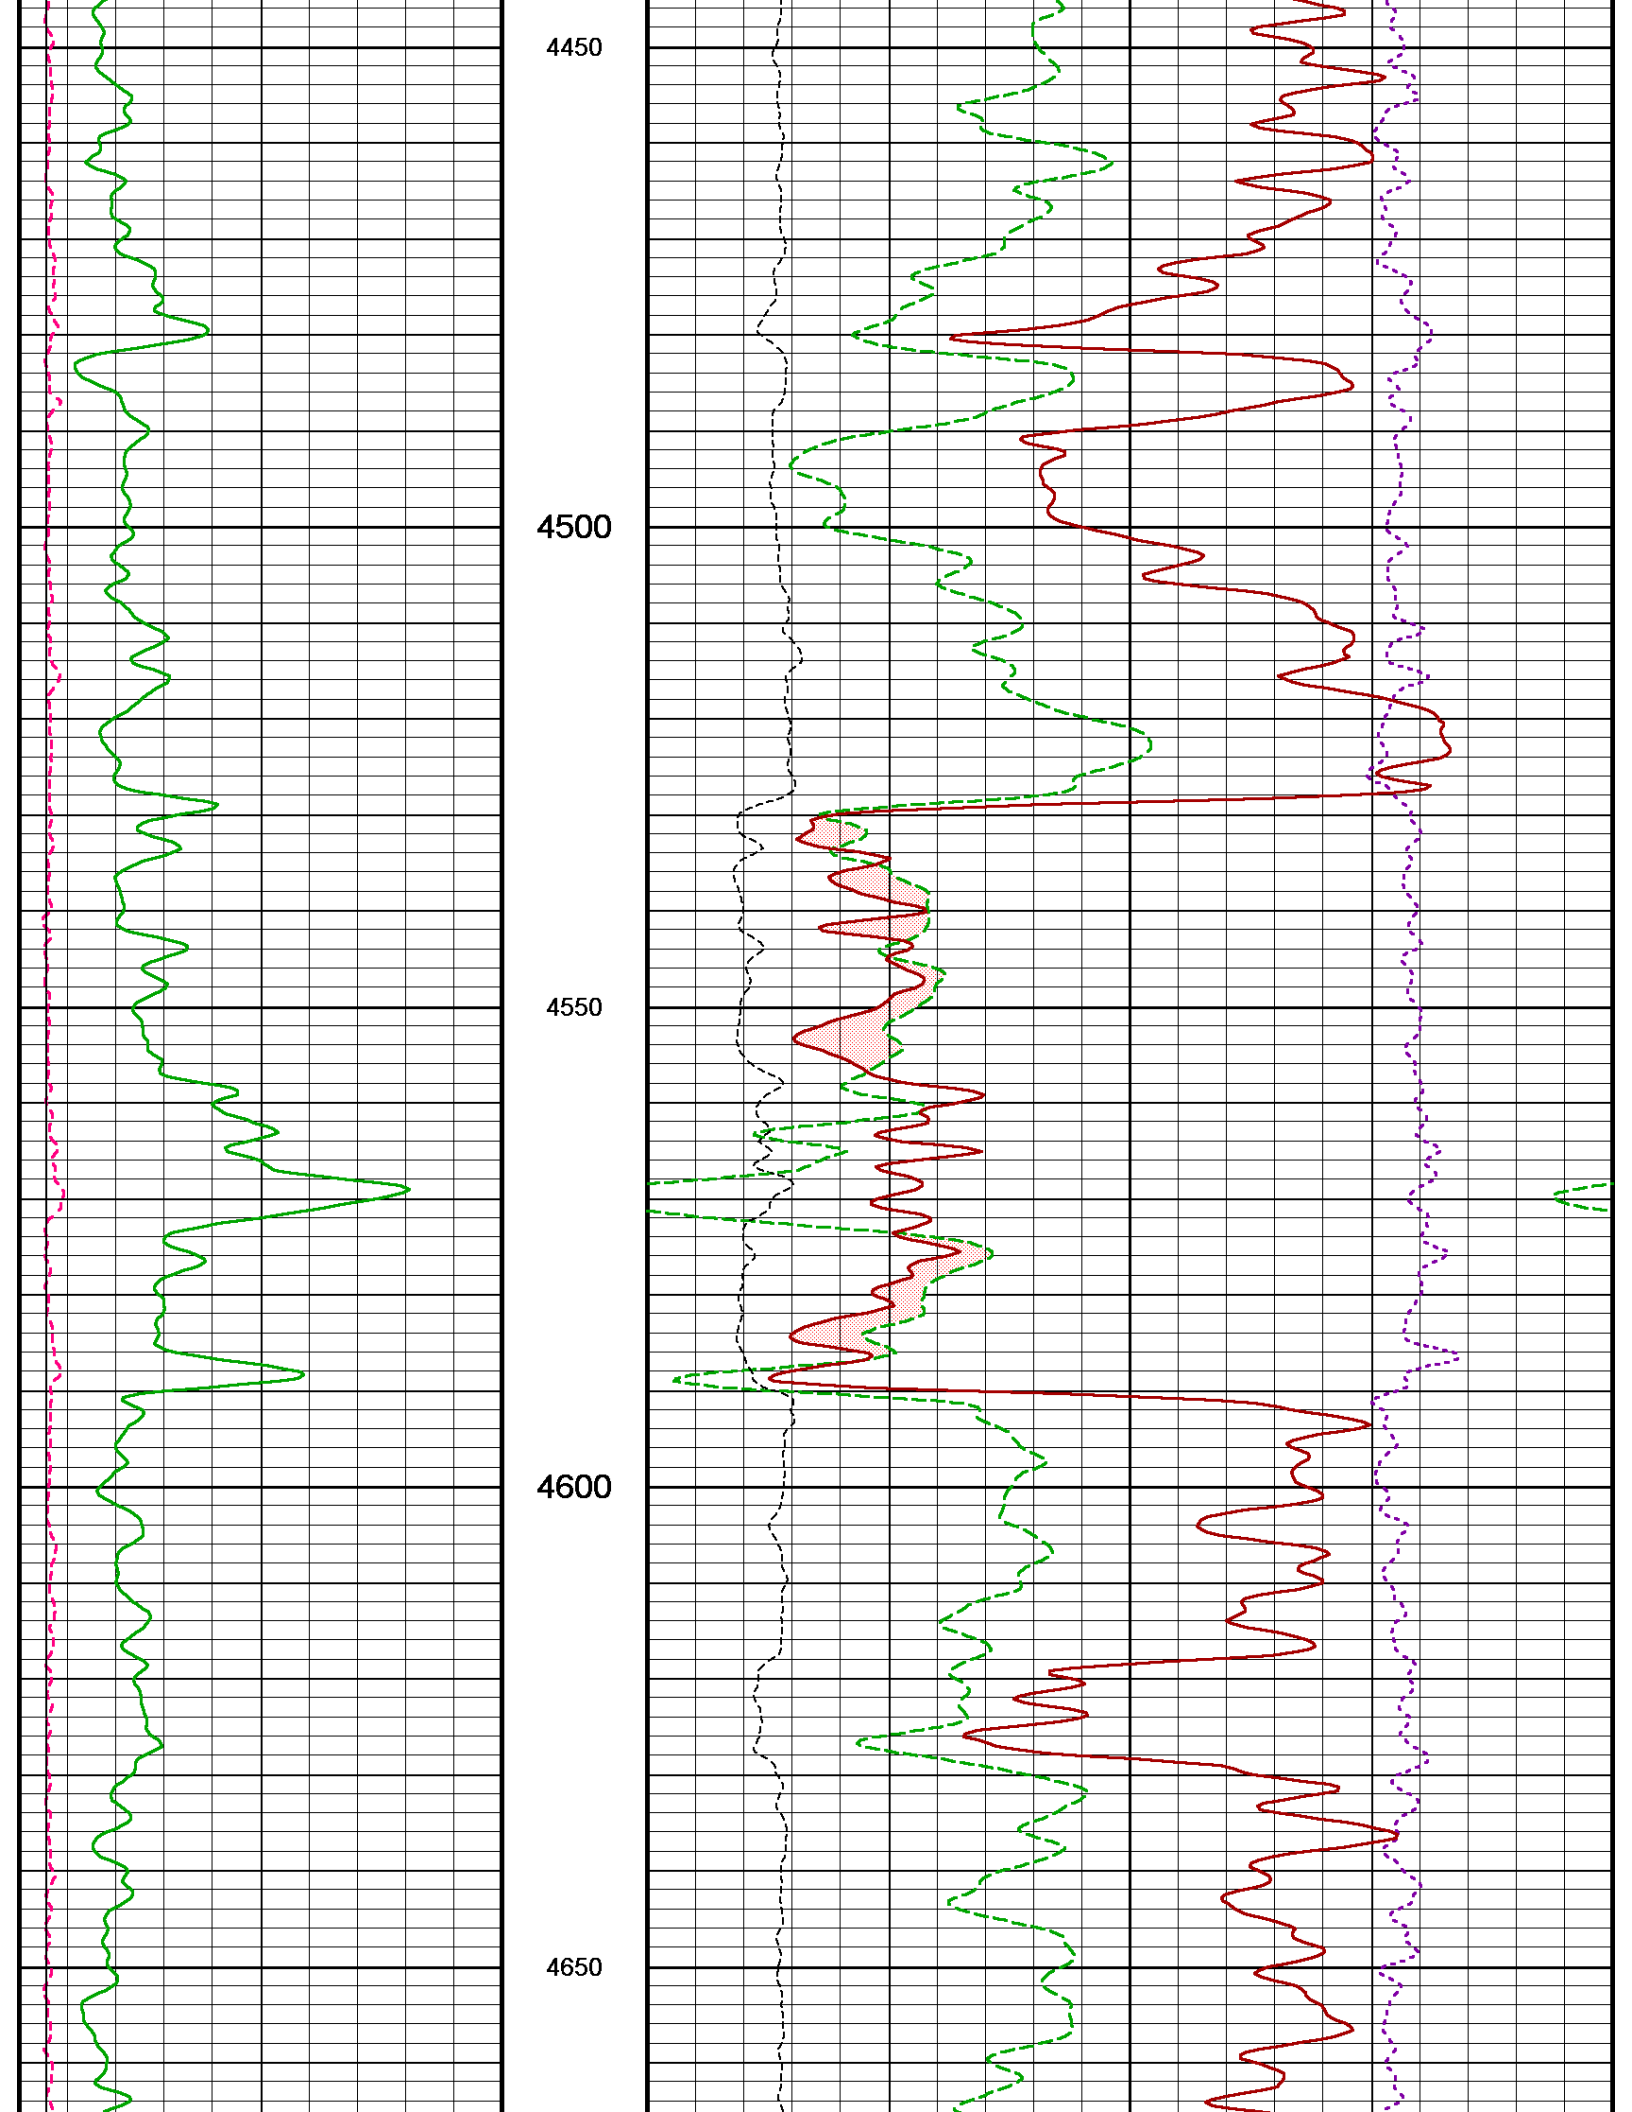


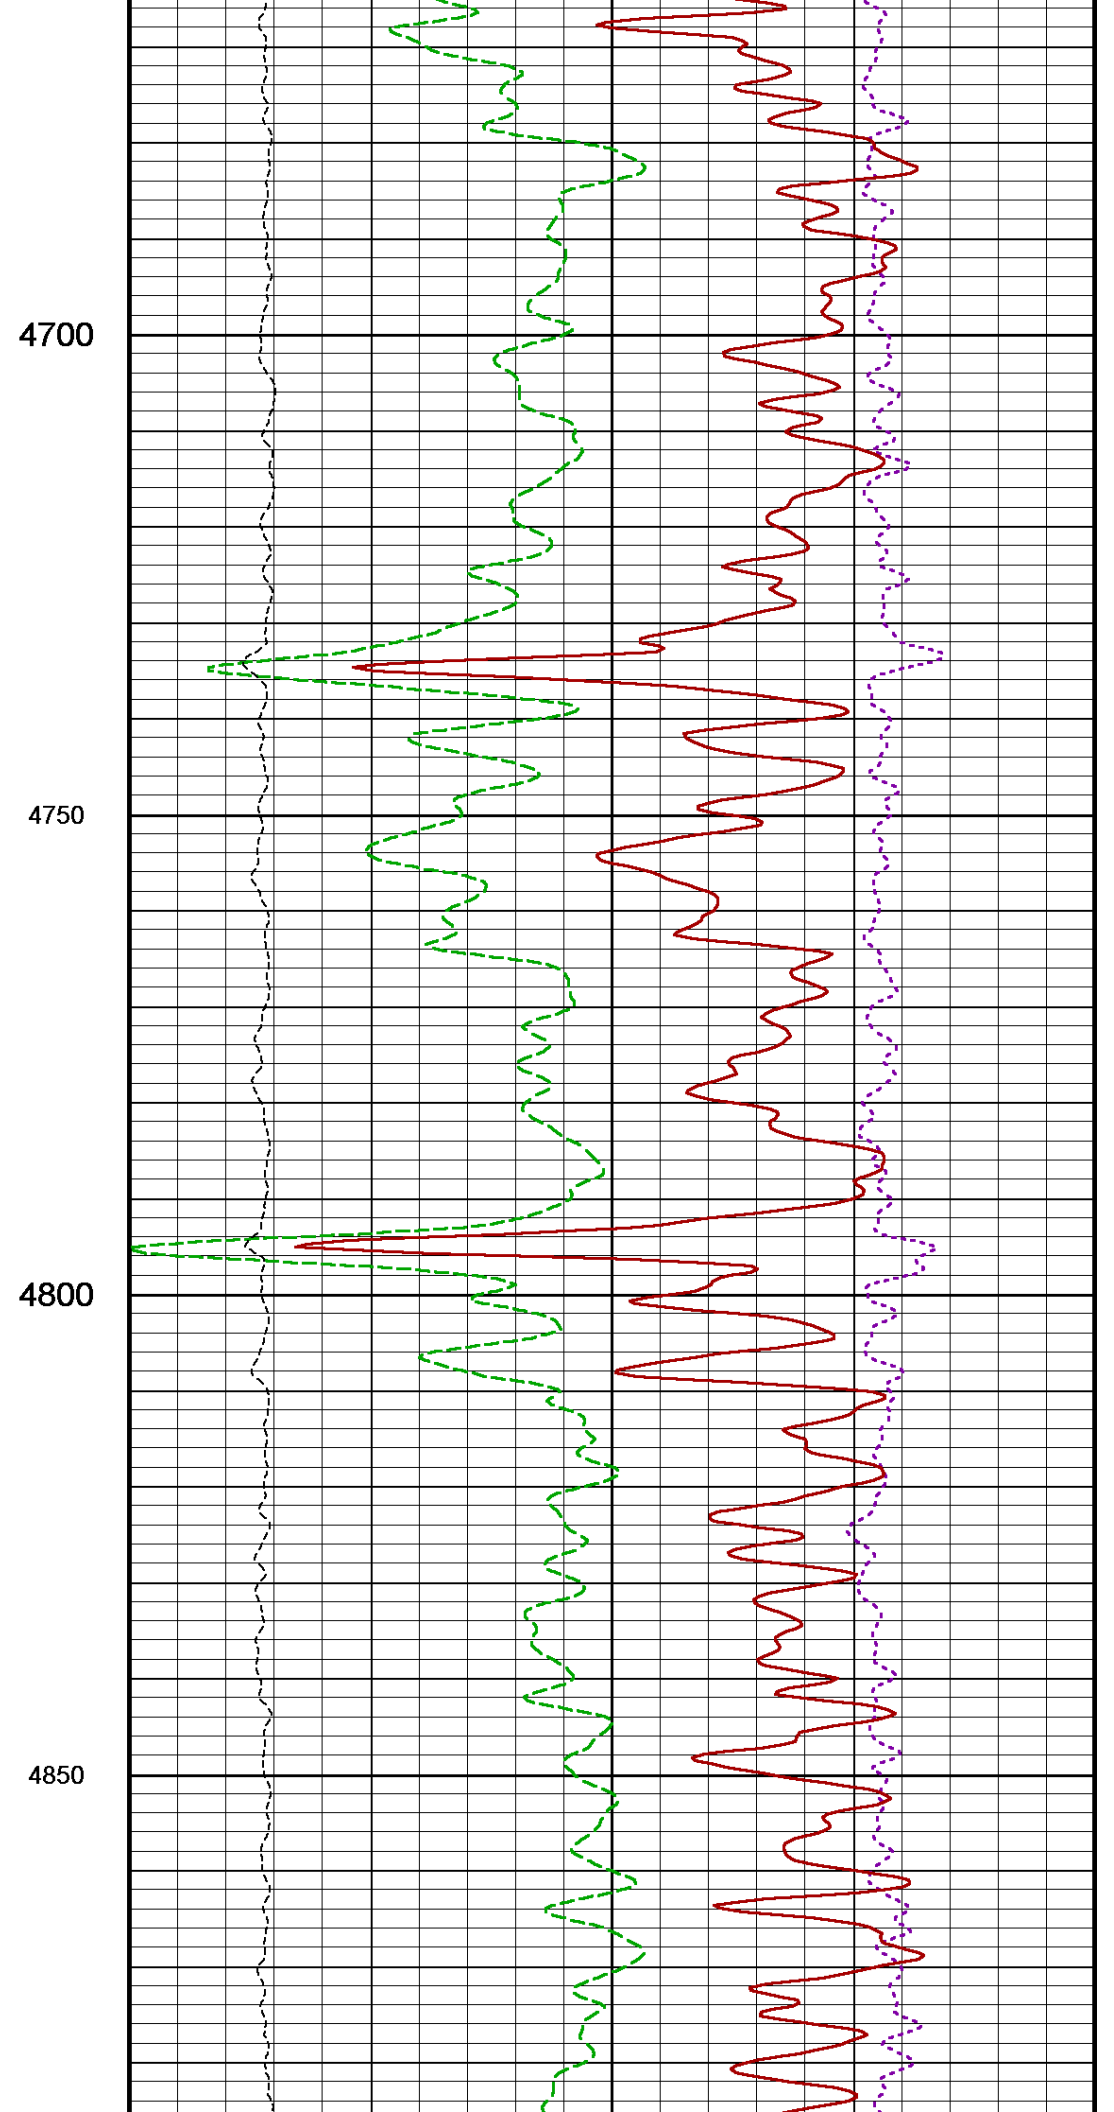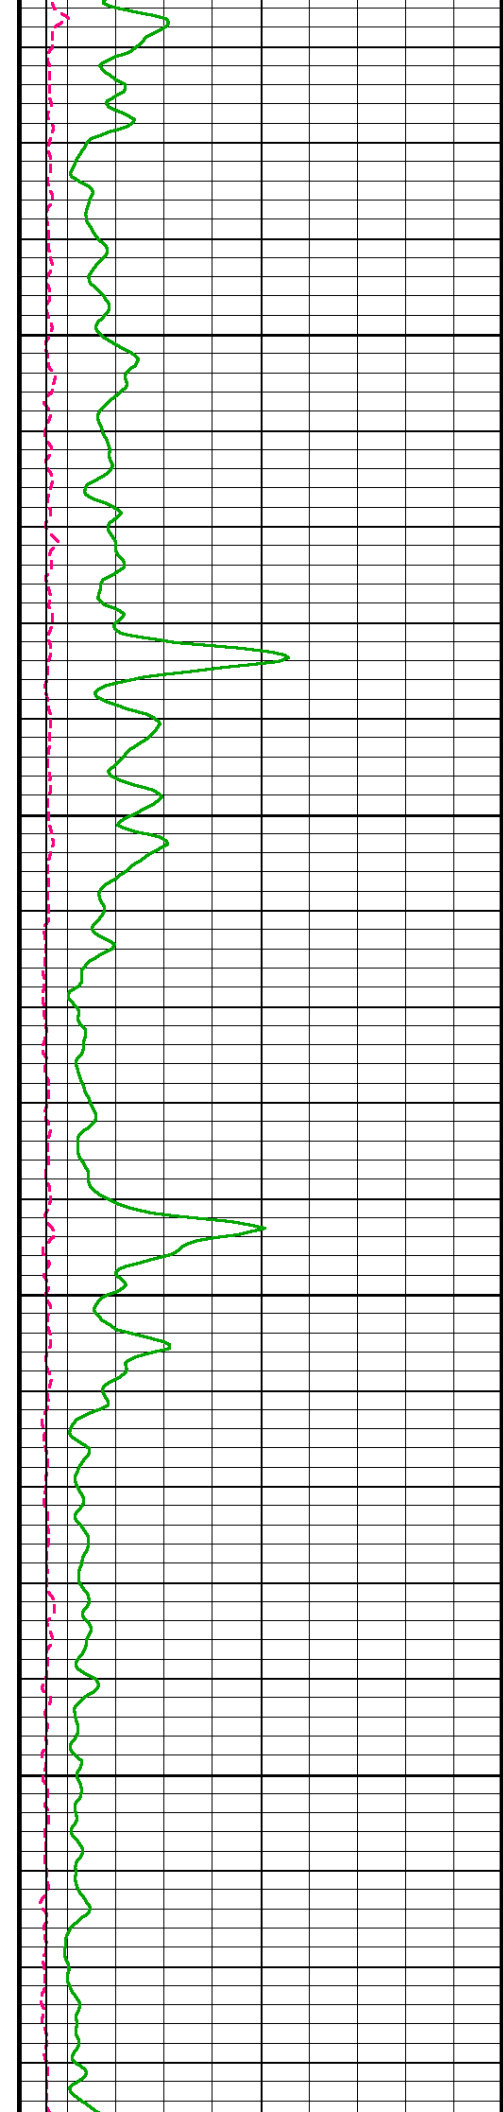

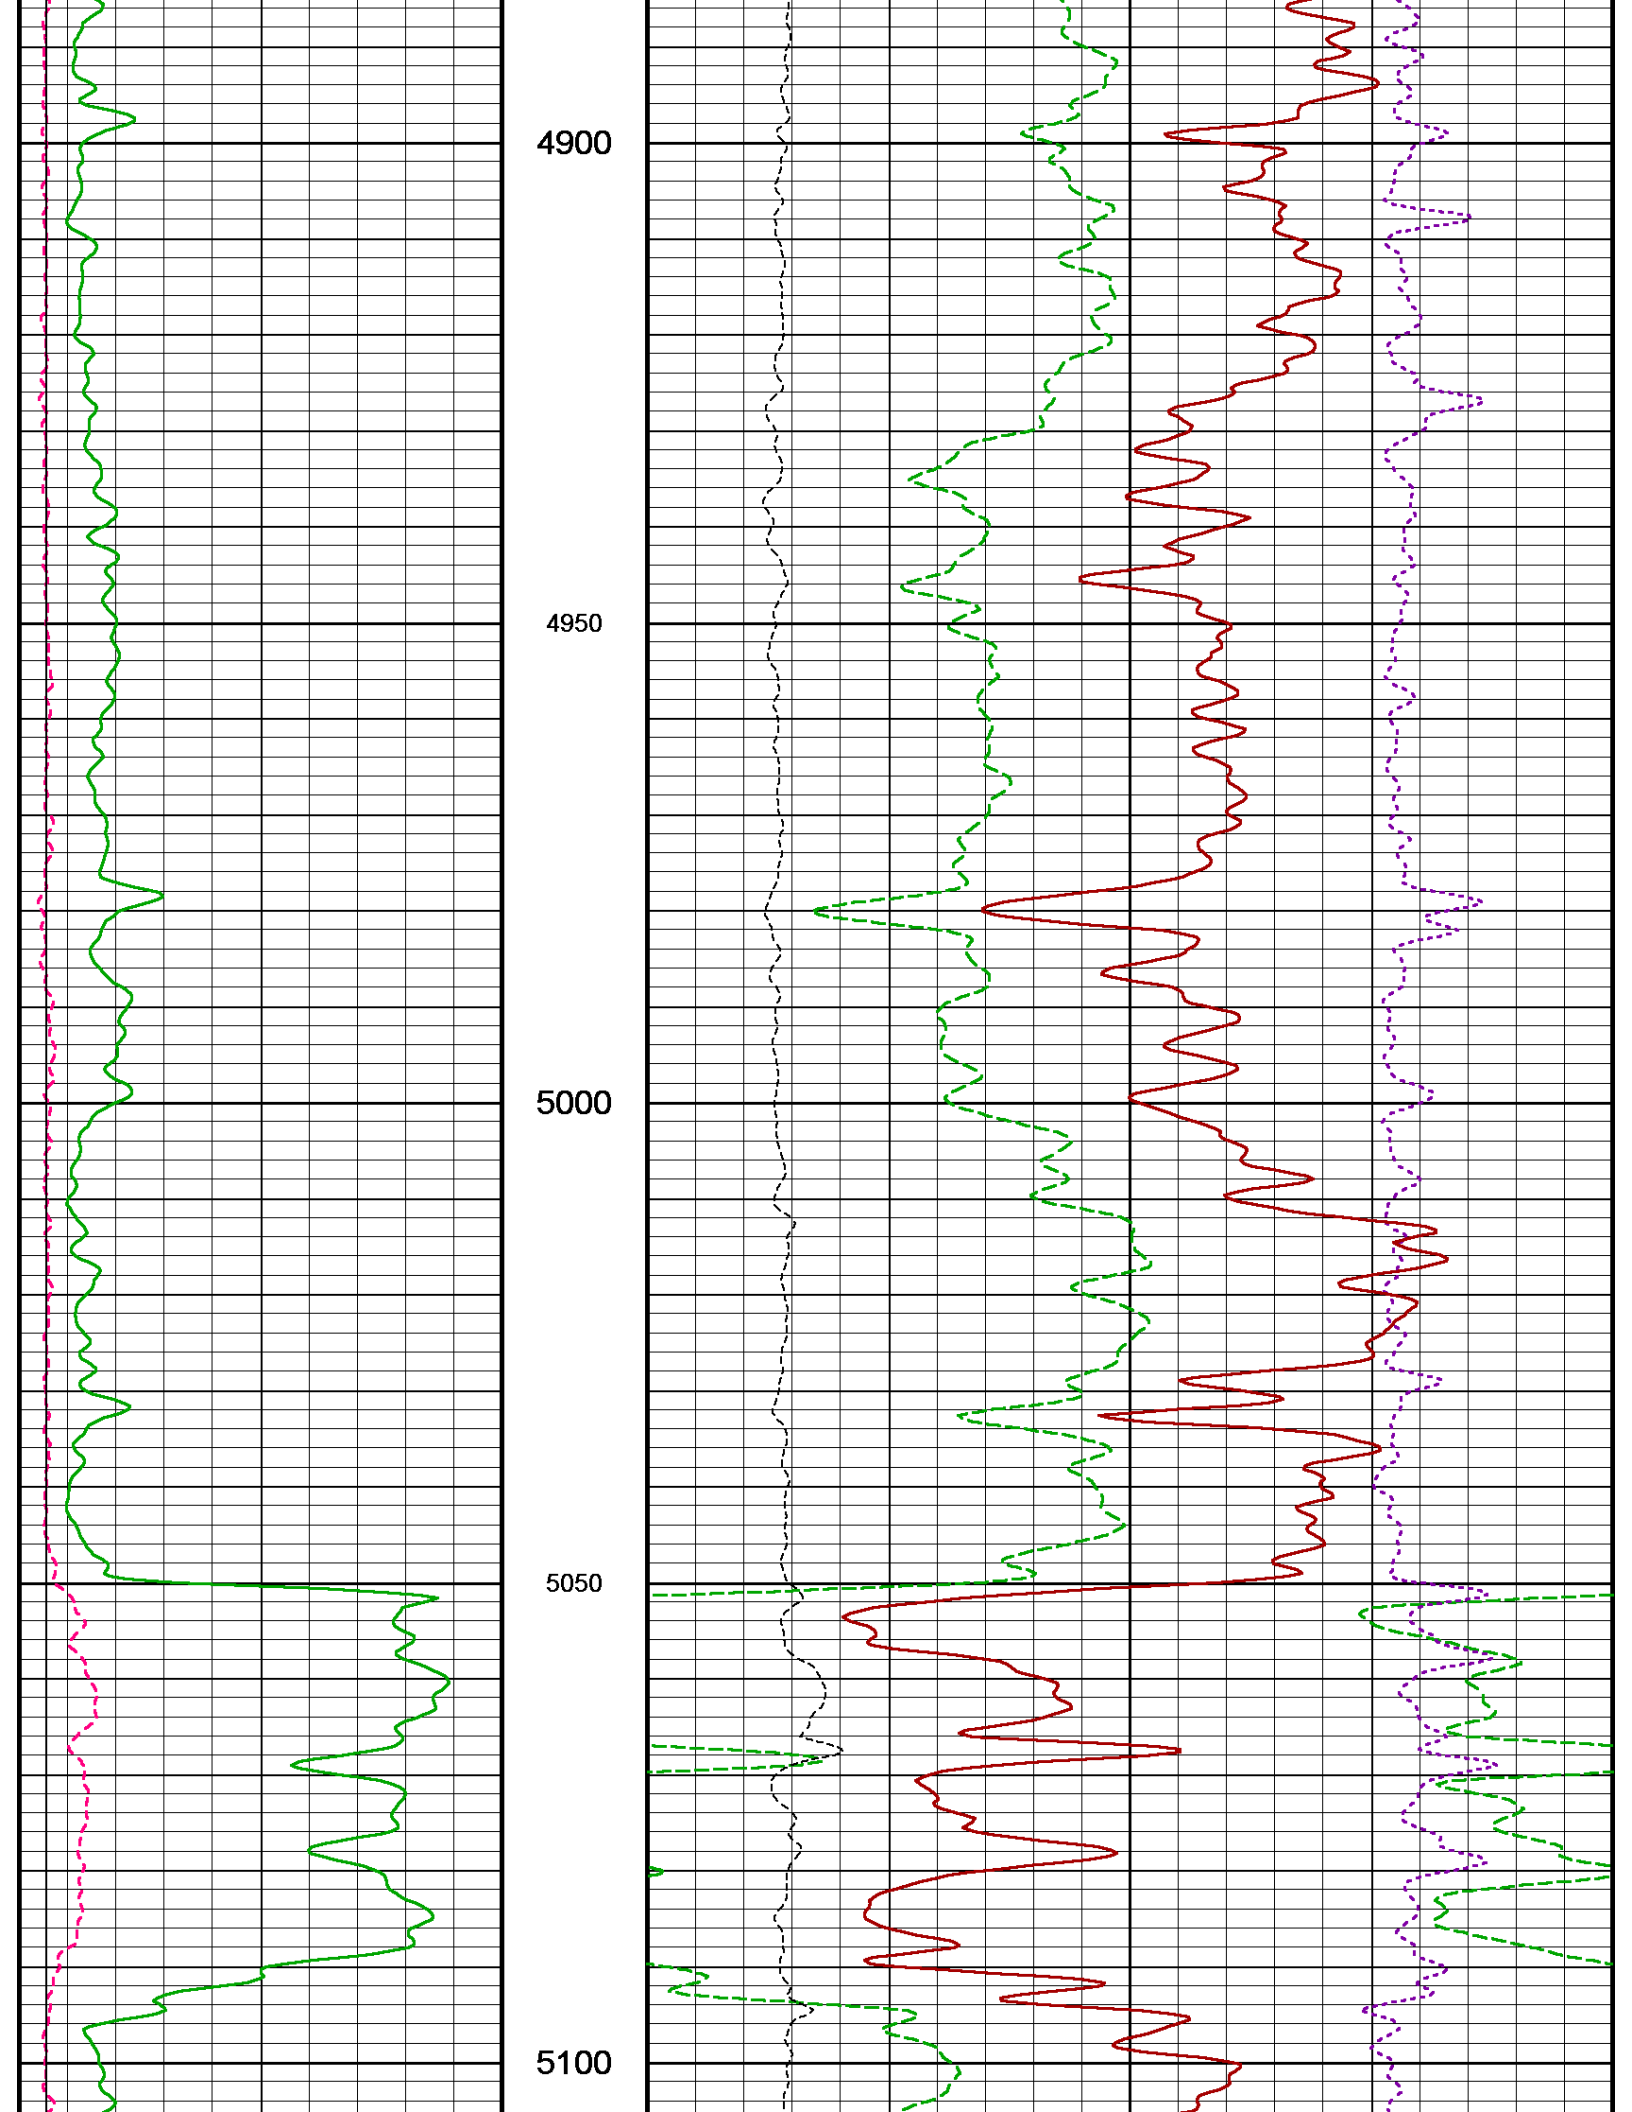

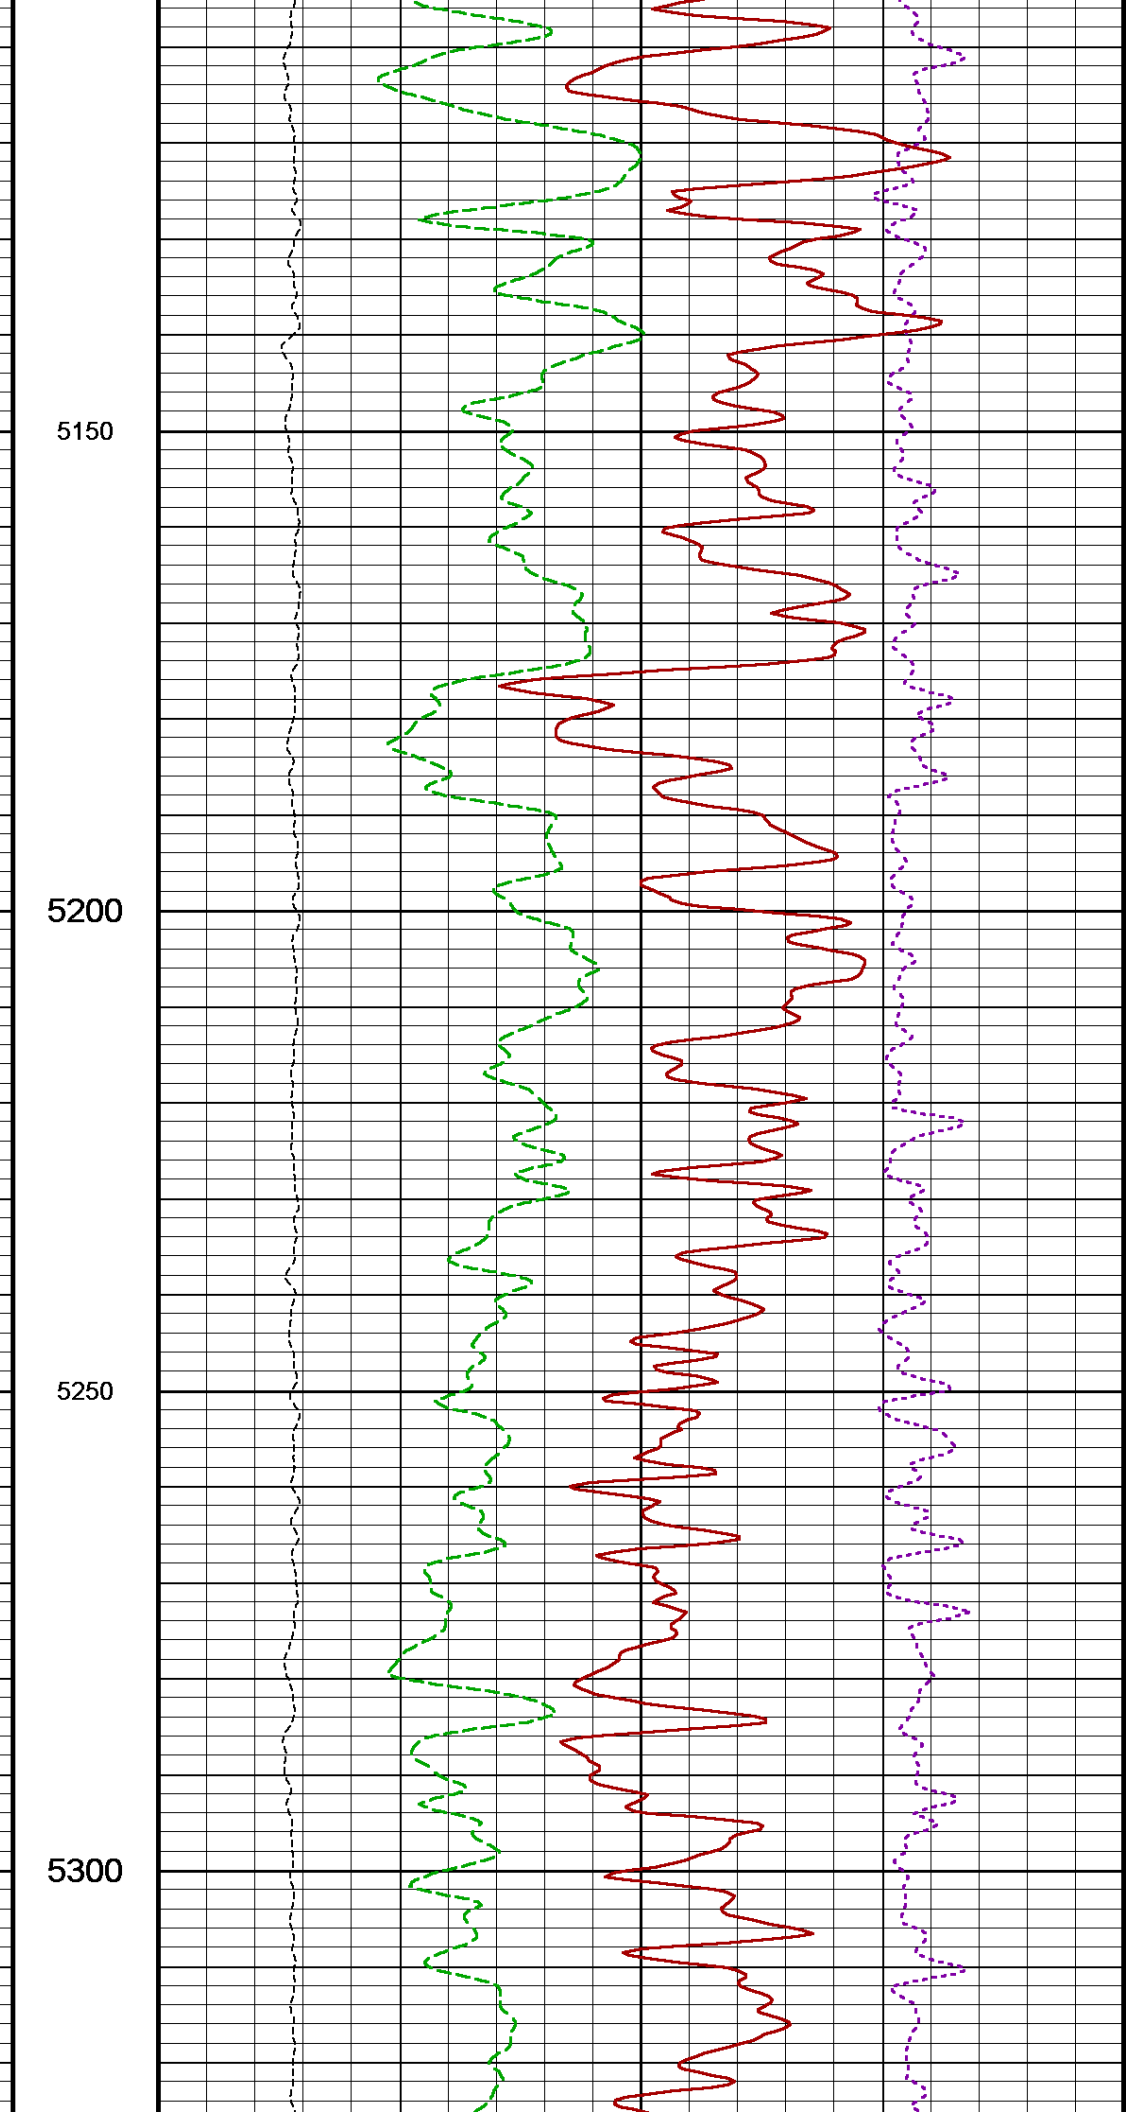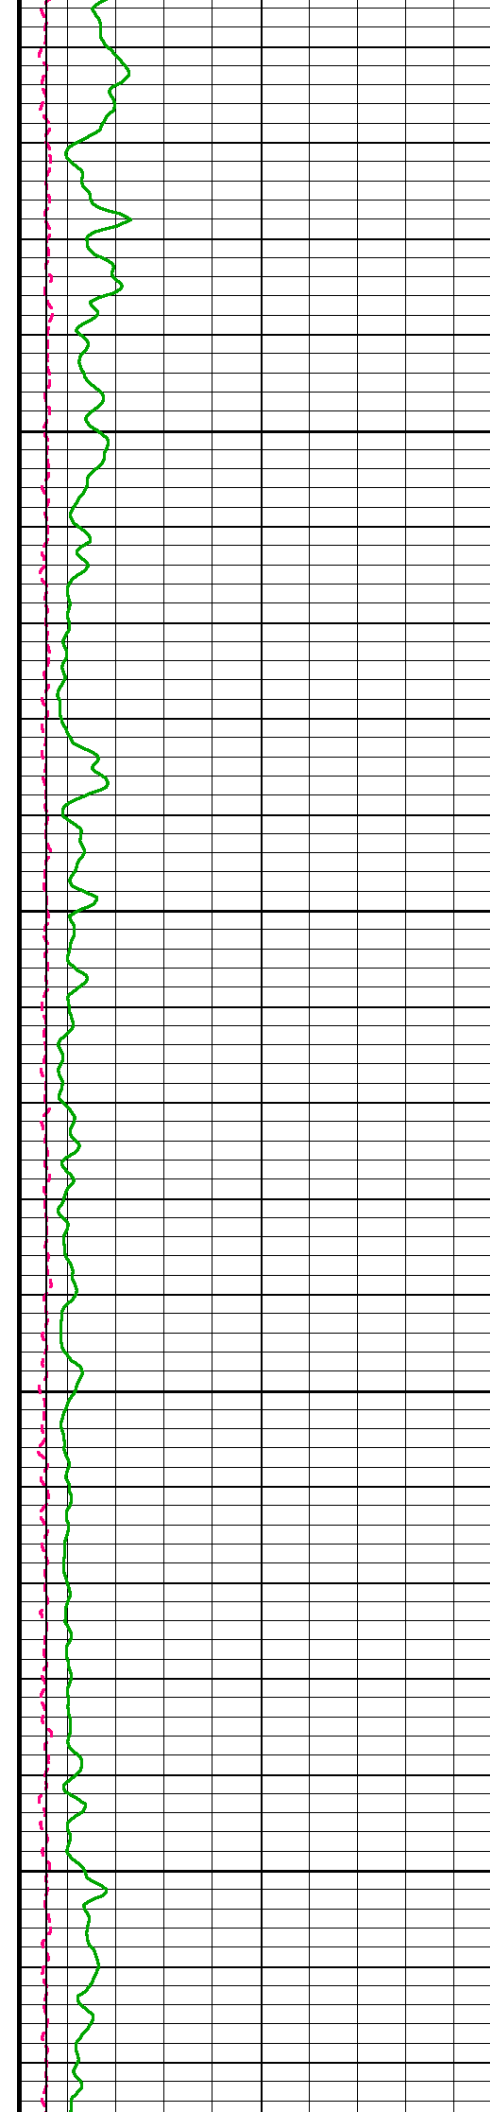

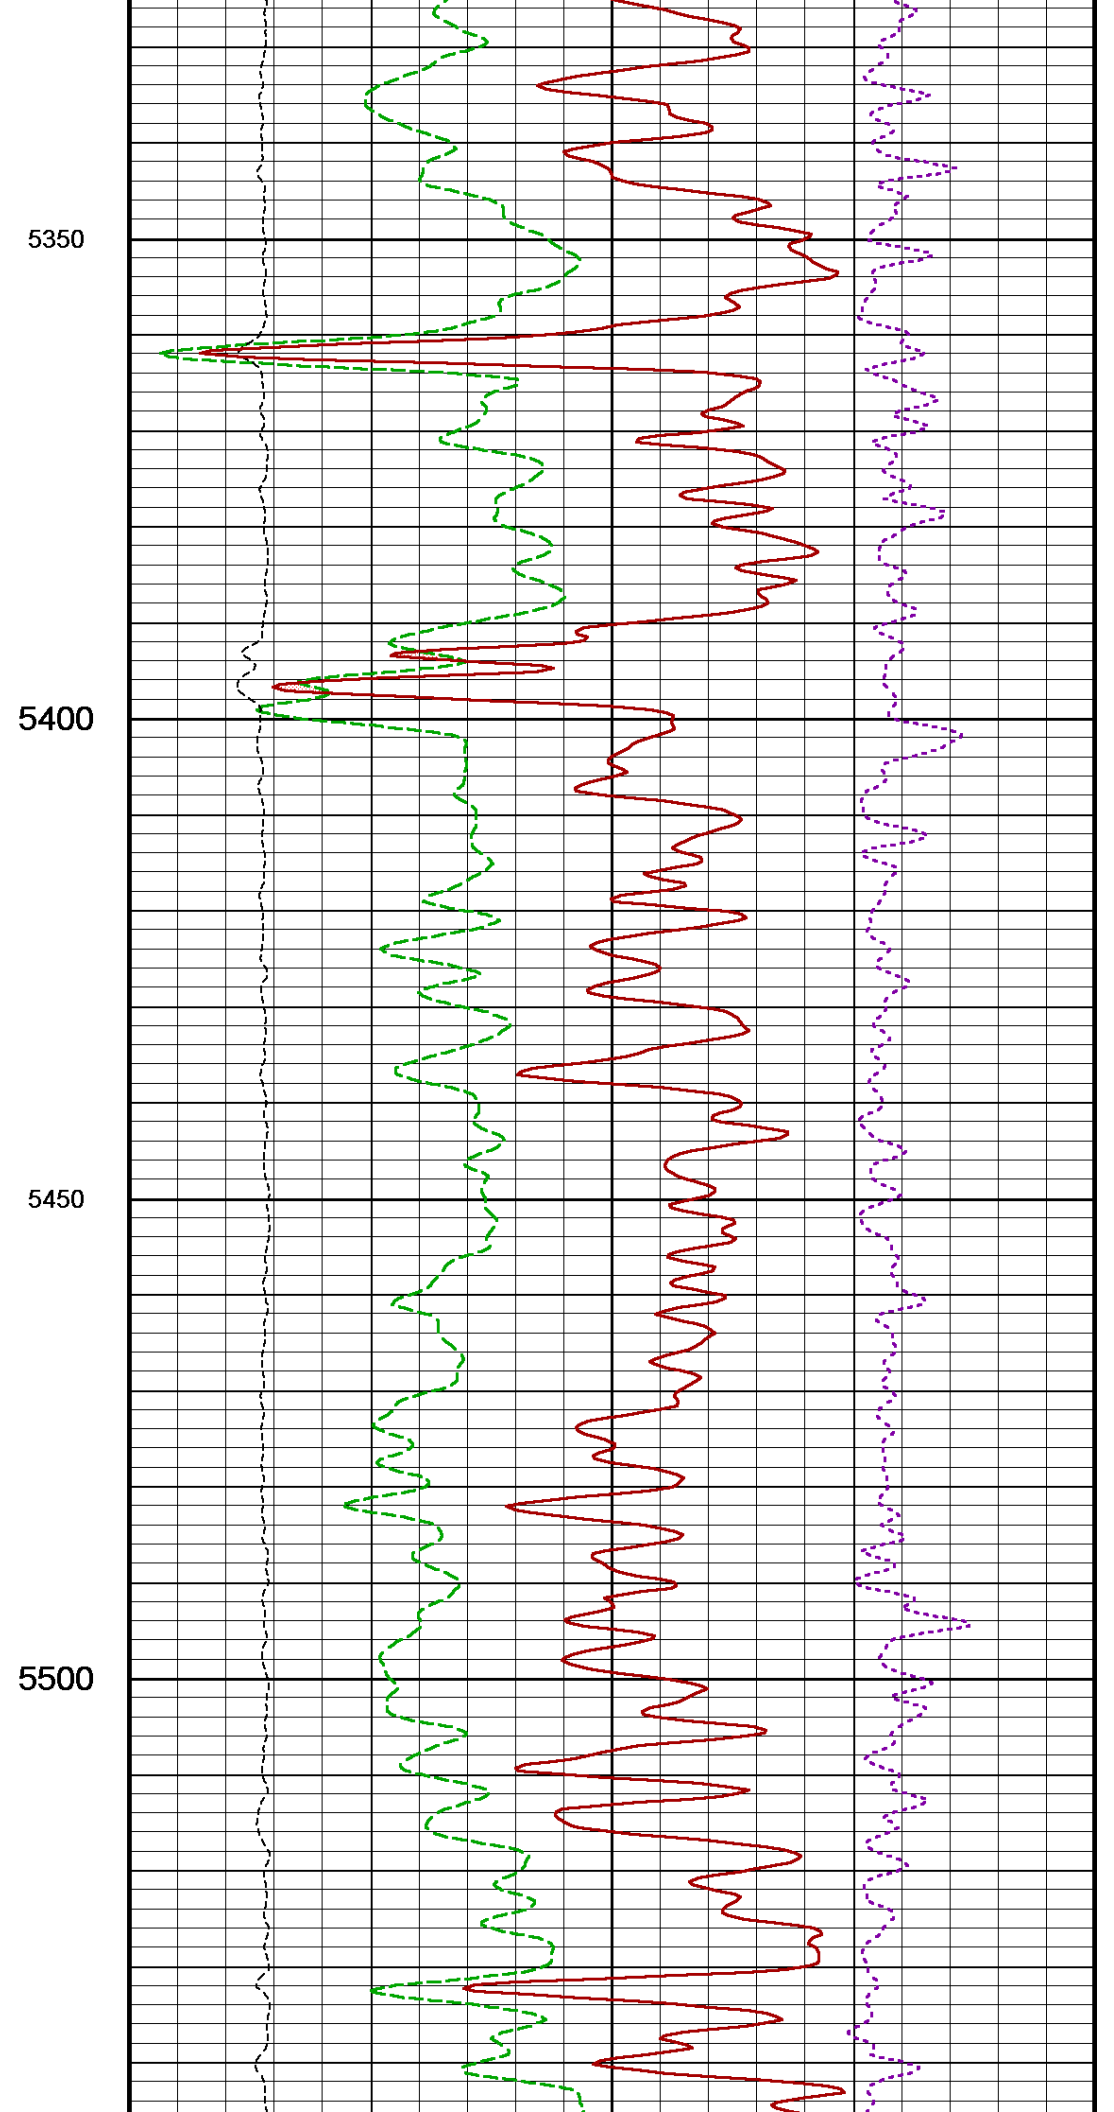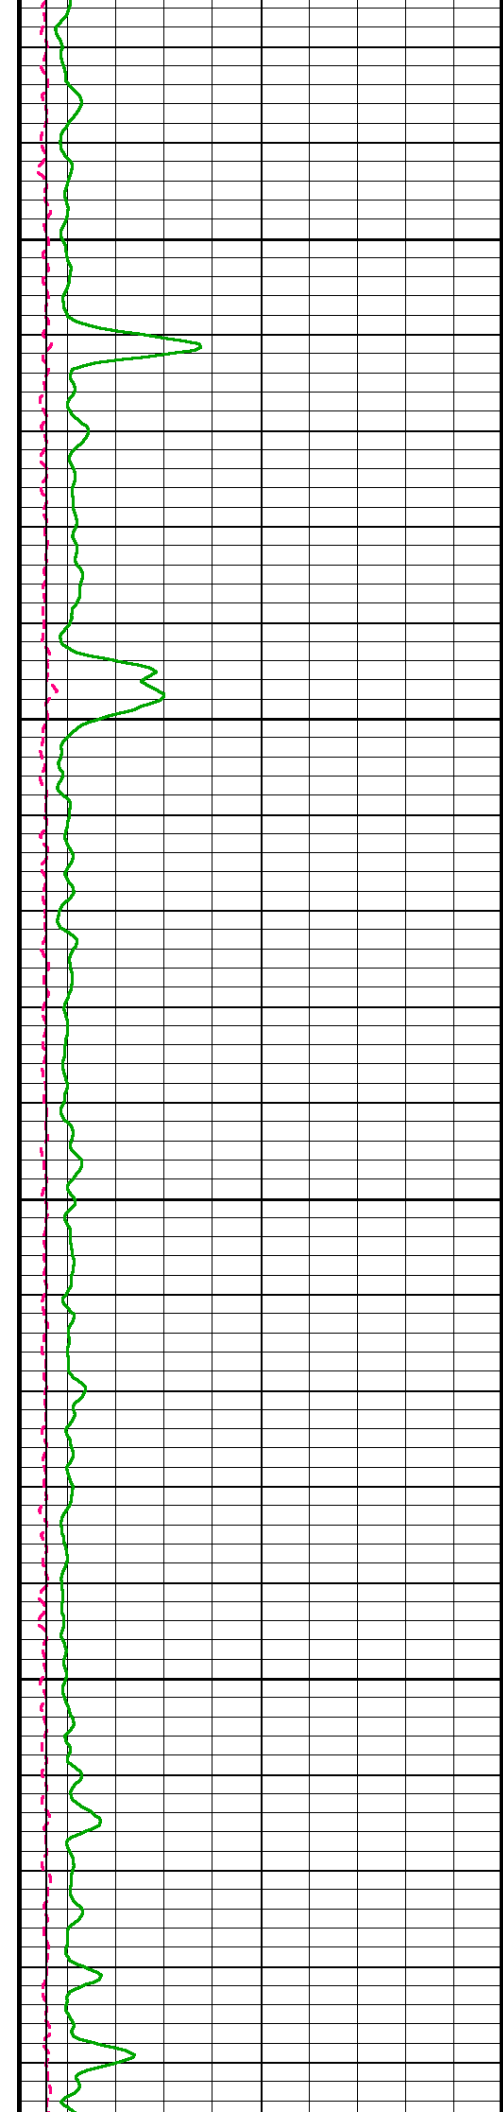

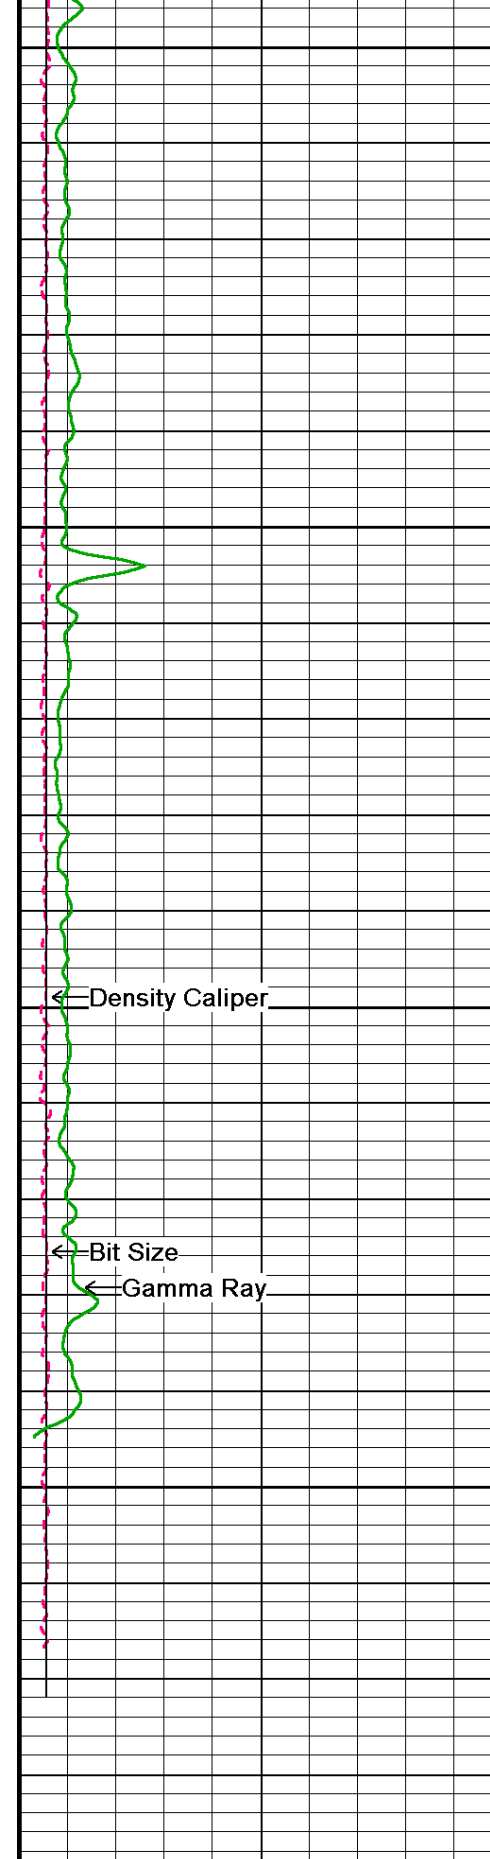

5550

5600

5650

5700

5738

Depth
in
Feet

Density Caliper


in

5 15 25

Density Caliper

Bit Size

Gamma Ray

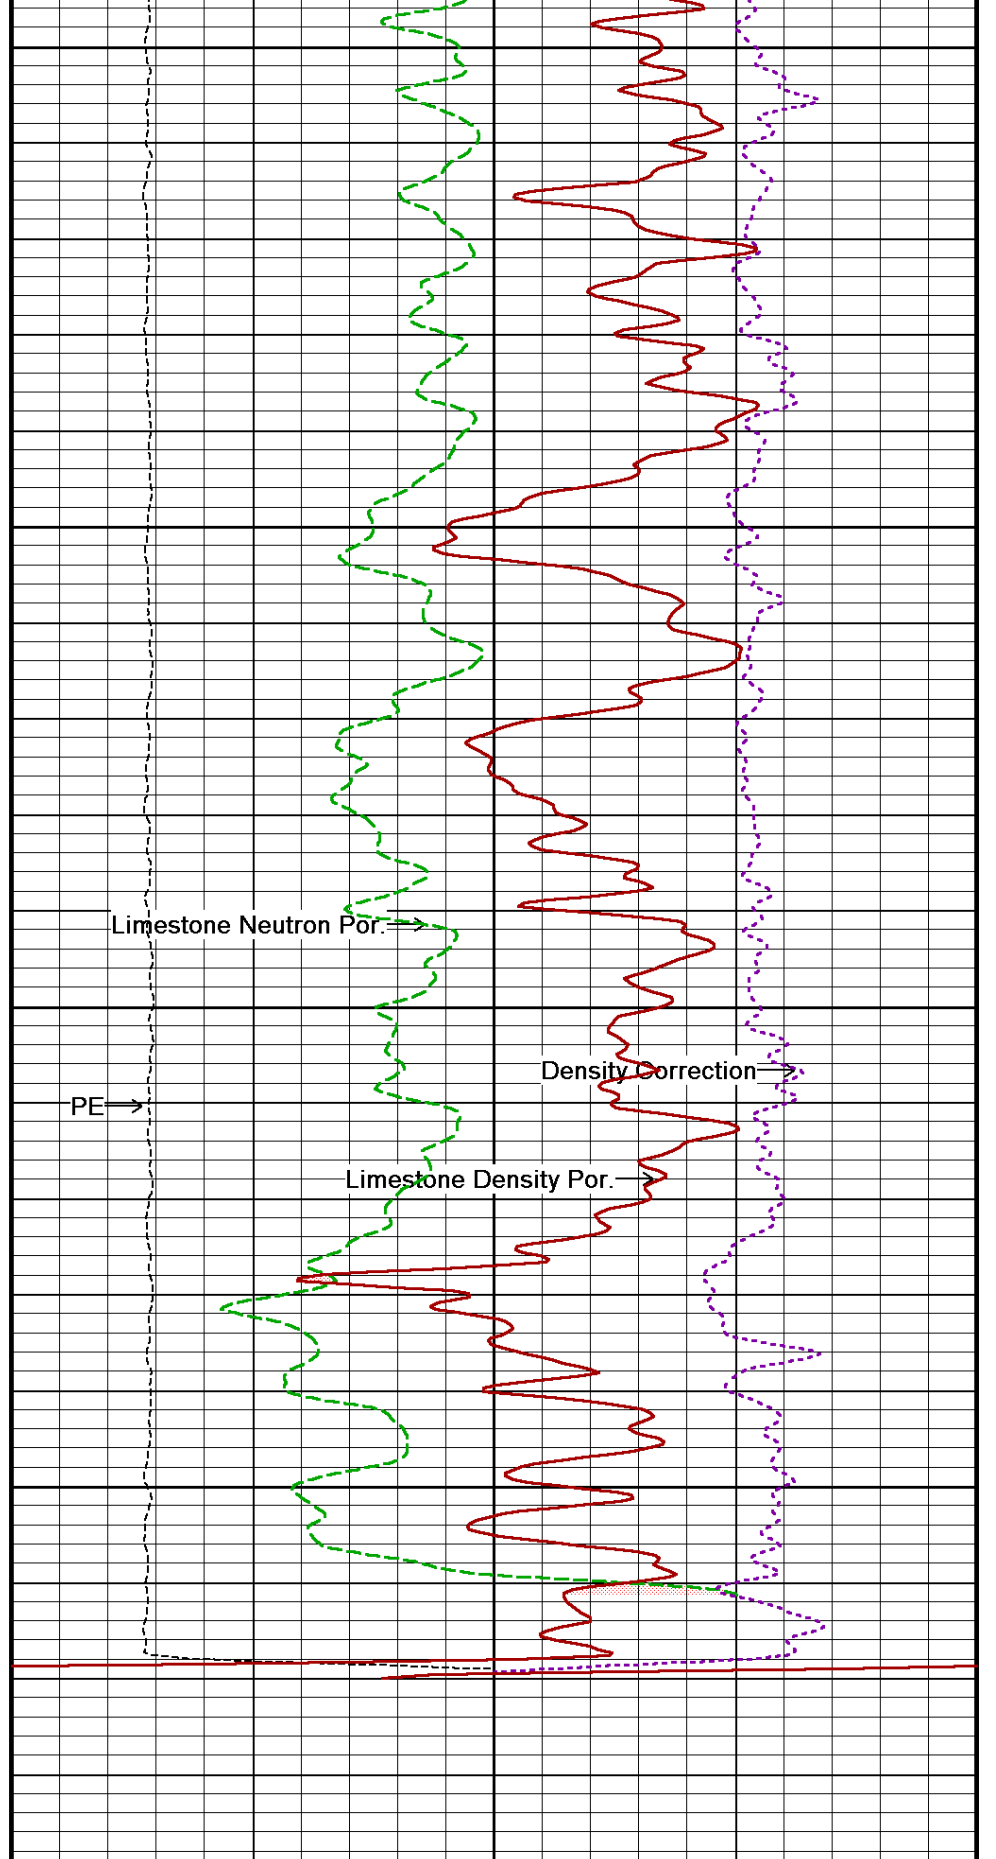

Limestone Neutron Por.

PE

Limestone Density Por.


Density Correction

Limestone Neutron Por.


dec(Is)

0.30 0.20 0.10 0.00 -0.10

0.70 0.60 0.50 0.40 0.30

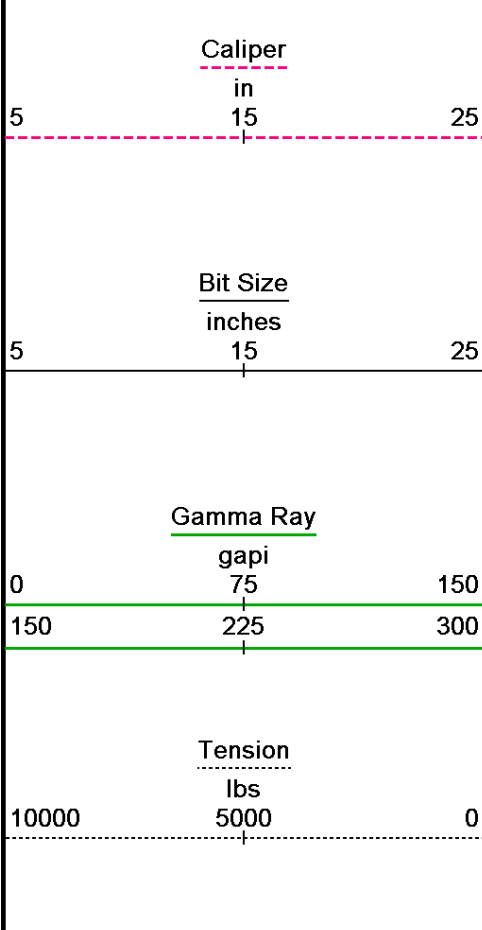

Replay
Scale
1:240

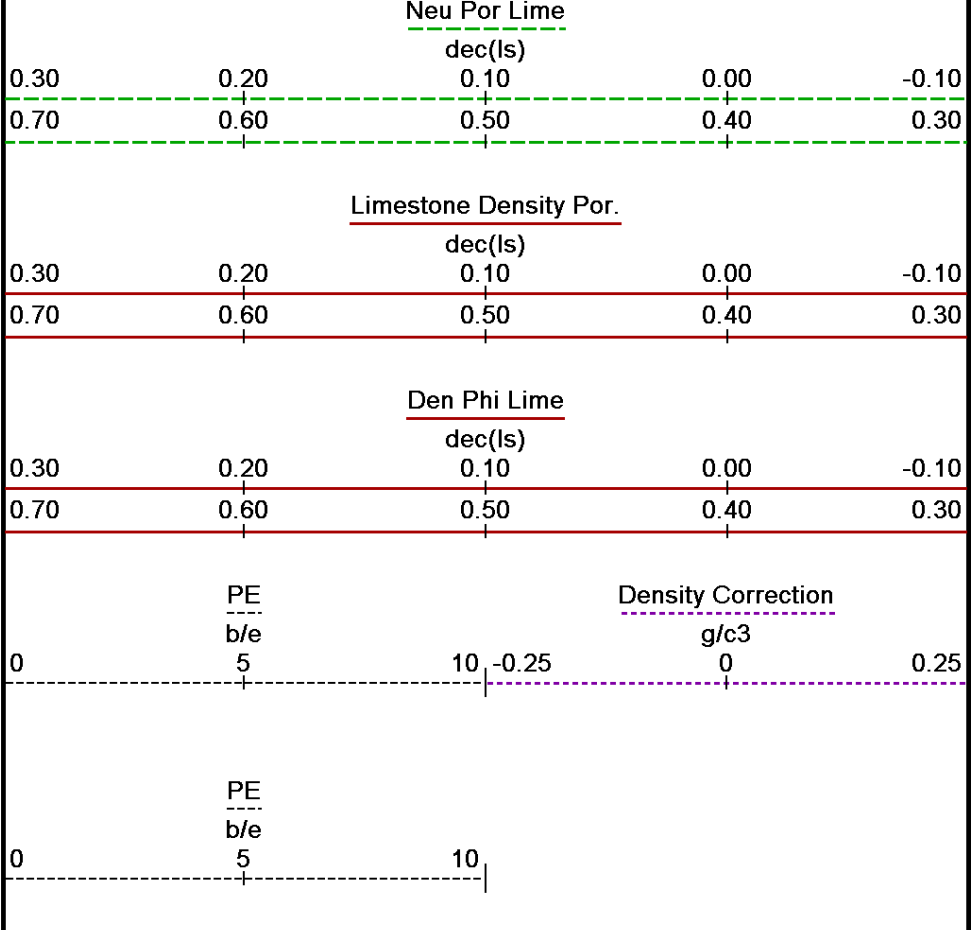


Depth Based Data - Maximum Sampling Increment 10.0cm
 Filename: C:\DOCUME~1\hopkinjg\LOCALS~1\Temp\Weatherford ...\McCord 'A' 20H_(Composite)_.dta
 System Versions: Plotted with 12.01.3513
 Plotted on 02-DEC-2011 17:20
 Recorded on |


5 INCH MAIN LOG


5 INCH BULK DENSITY LOG

Depth Based Data - Maximum Sampling Increment 10.0cm
 Filename: C:\DOCUME~1\hopkinjg\LOCALS~1\Temp\Weatherford ...\McCord 'A' 20H_(Composite)_.dta
 System Versions: Plotted with 12.01.3513
 Plotted on 02-DEC-2011 17:20
 Recorded on |

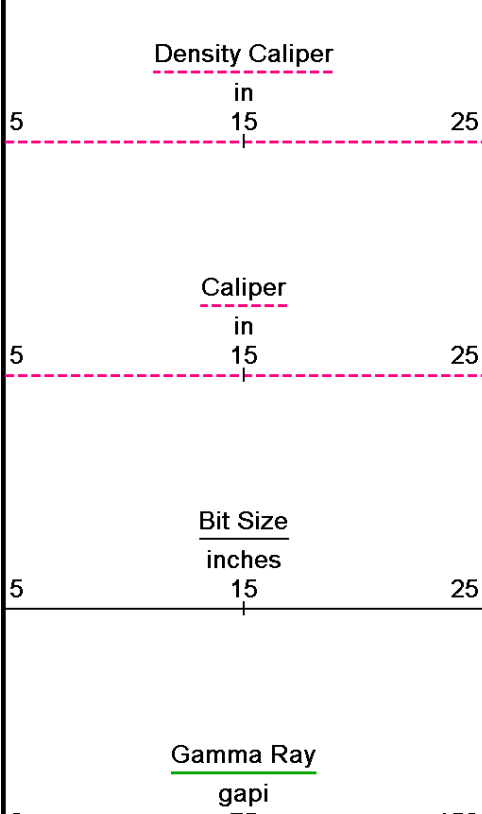

Depth
in
Feet

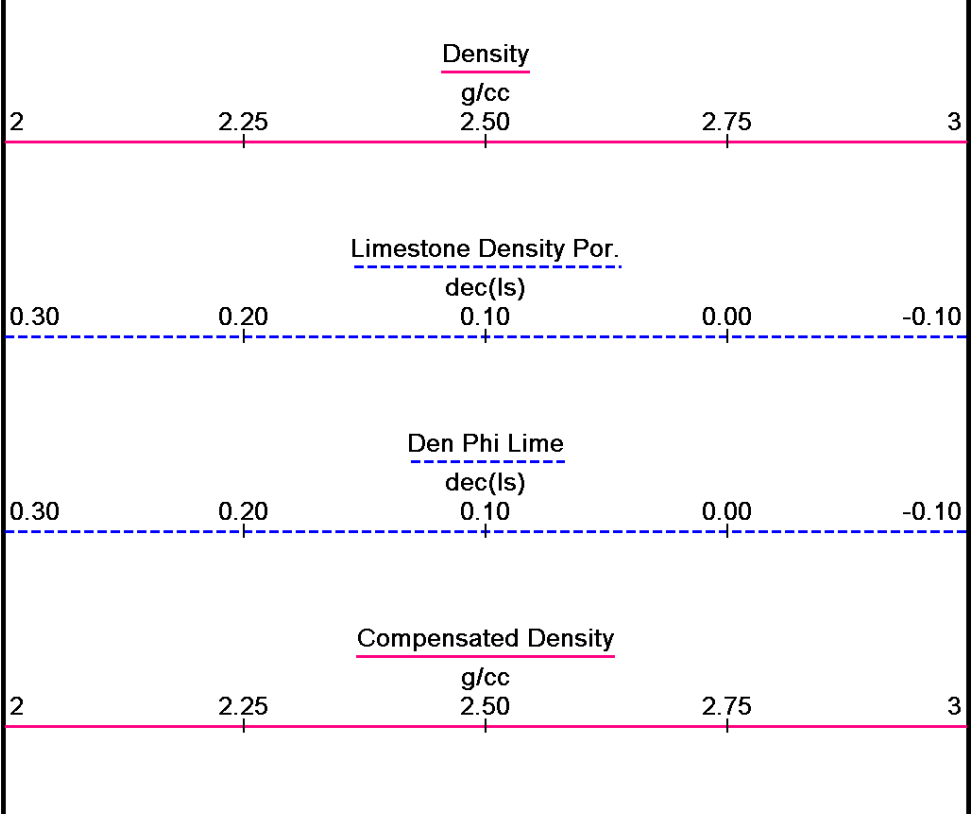

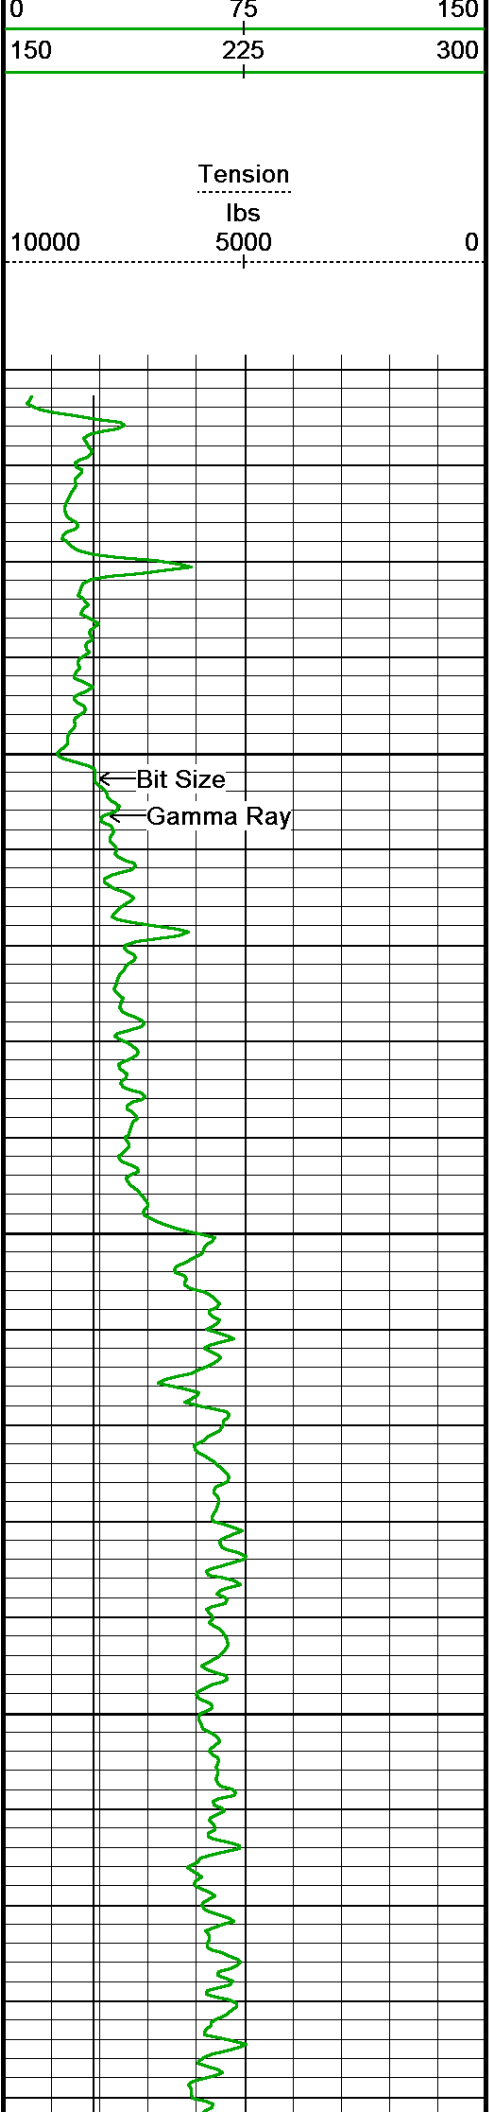


Replay
Scale
1:240


12

50

100

150

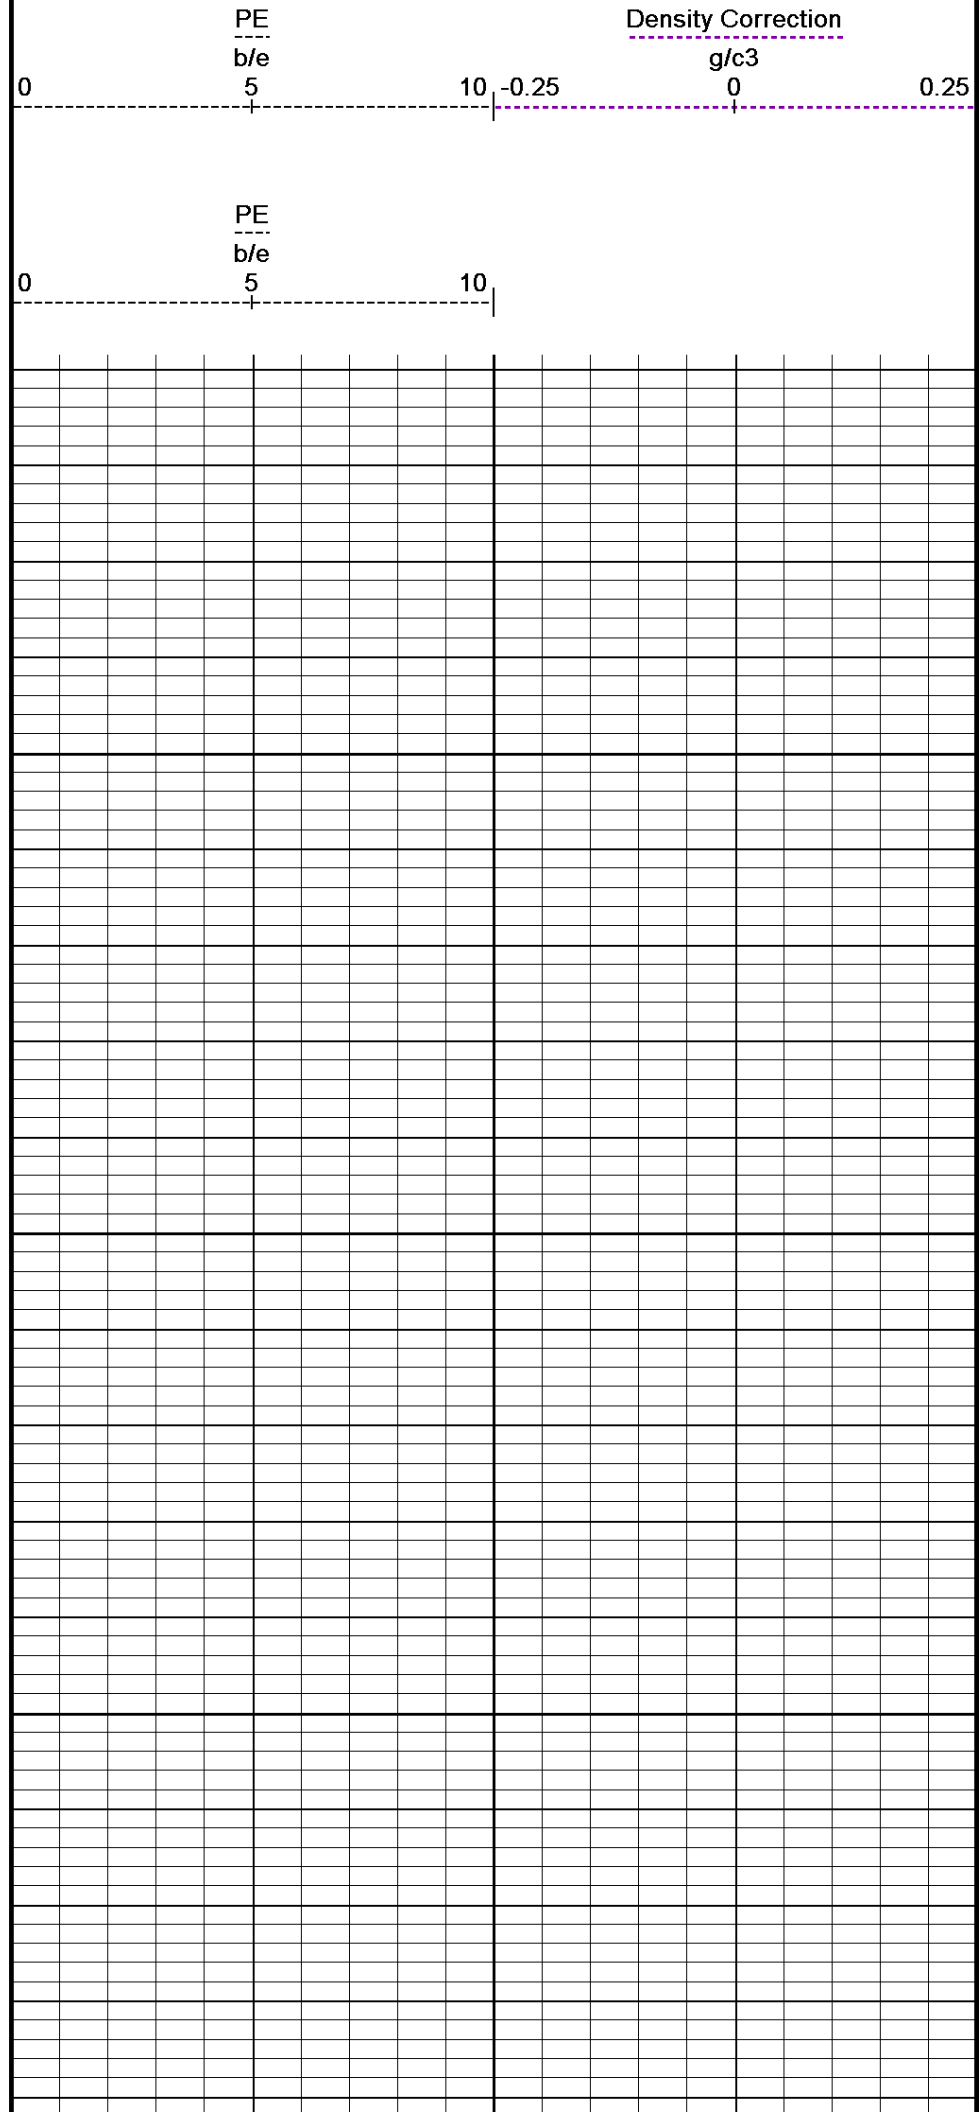

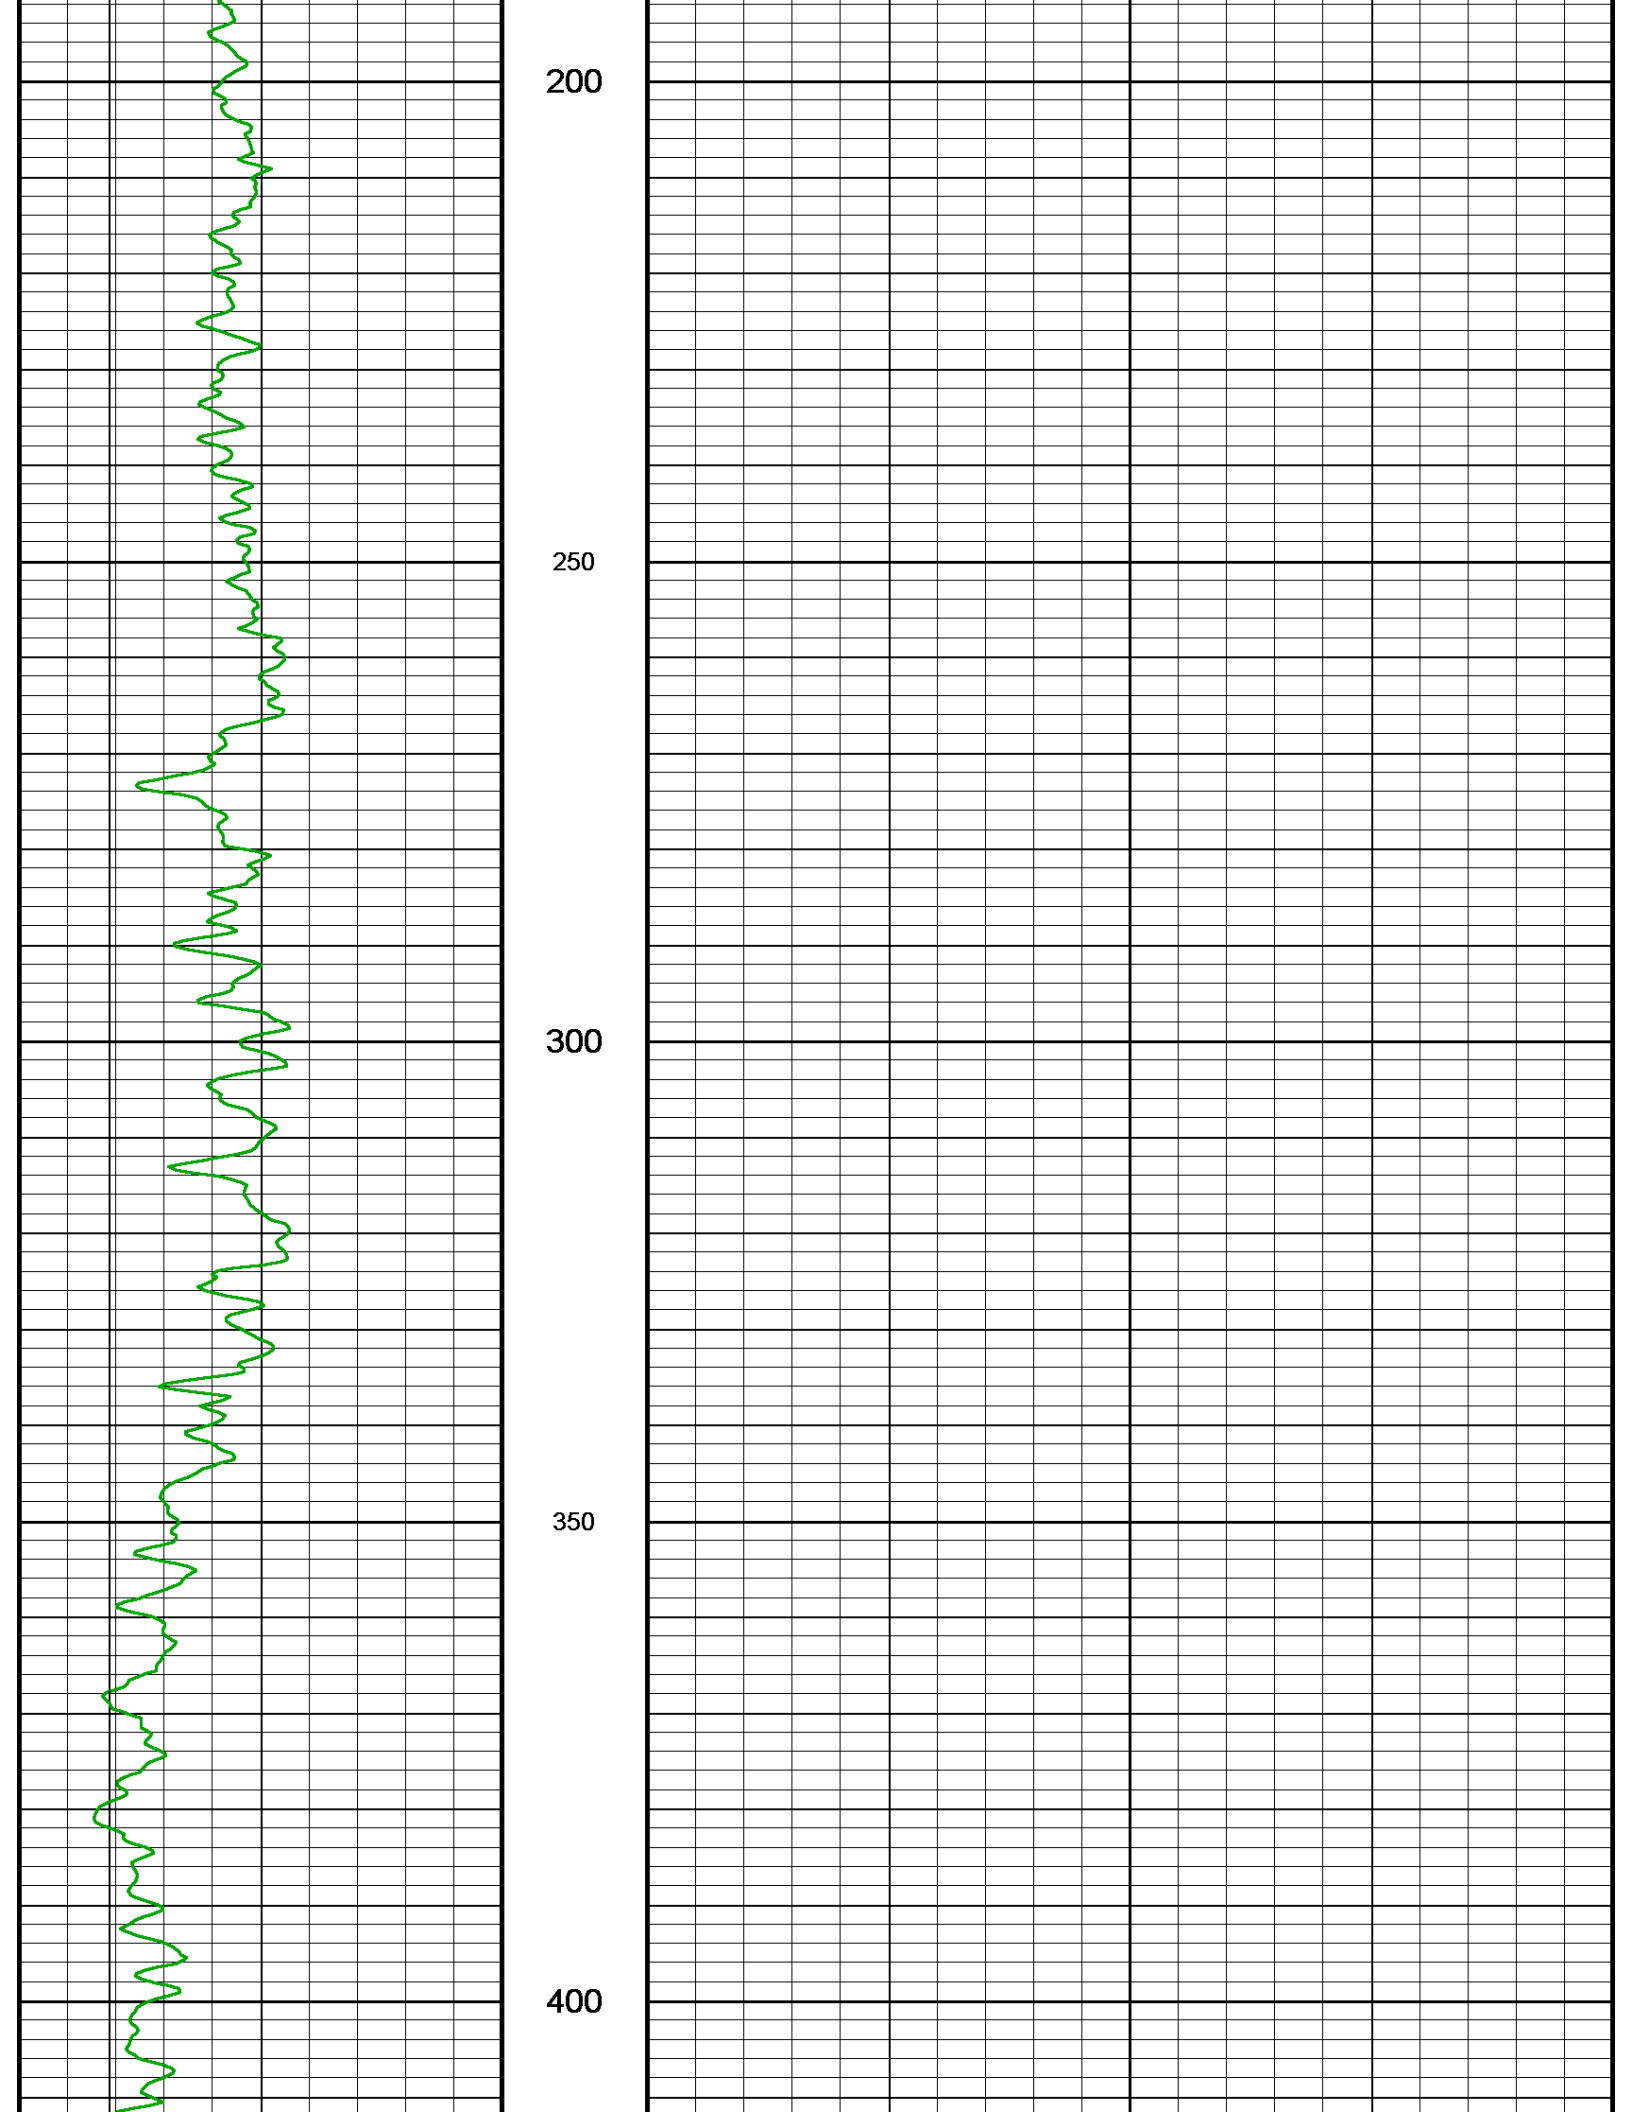



450


500

550

600

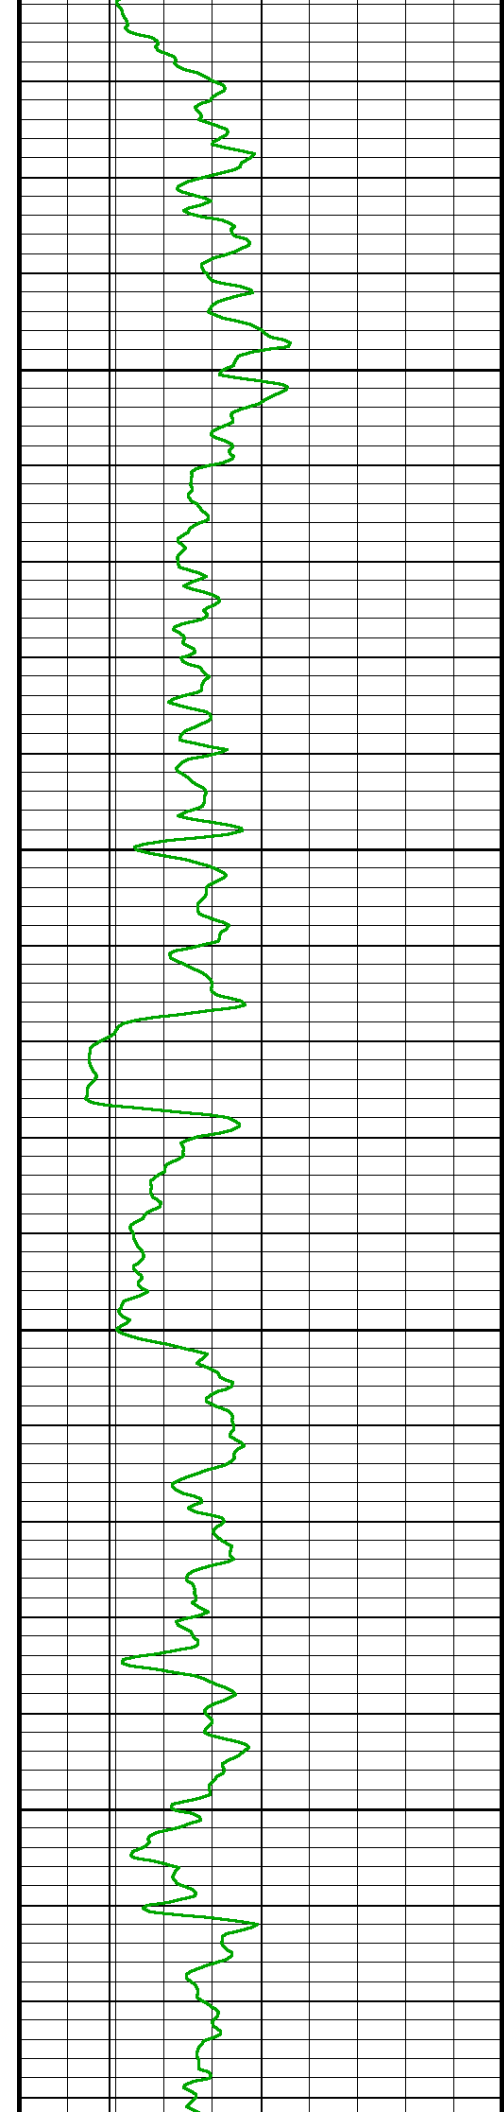

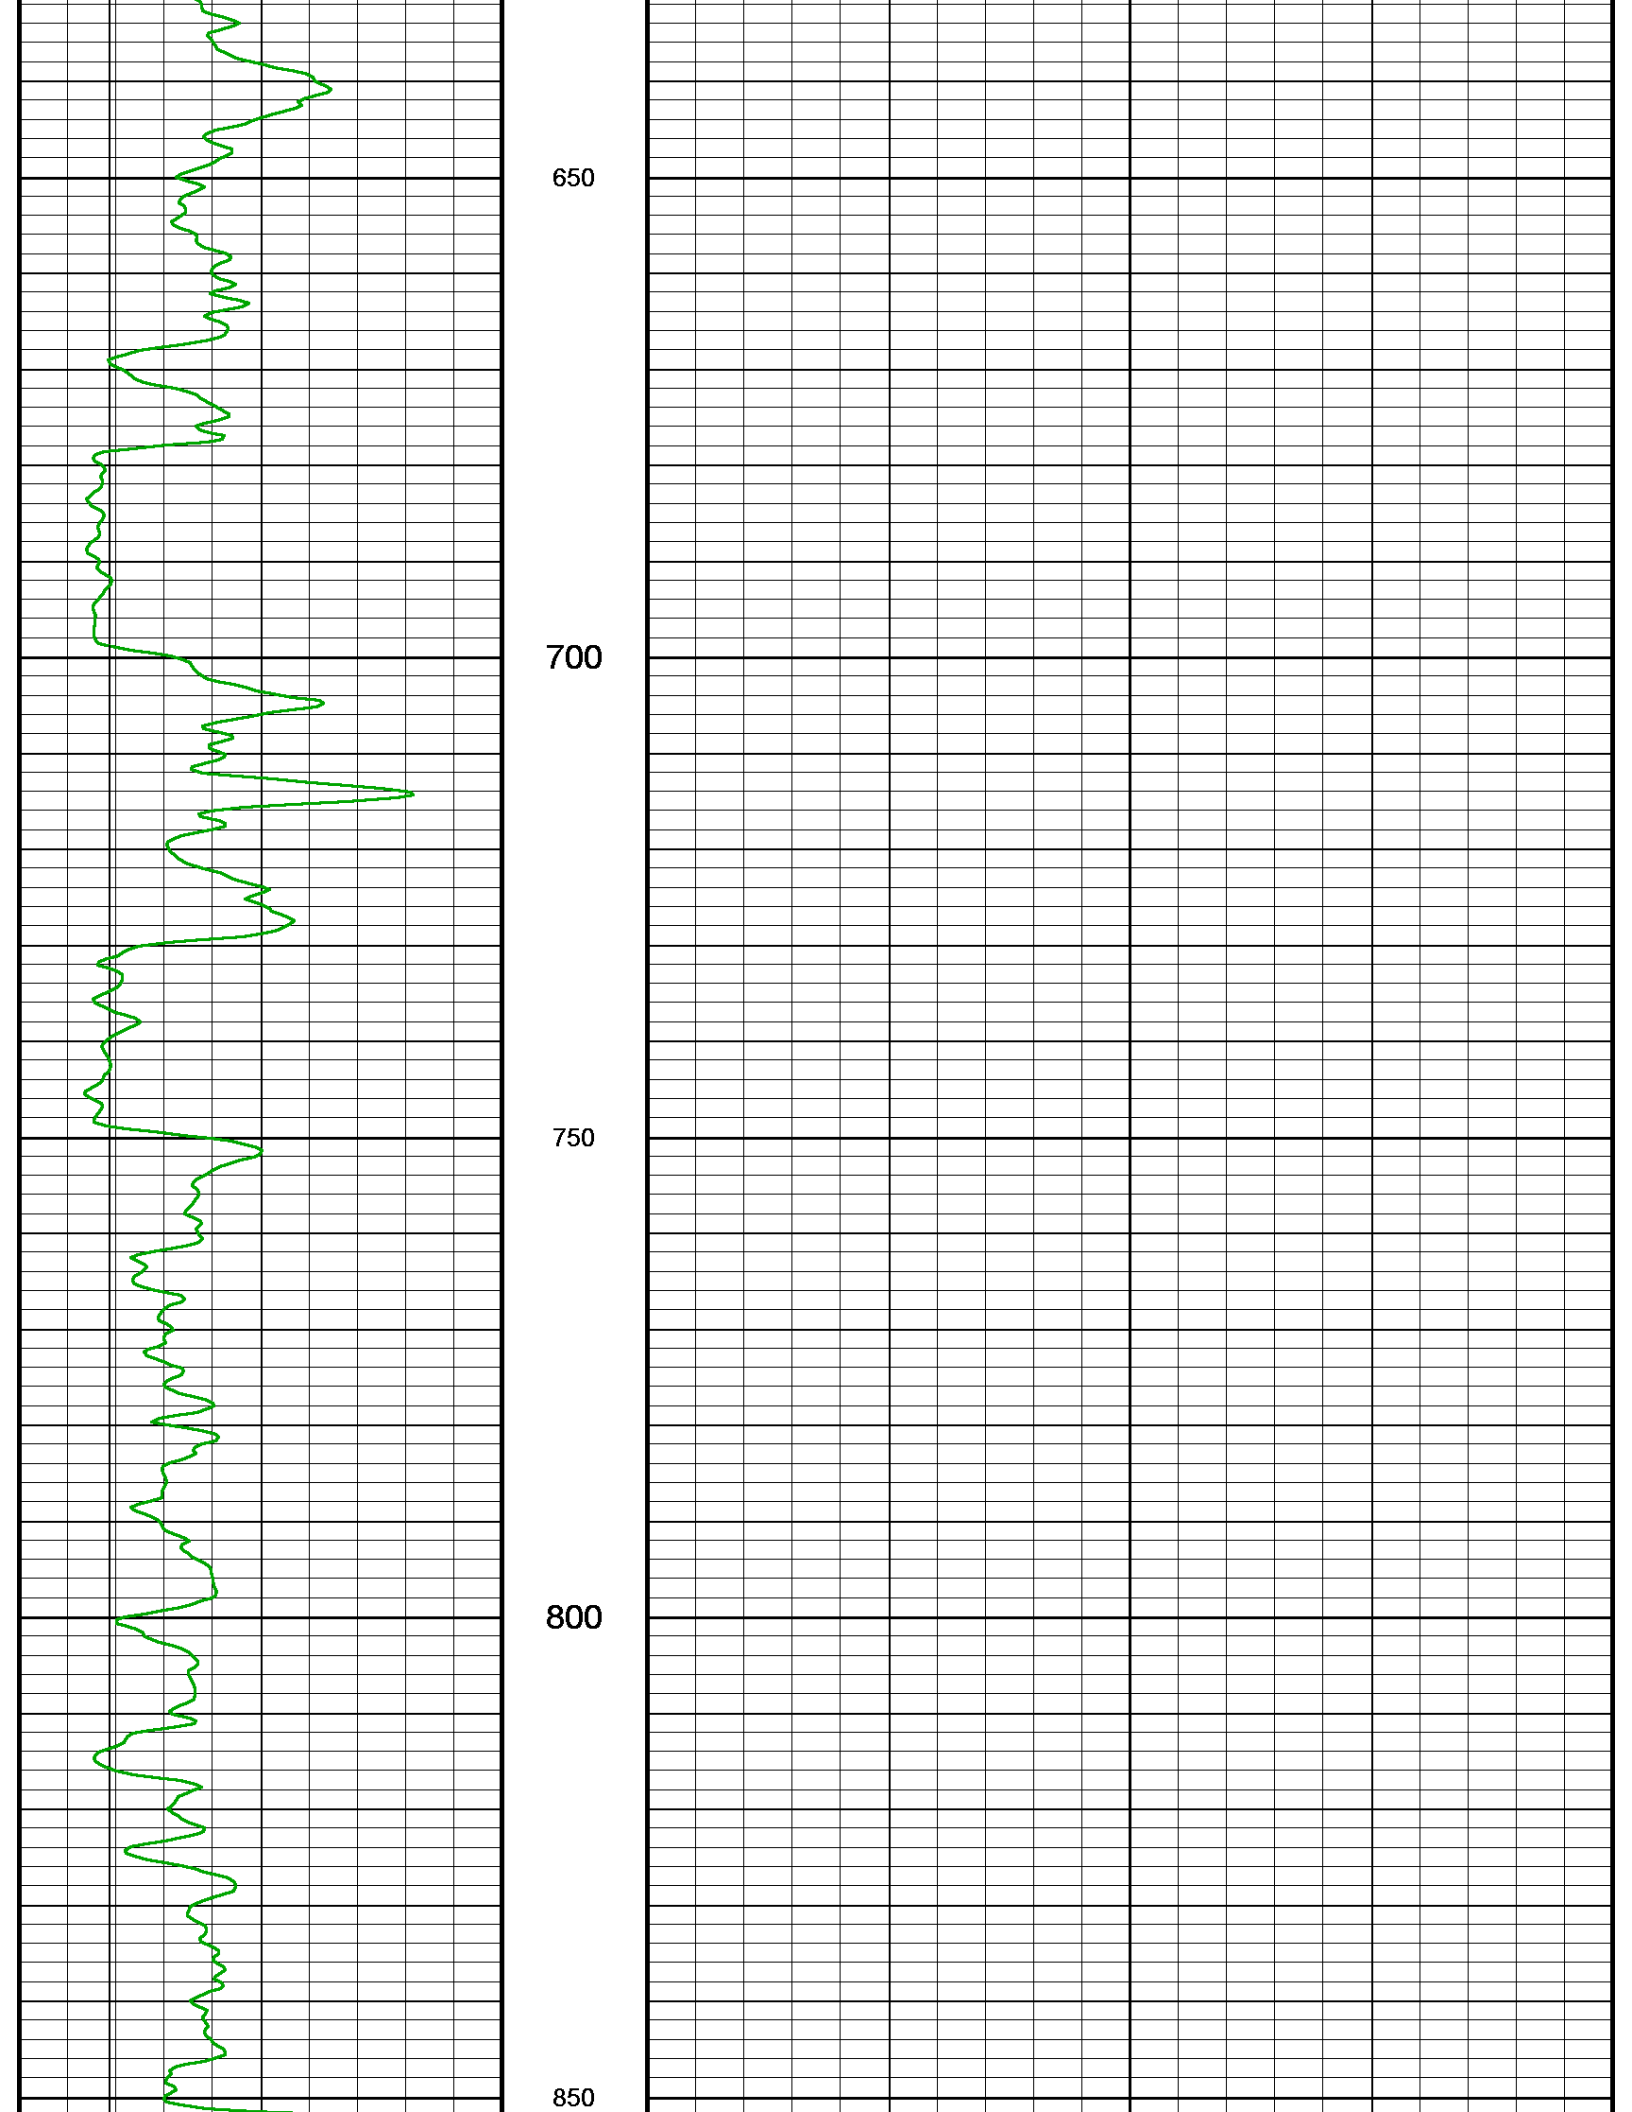

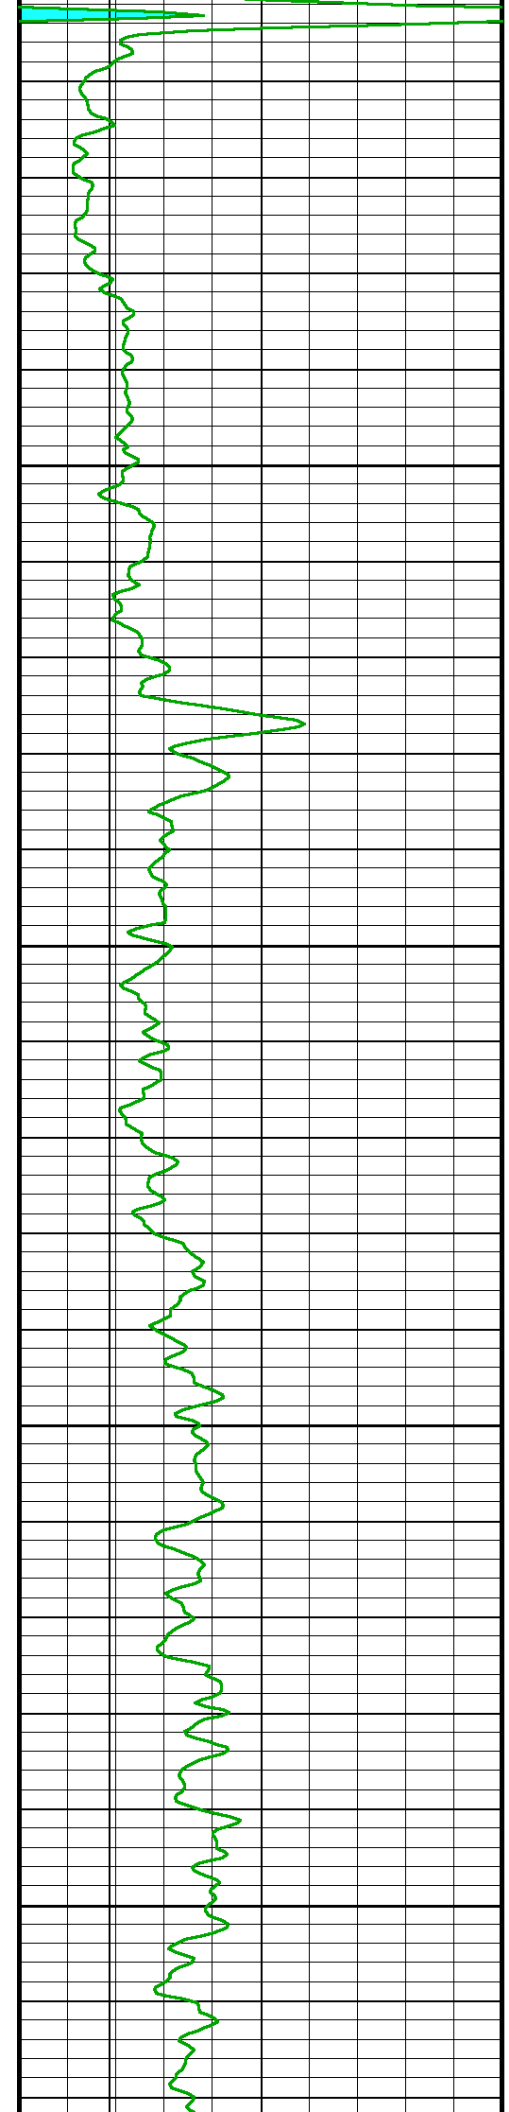


900

950

1000

1050

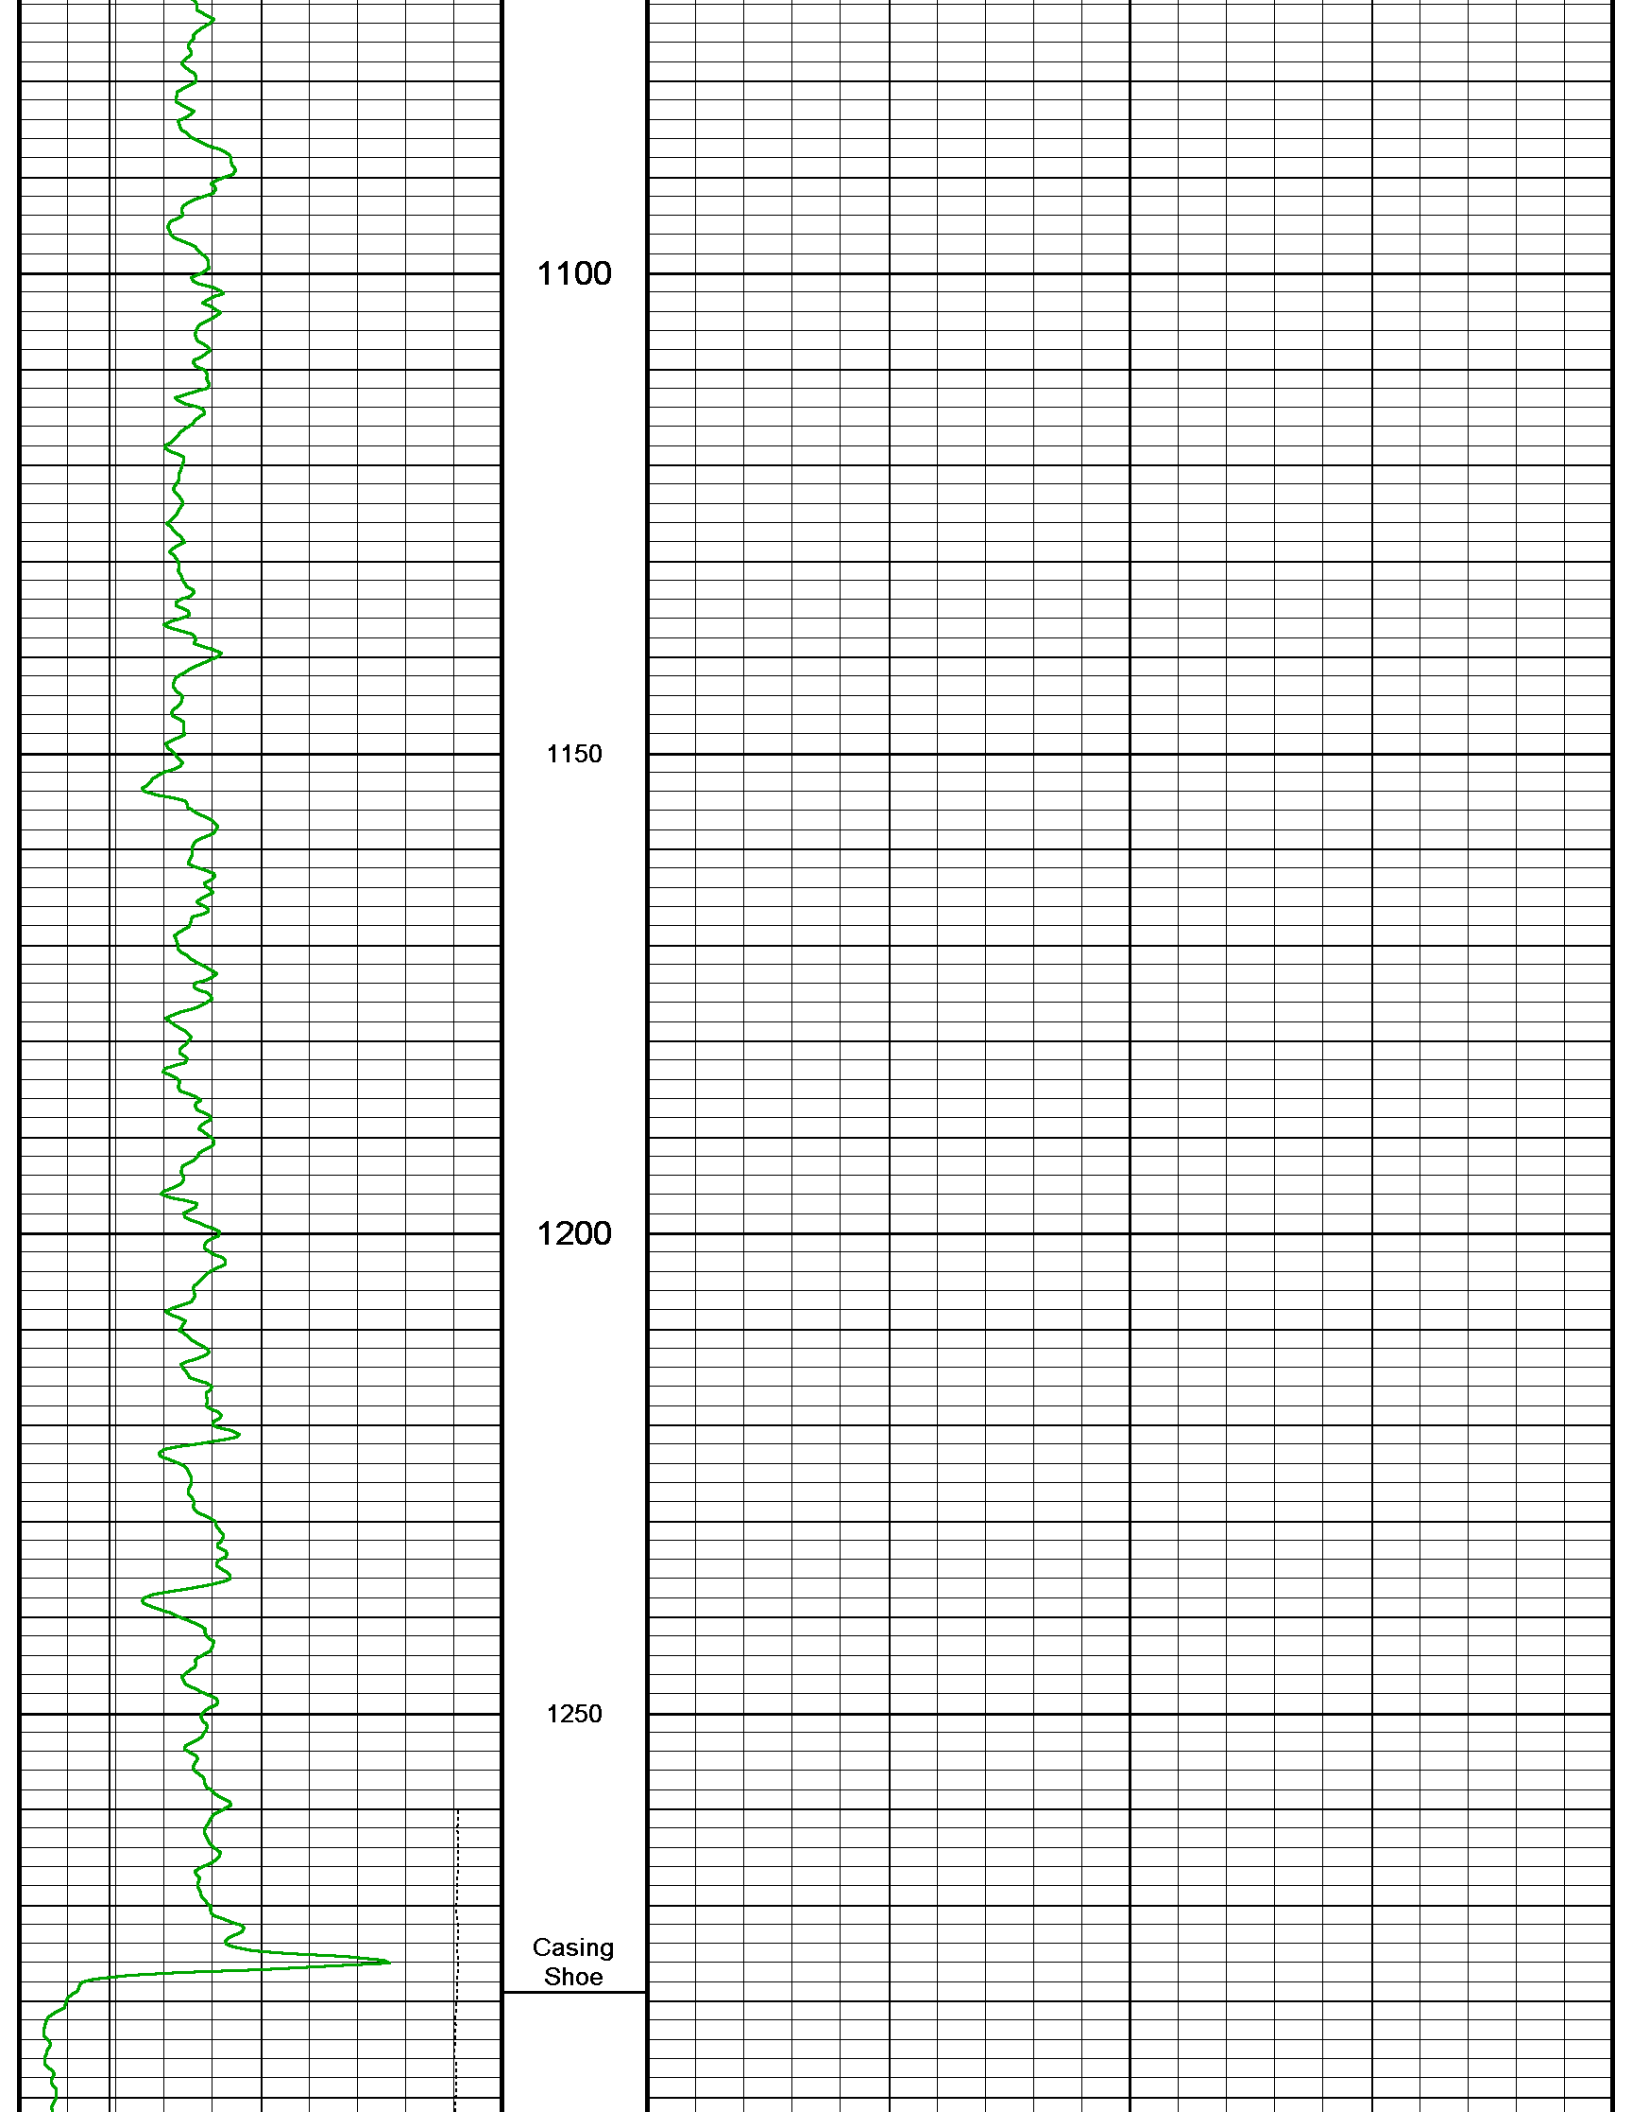


1100


1150

1200

1250

Casing
Shoe

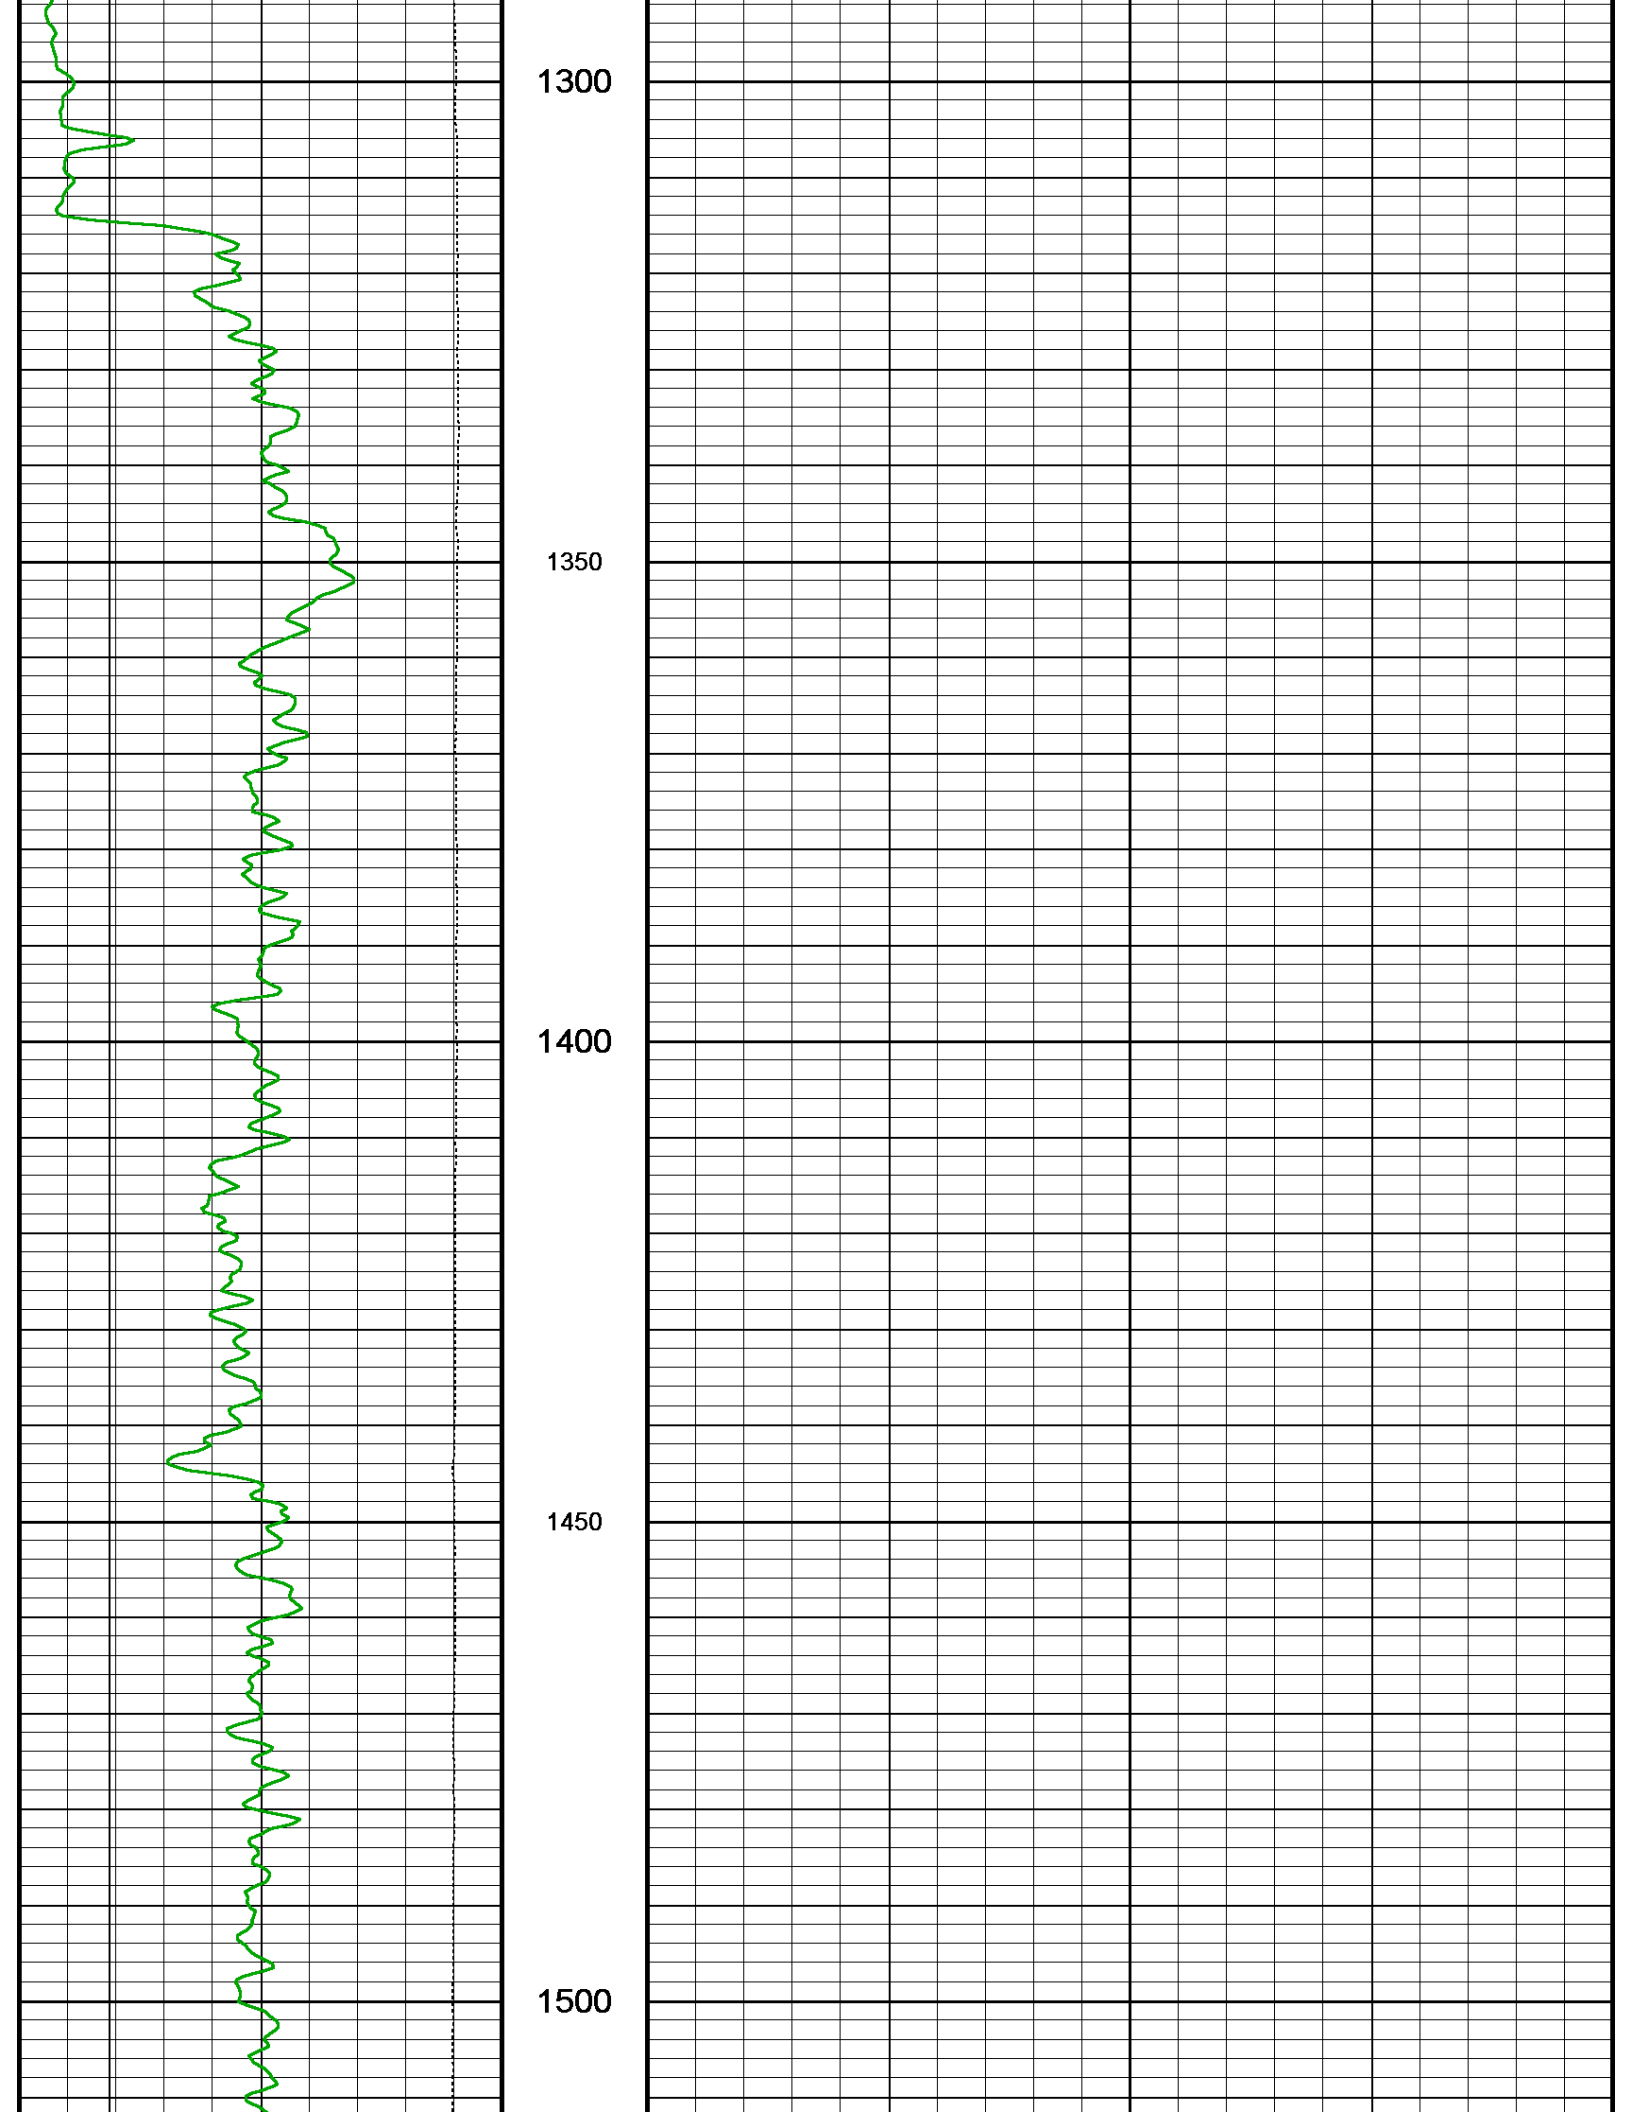

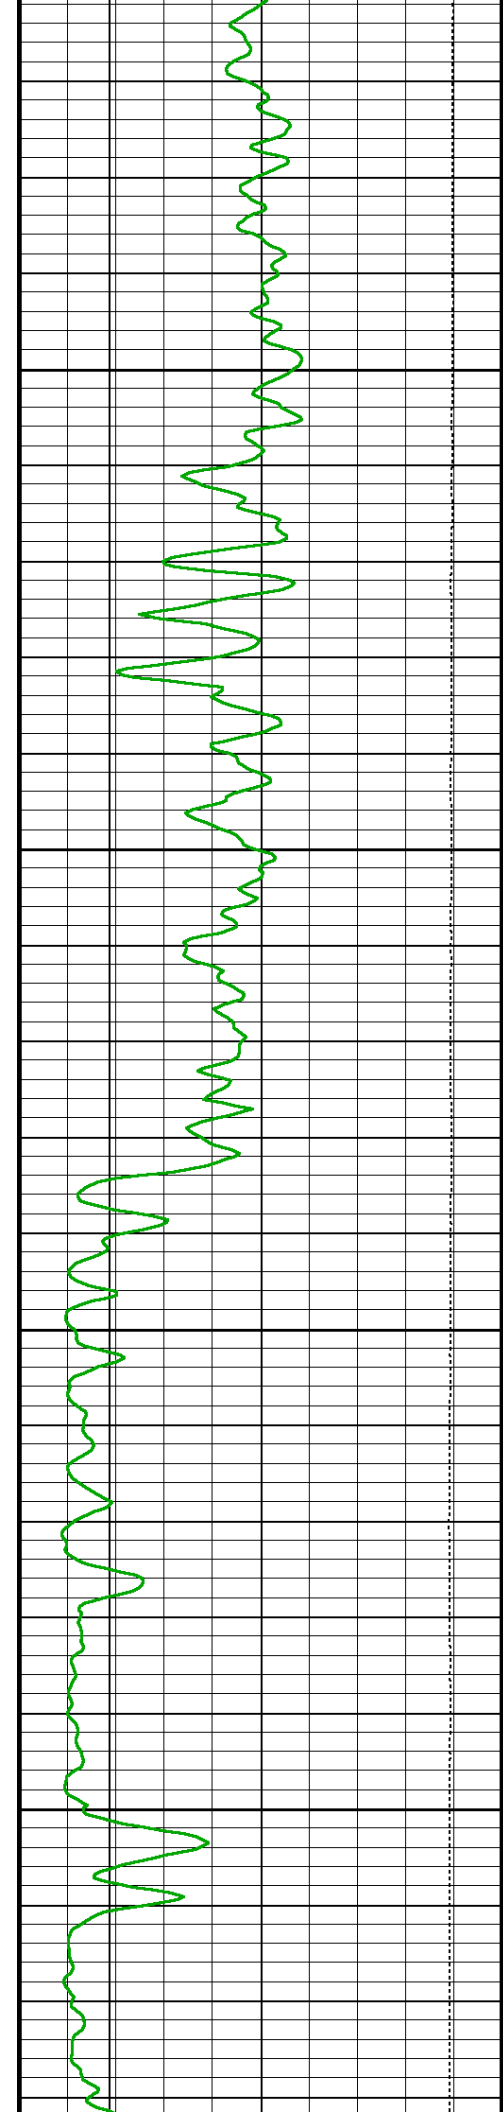



1550

1600

1650

1700

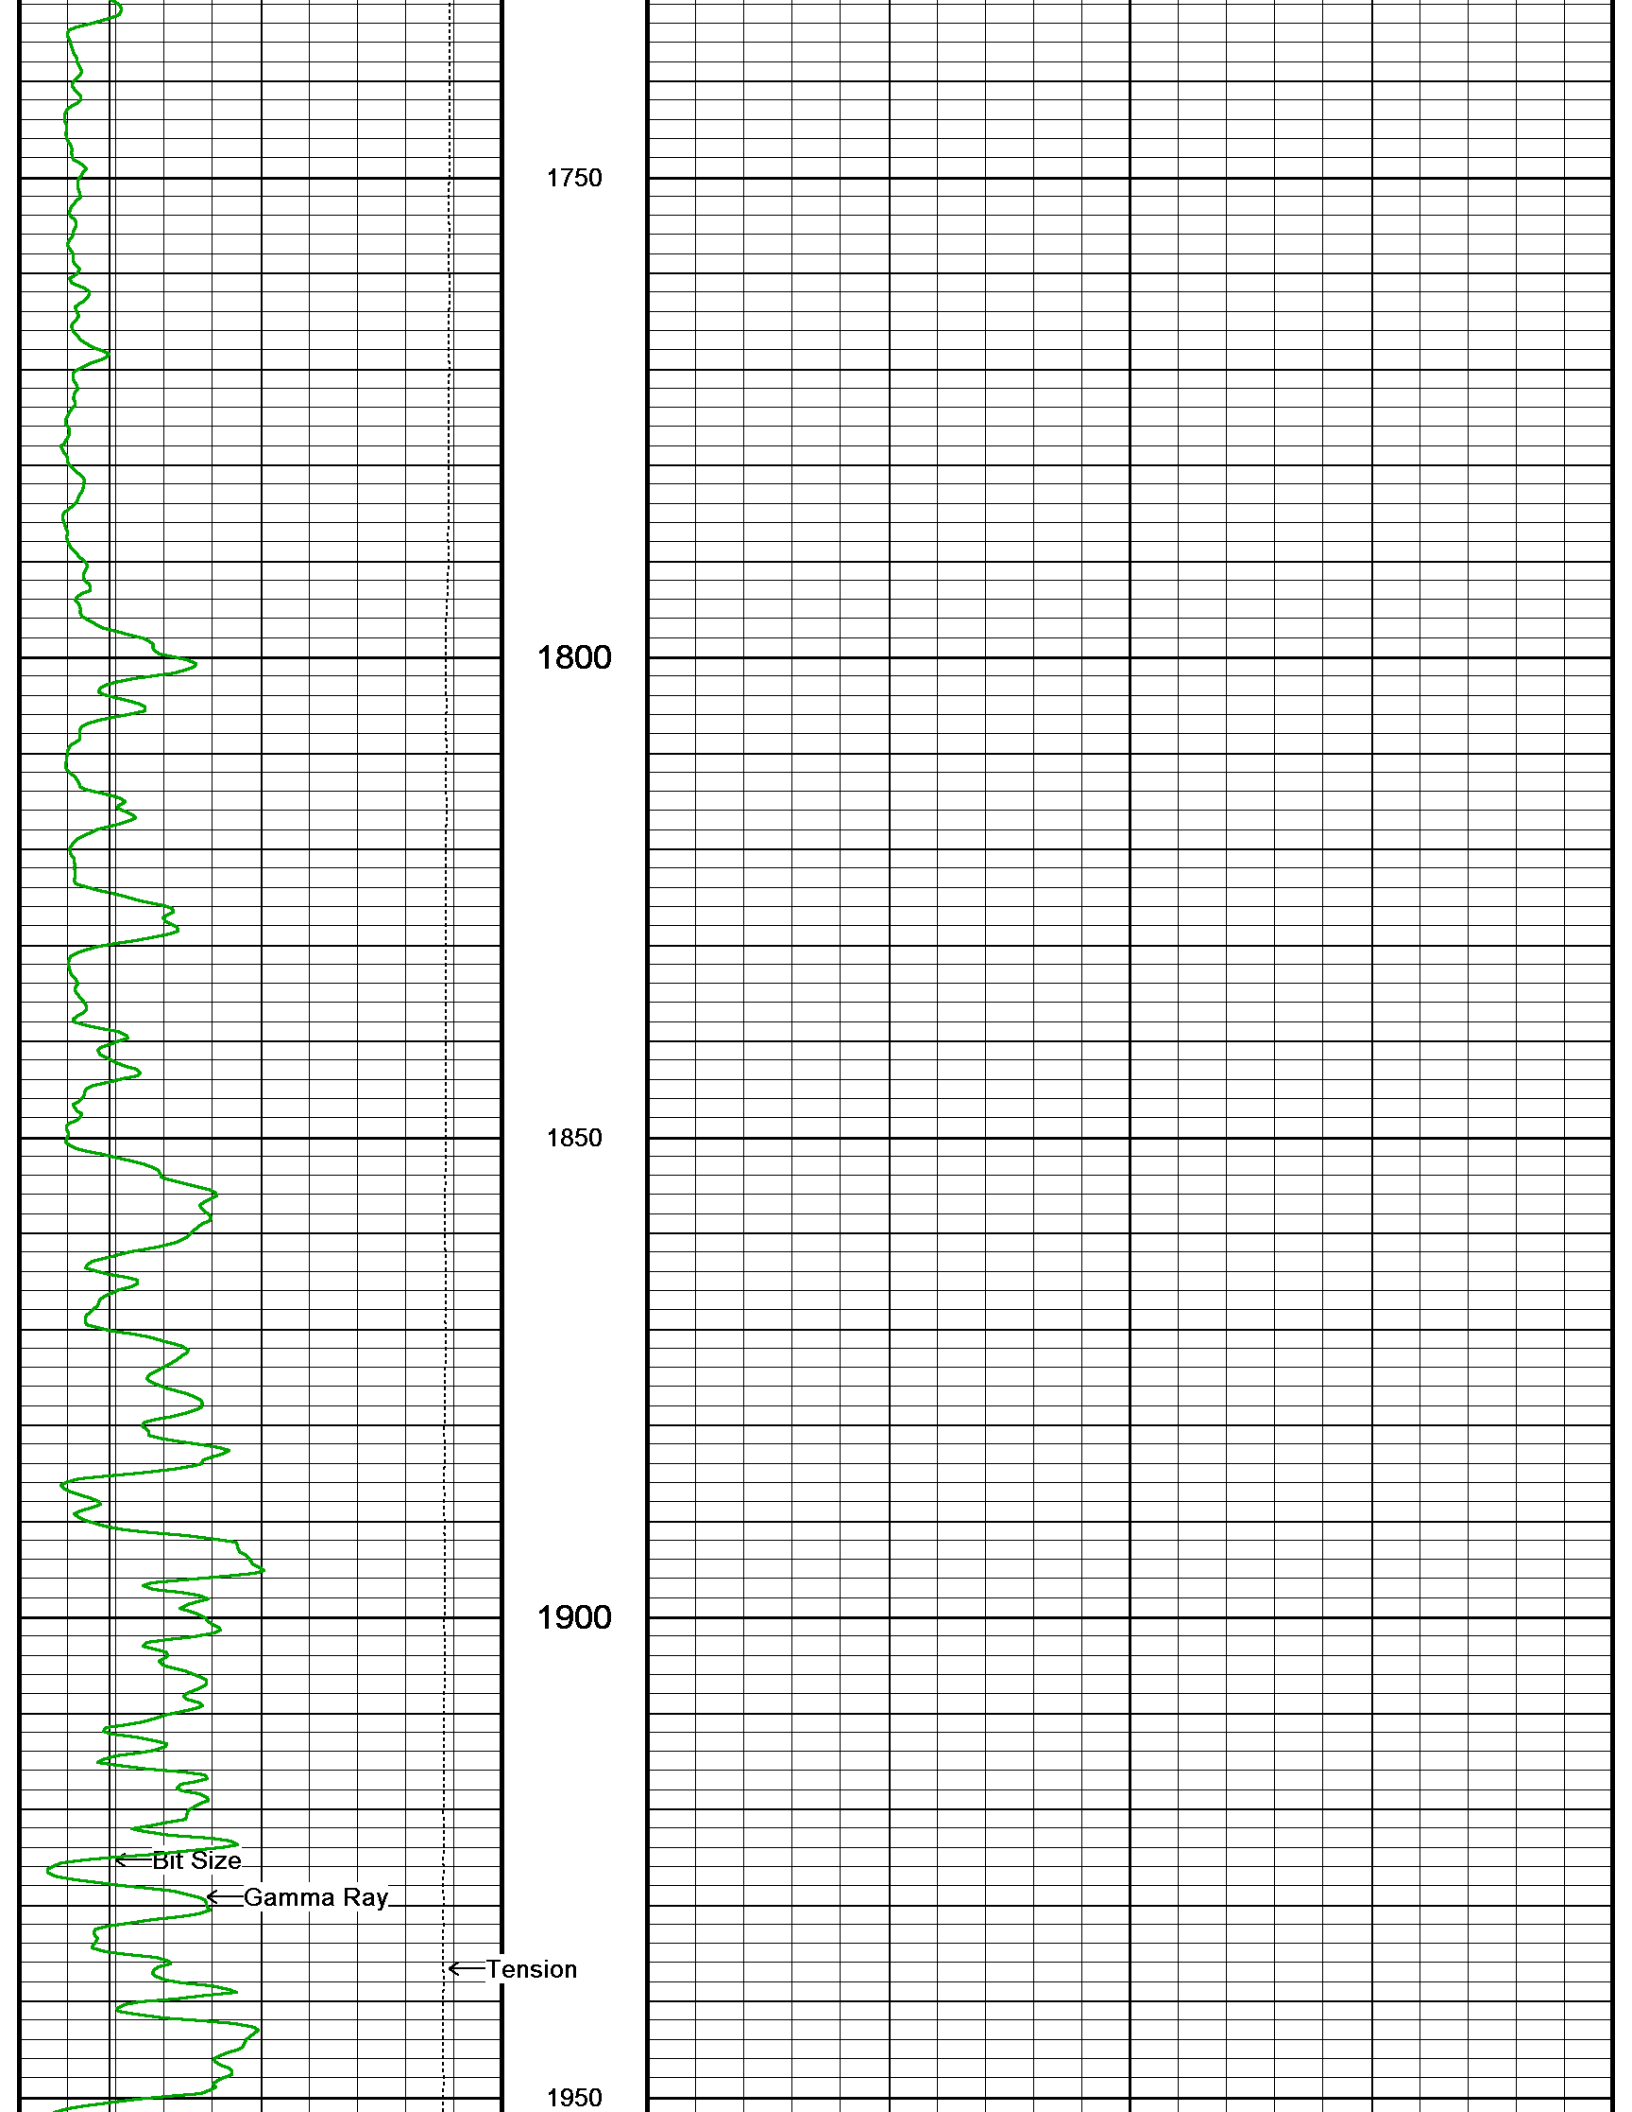

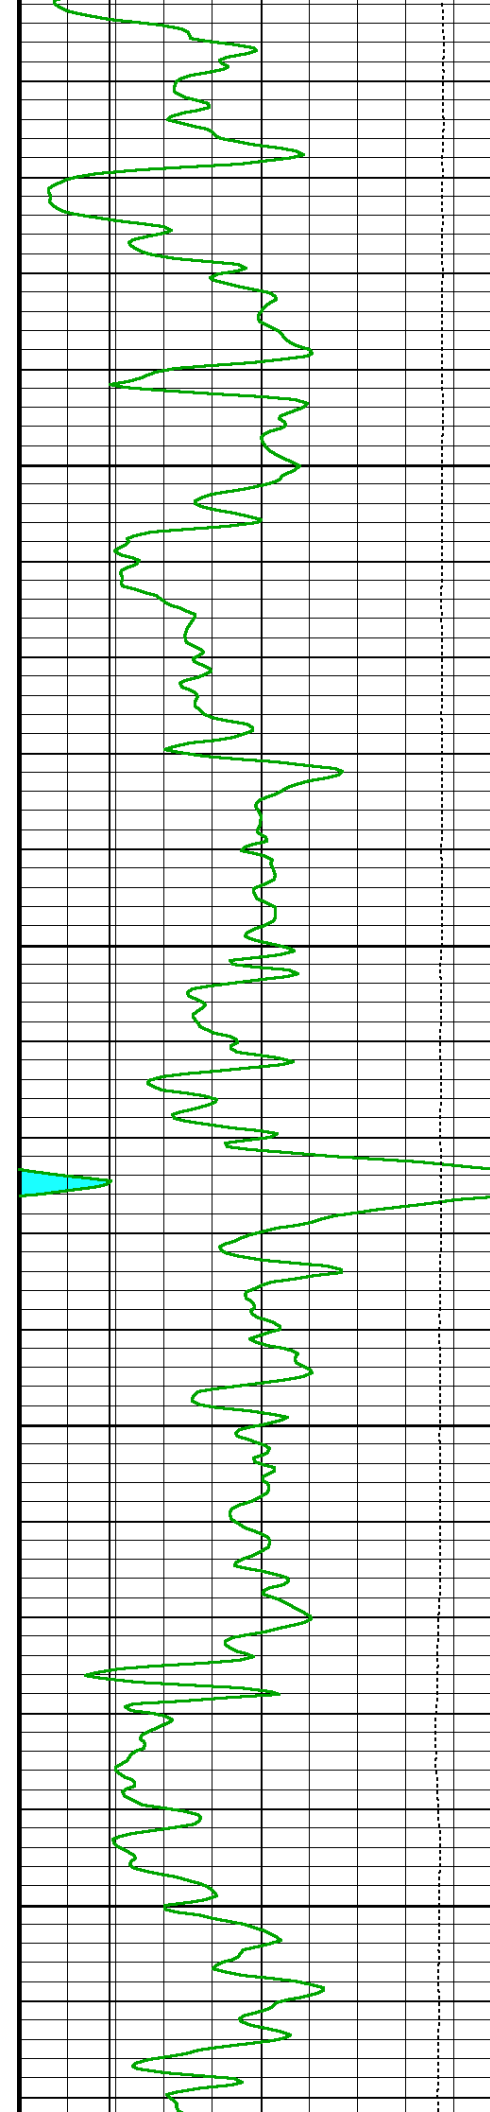


2000

2050

2100

2150

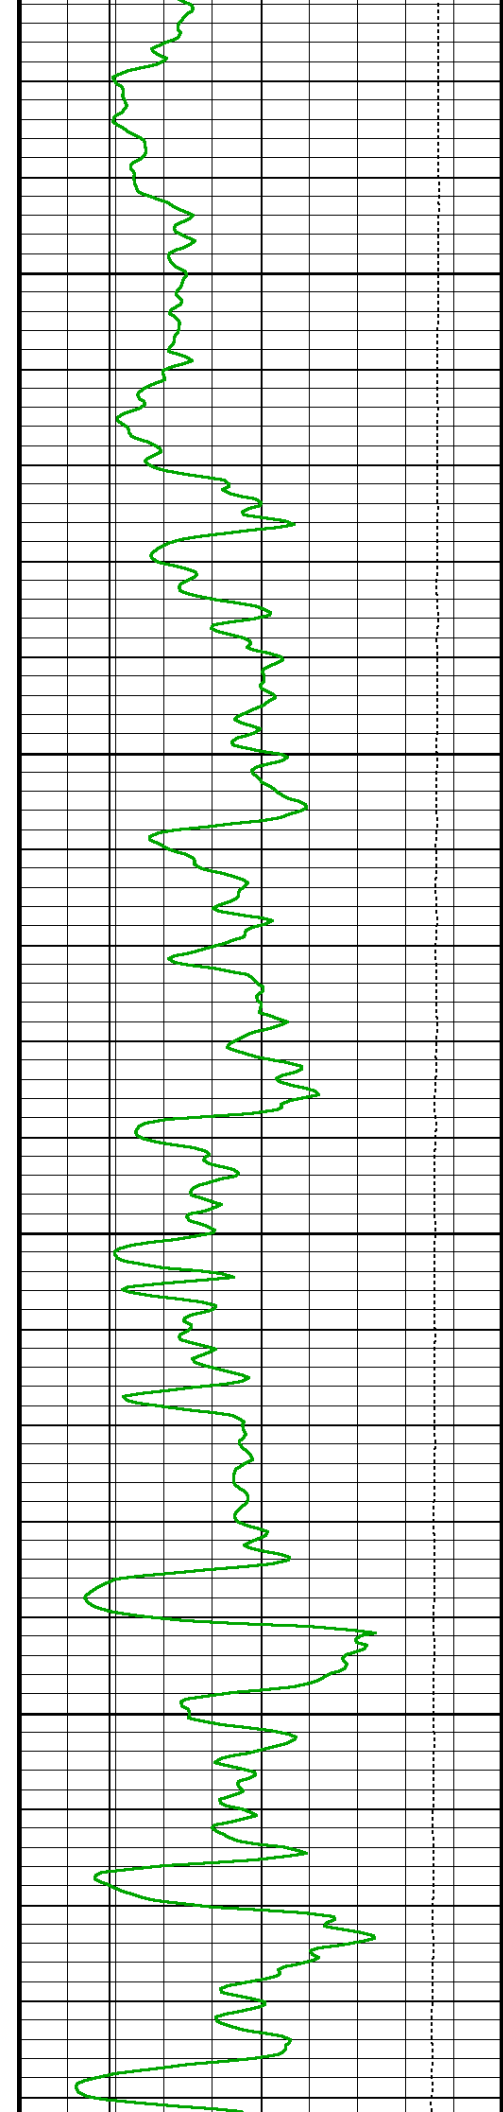


2200

2250

2300

2350

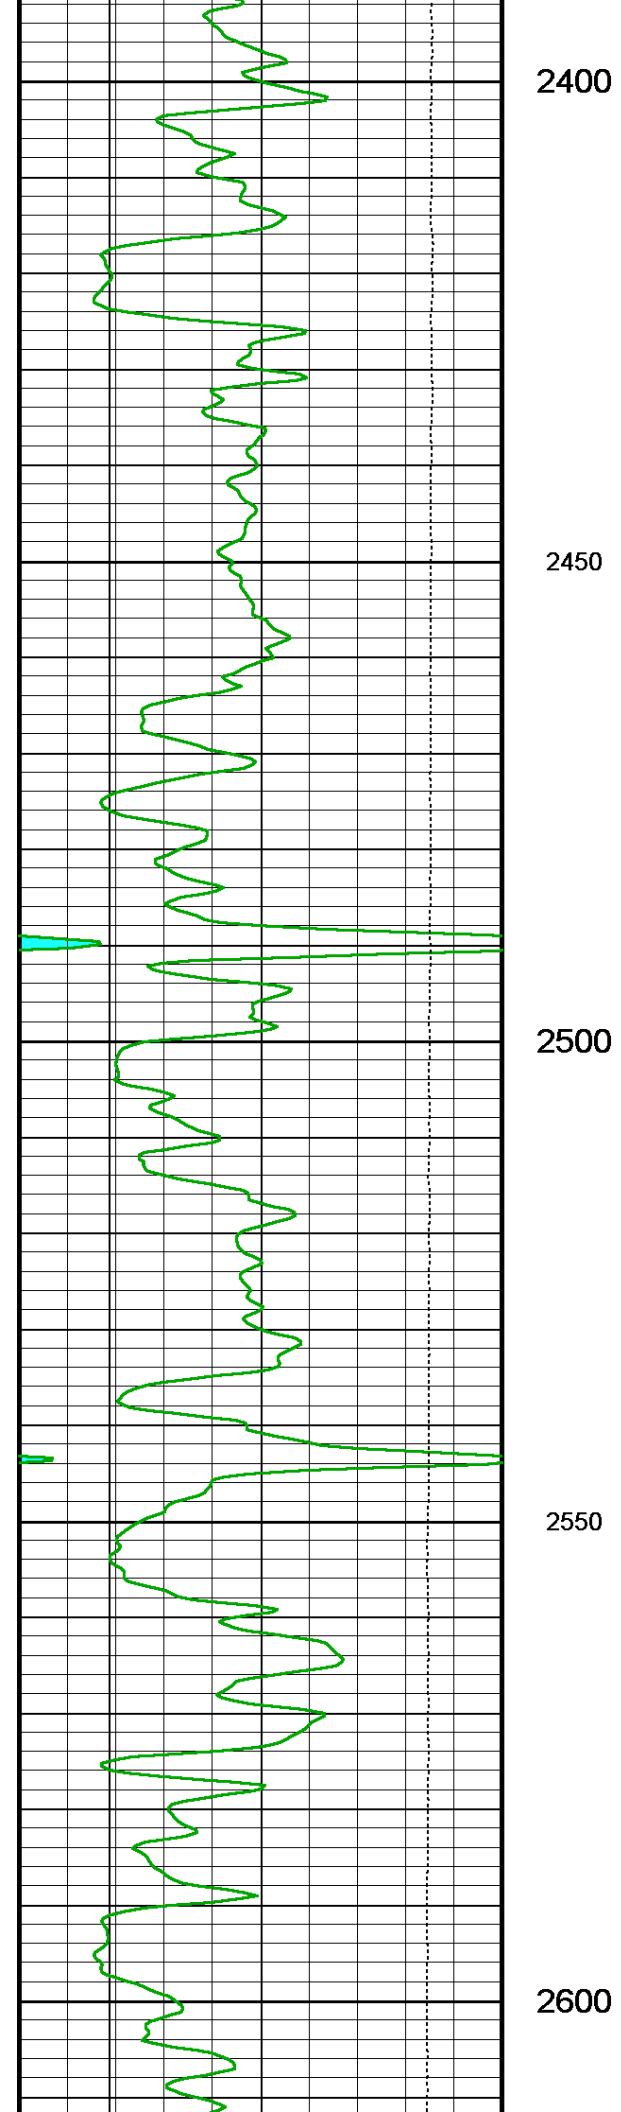


2400

2450

2500

2550

2600

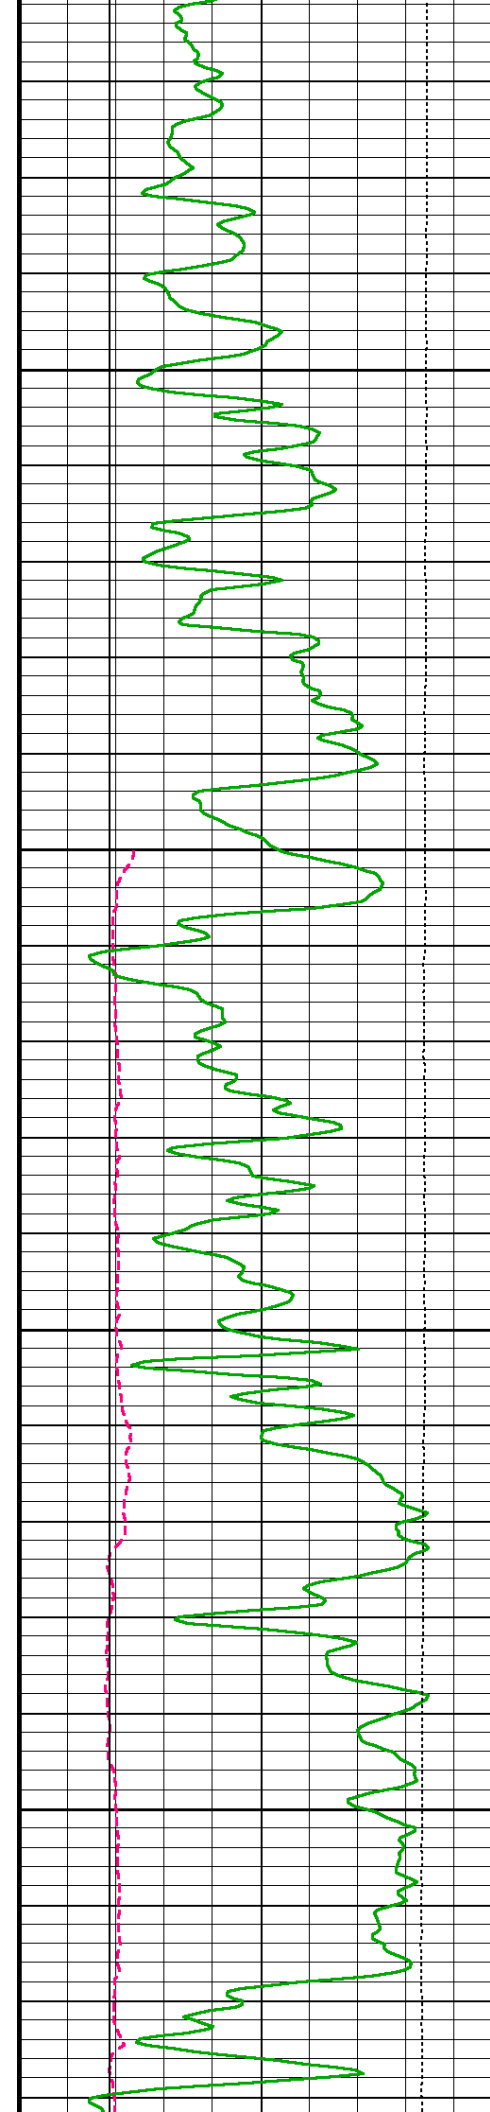



2650

2700


2750


2800

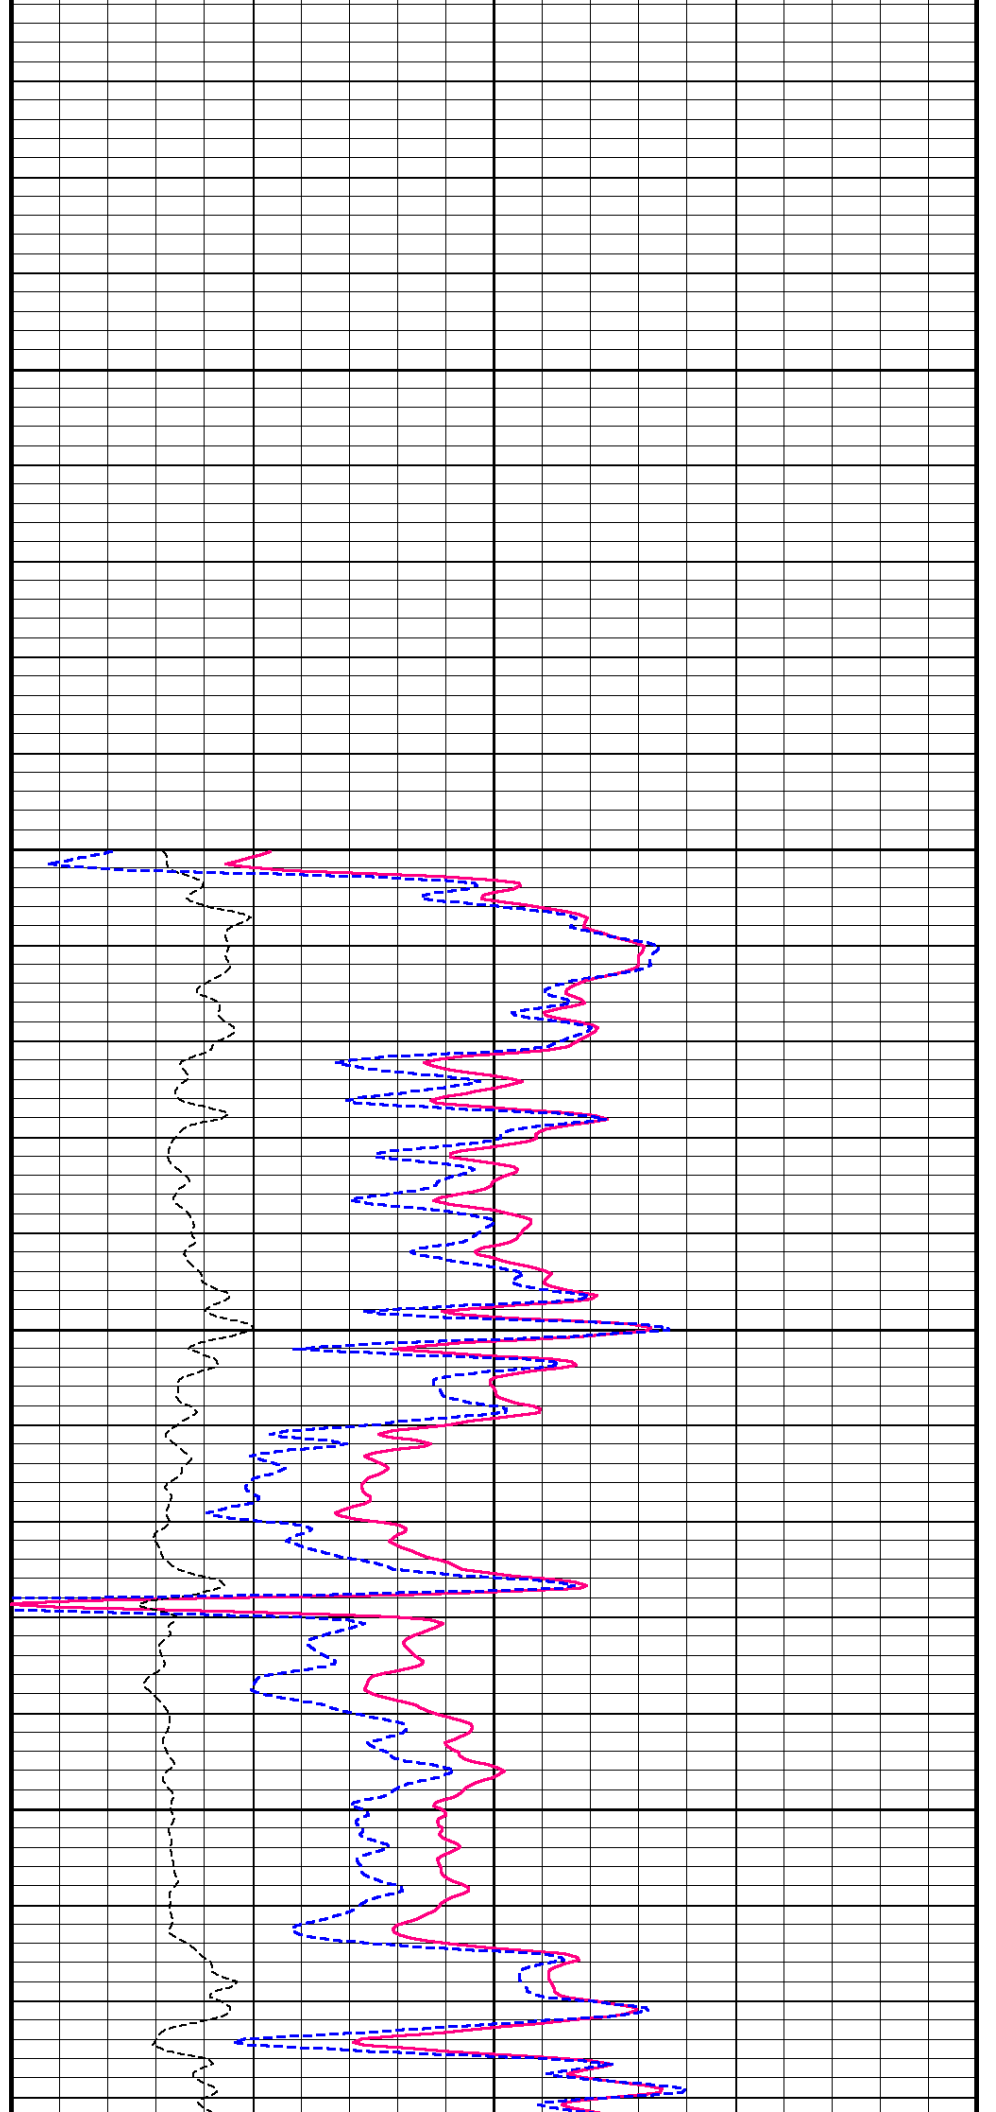

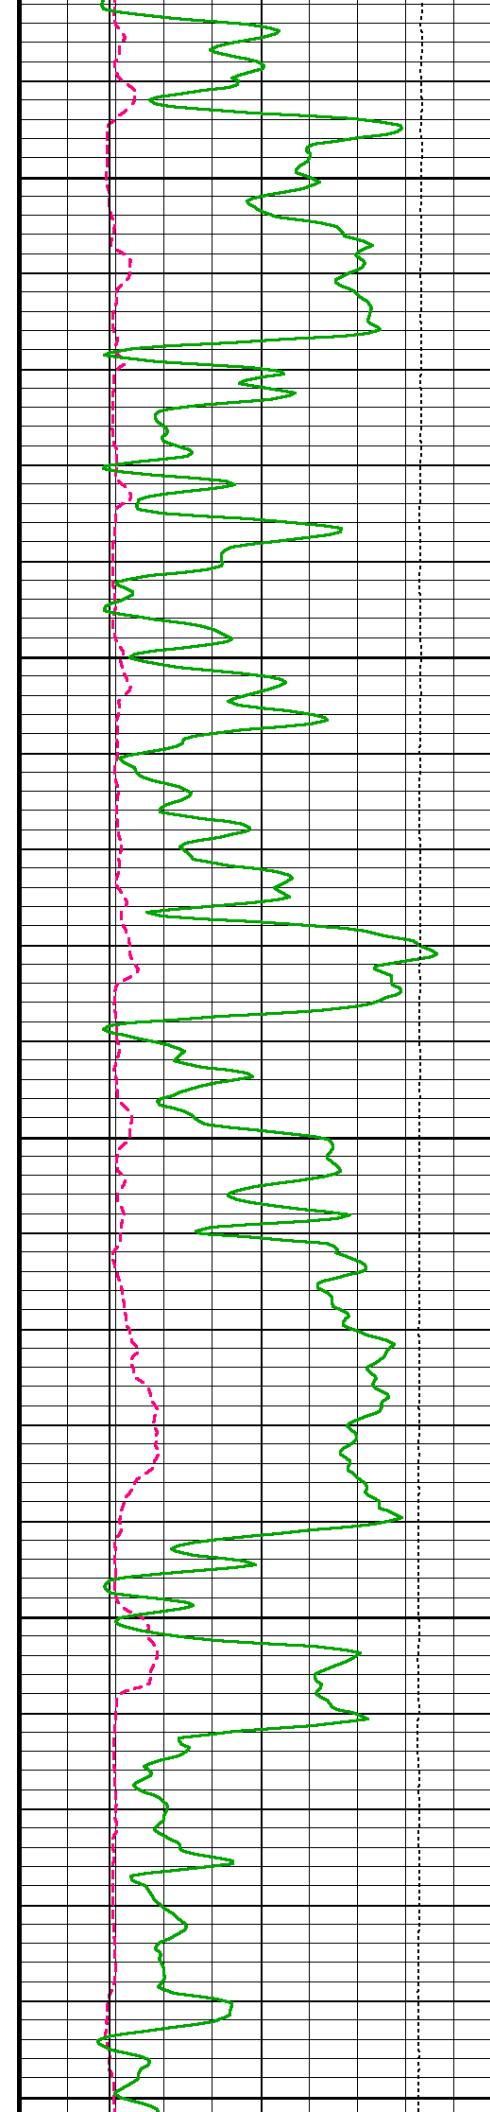

2850
2900
2950
3000
3050

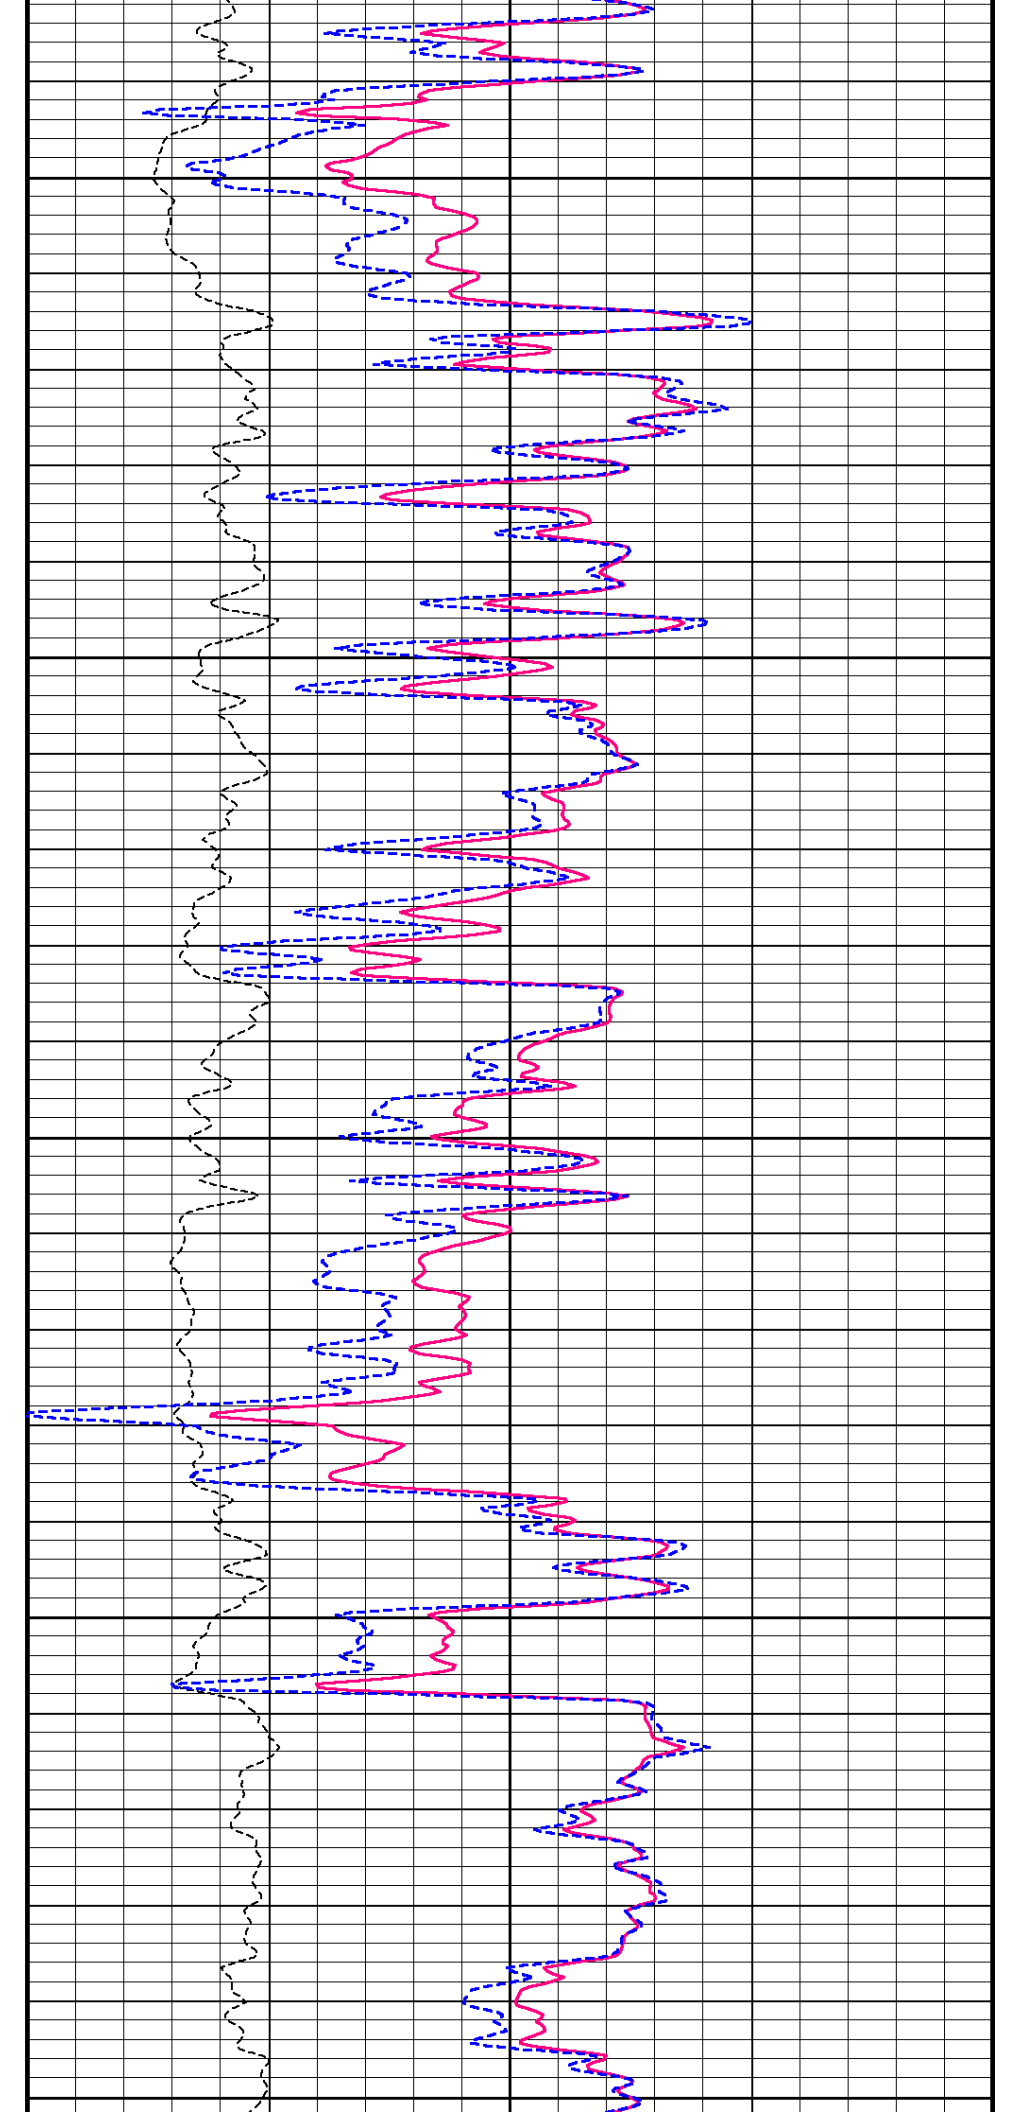

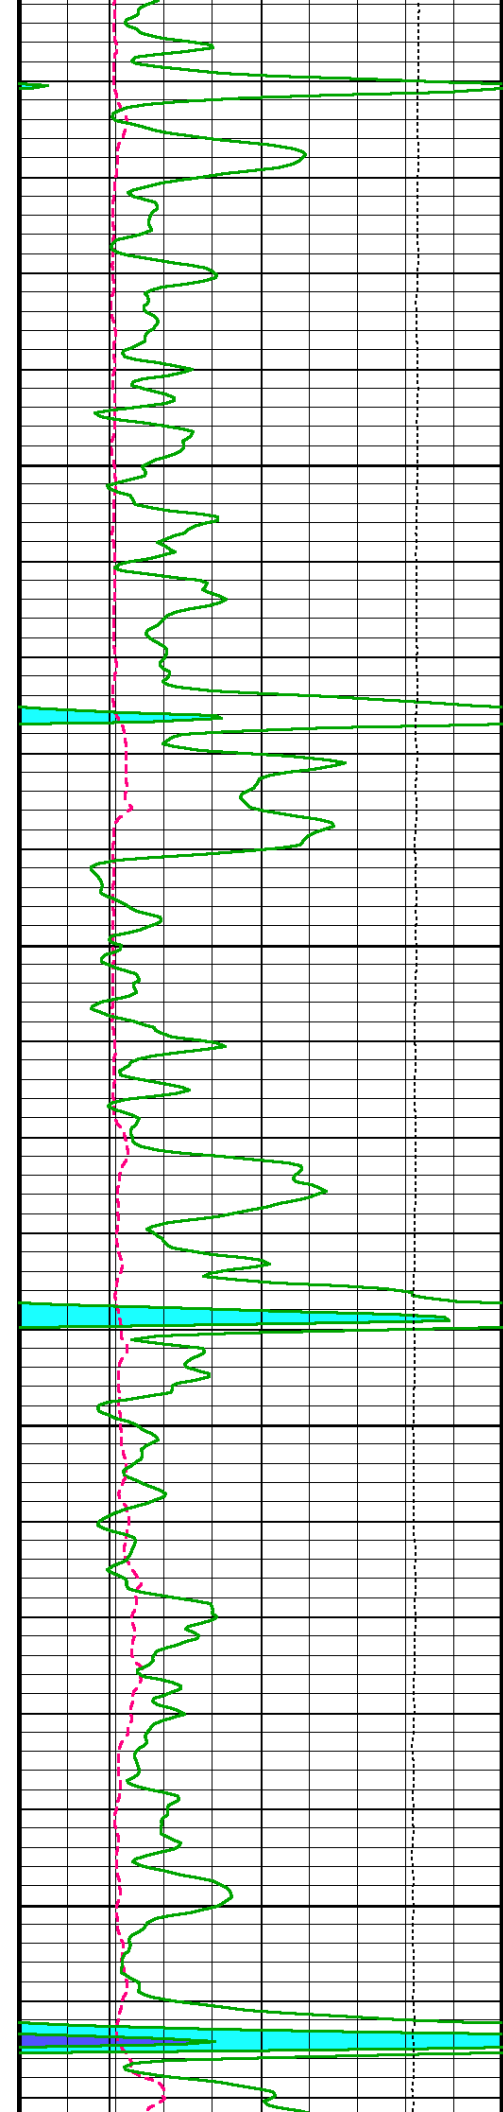



3100

3150

3200

3250

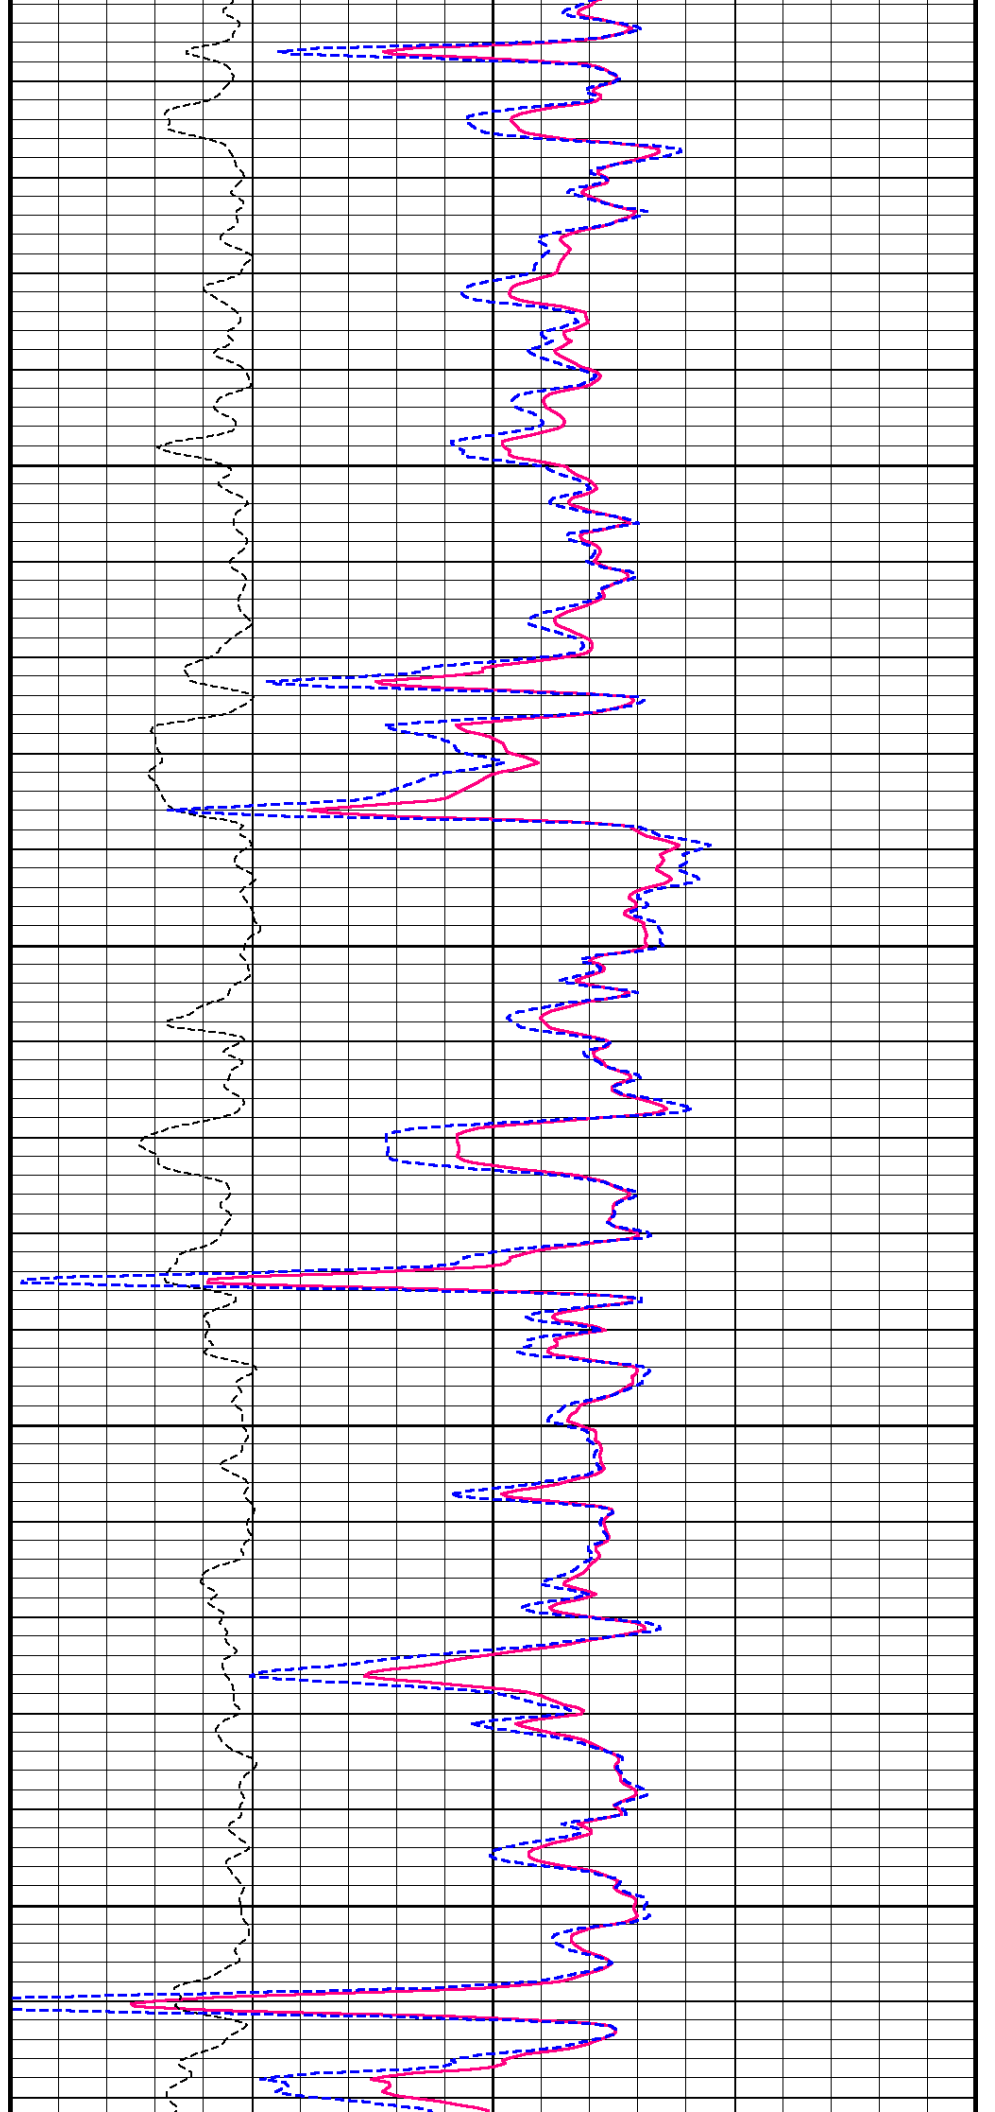

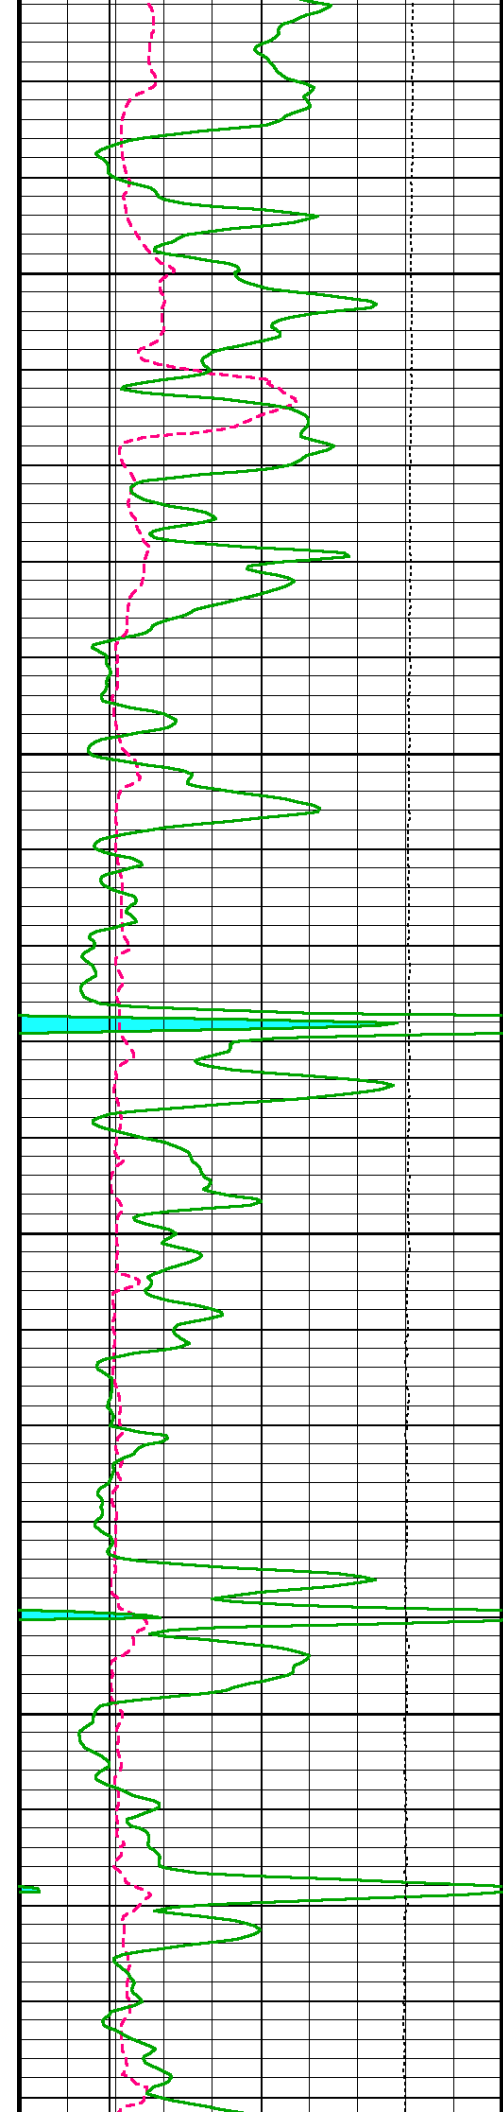



3300

3350

3400

3450

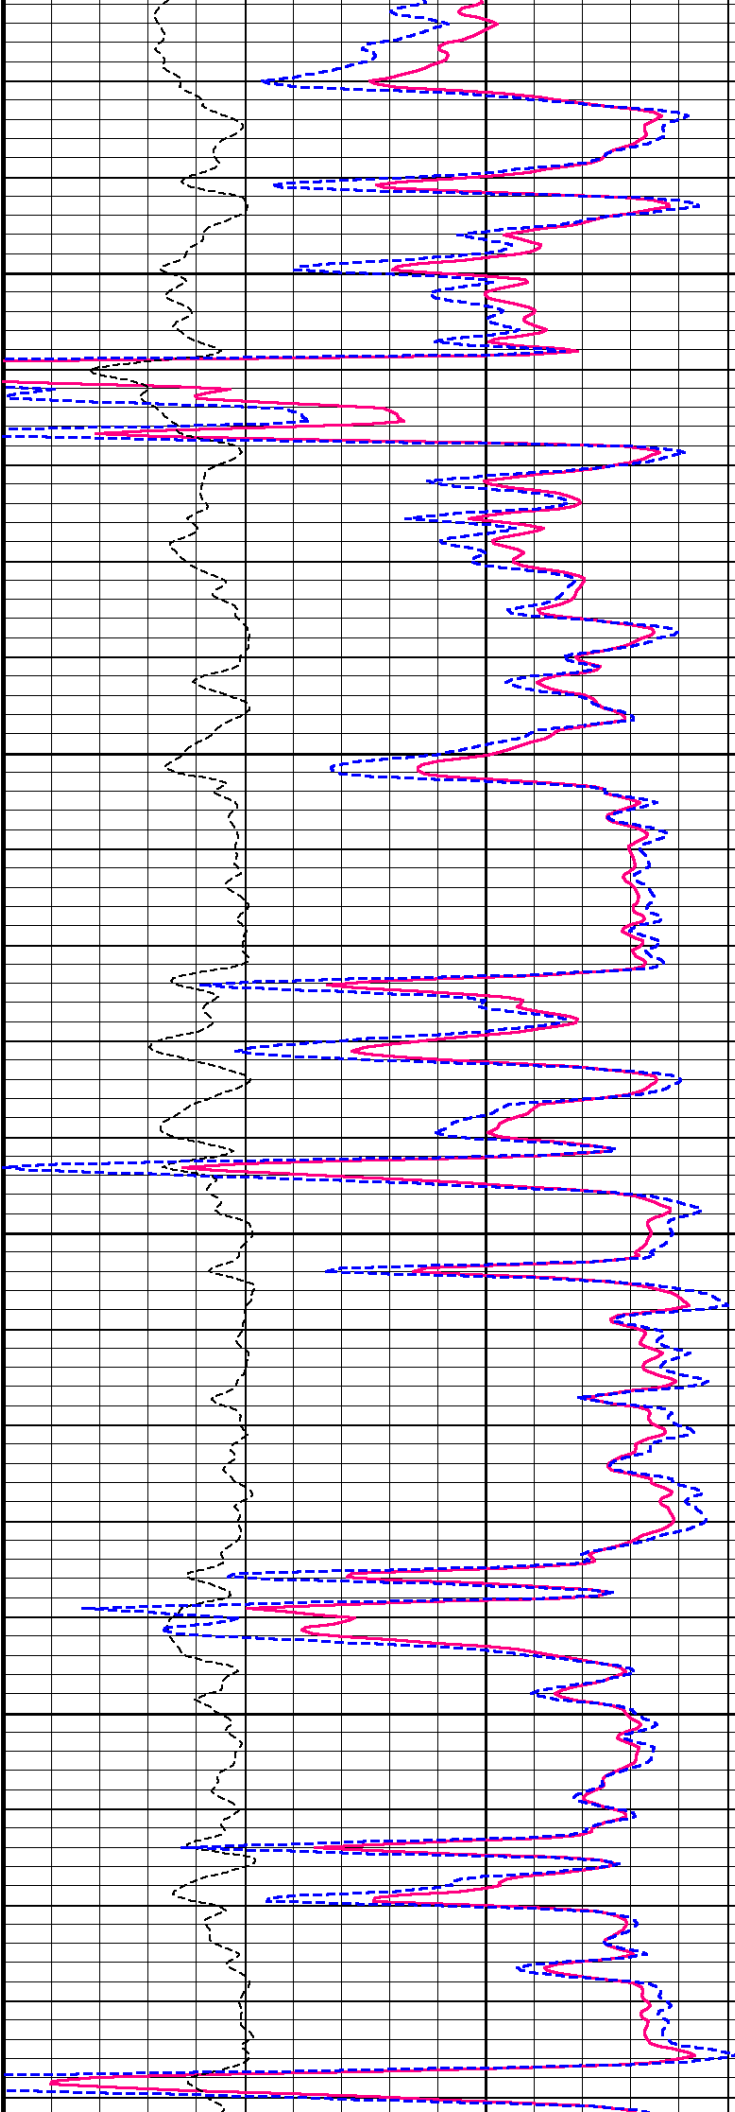

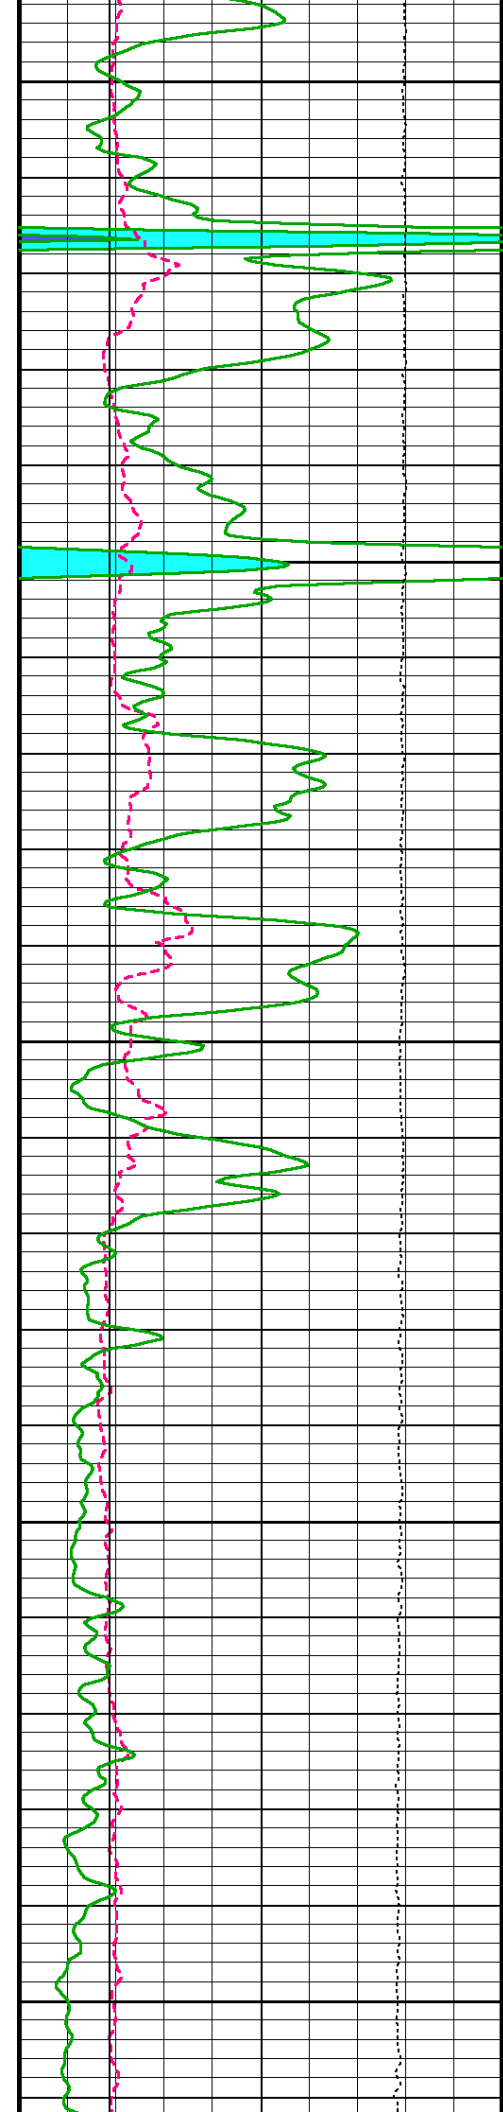


3500


3550


3600


3650

3700

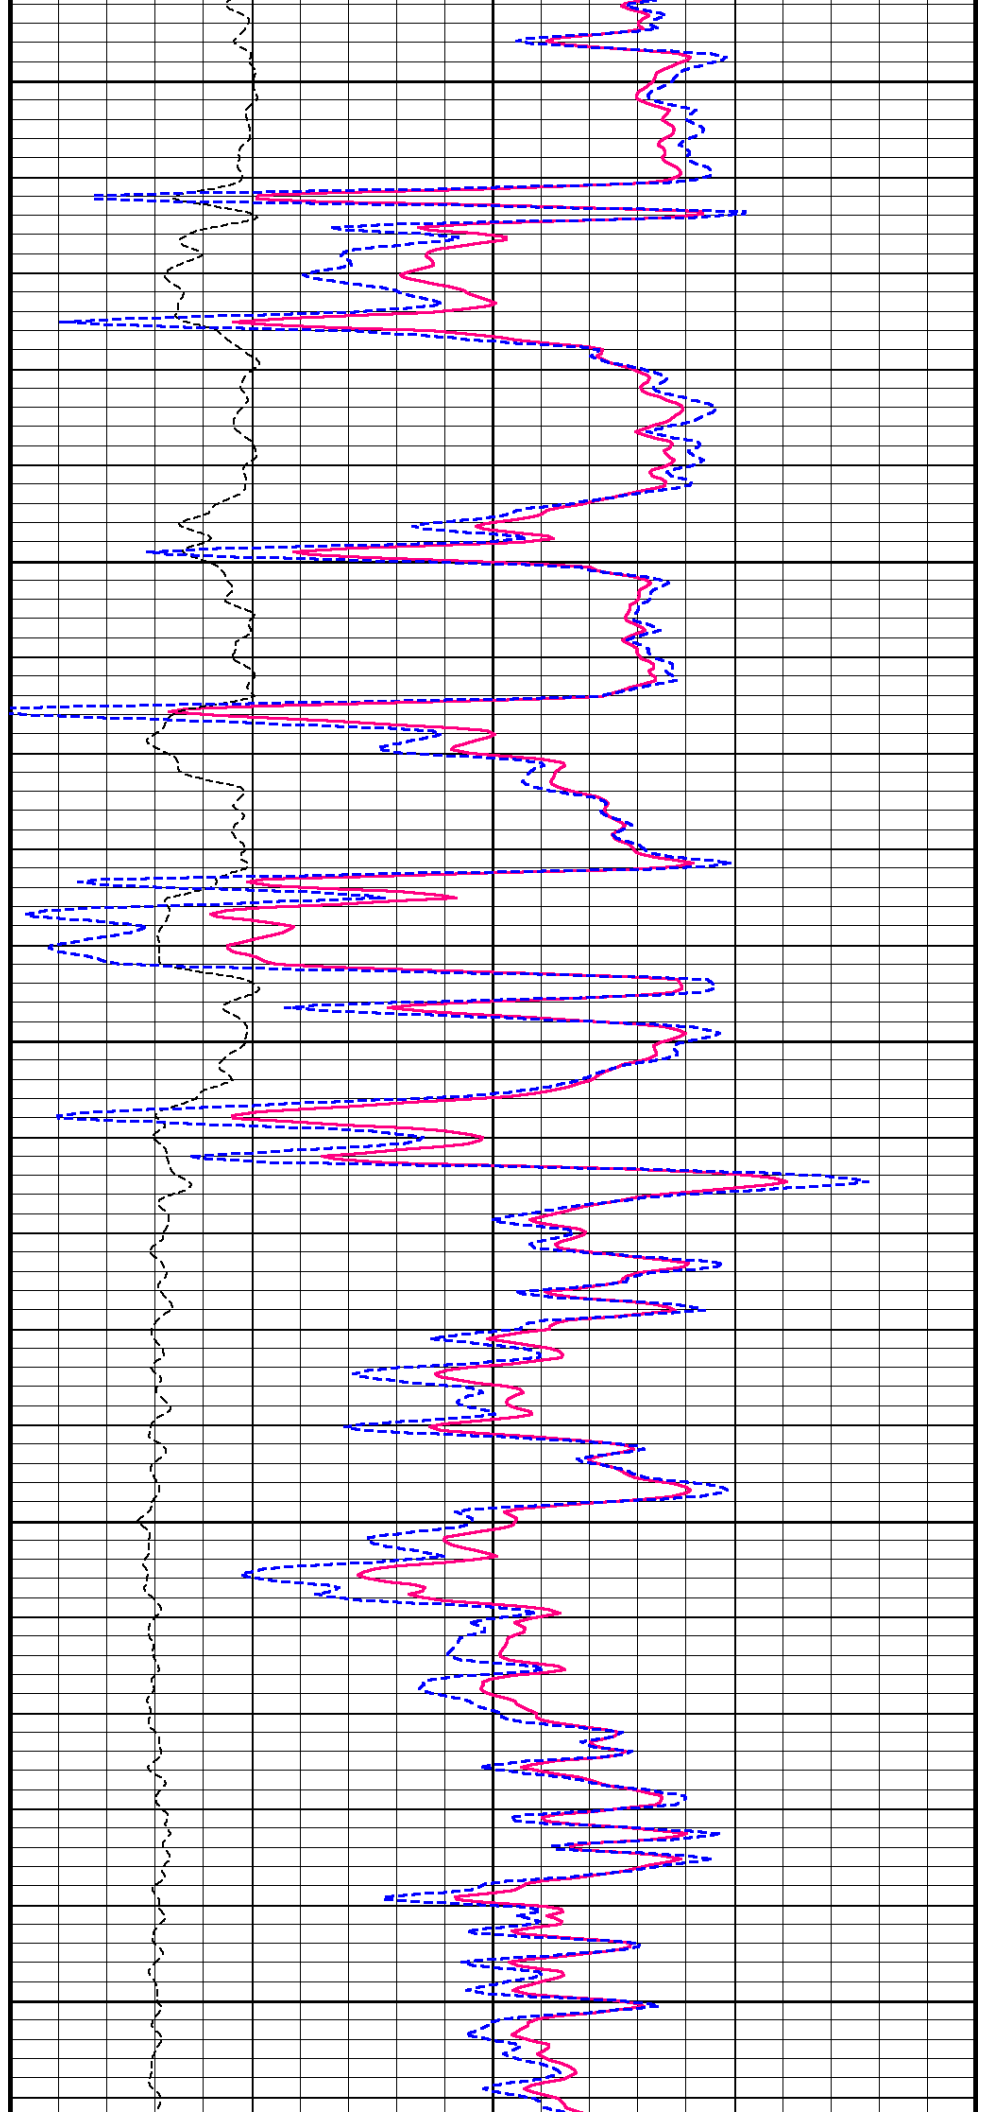

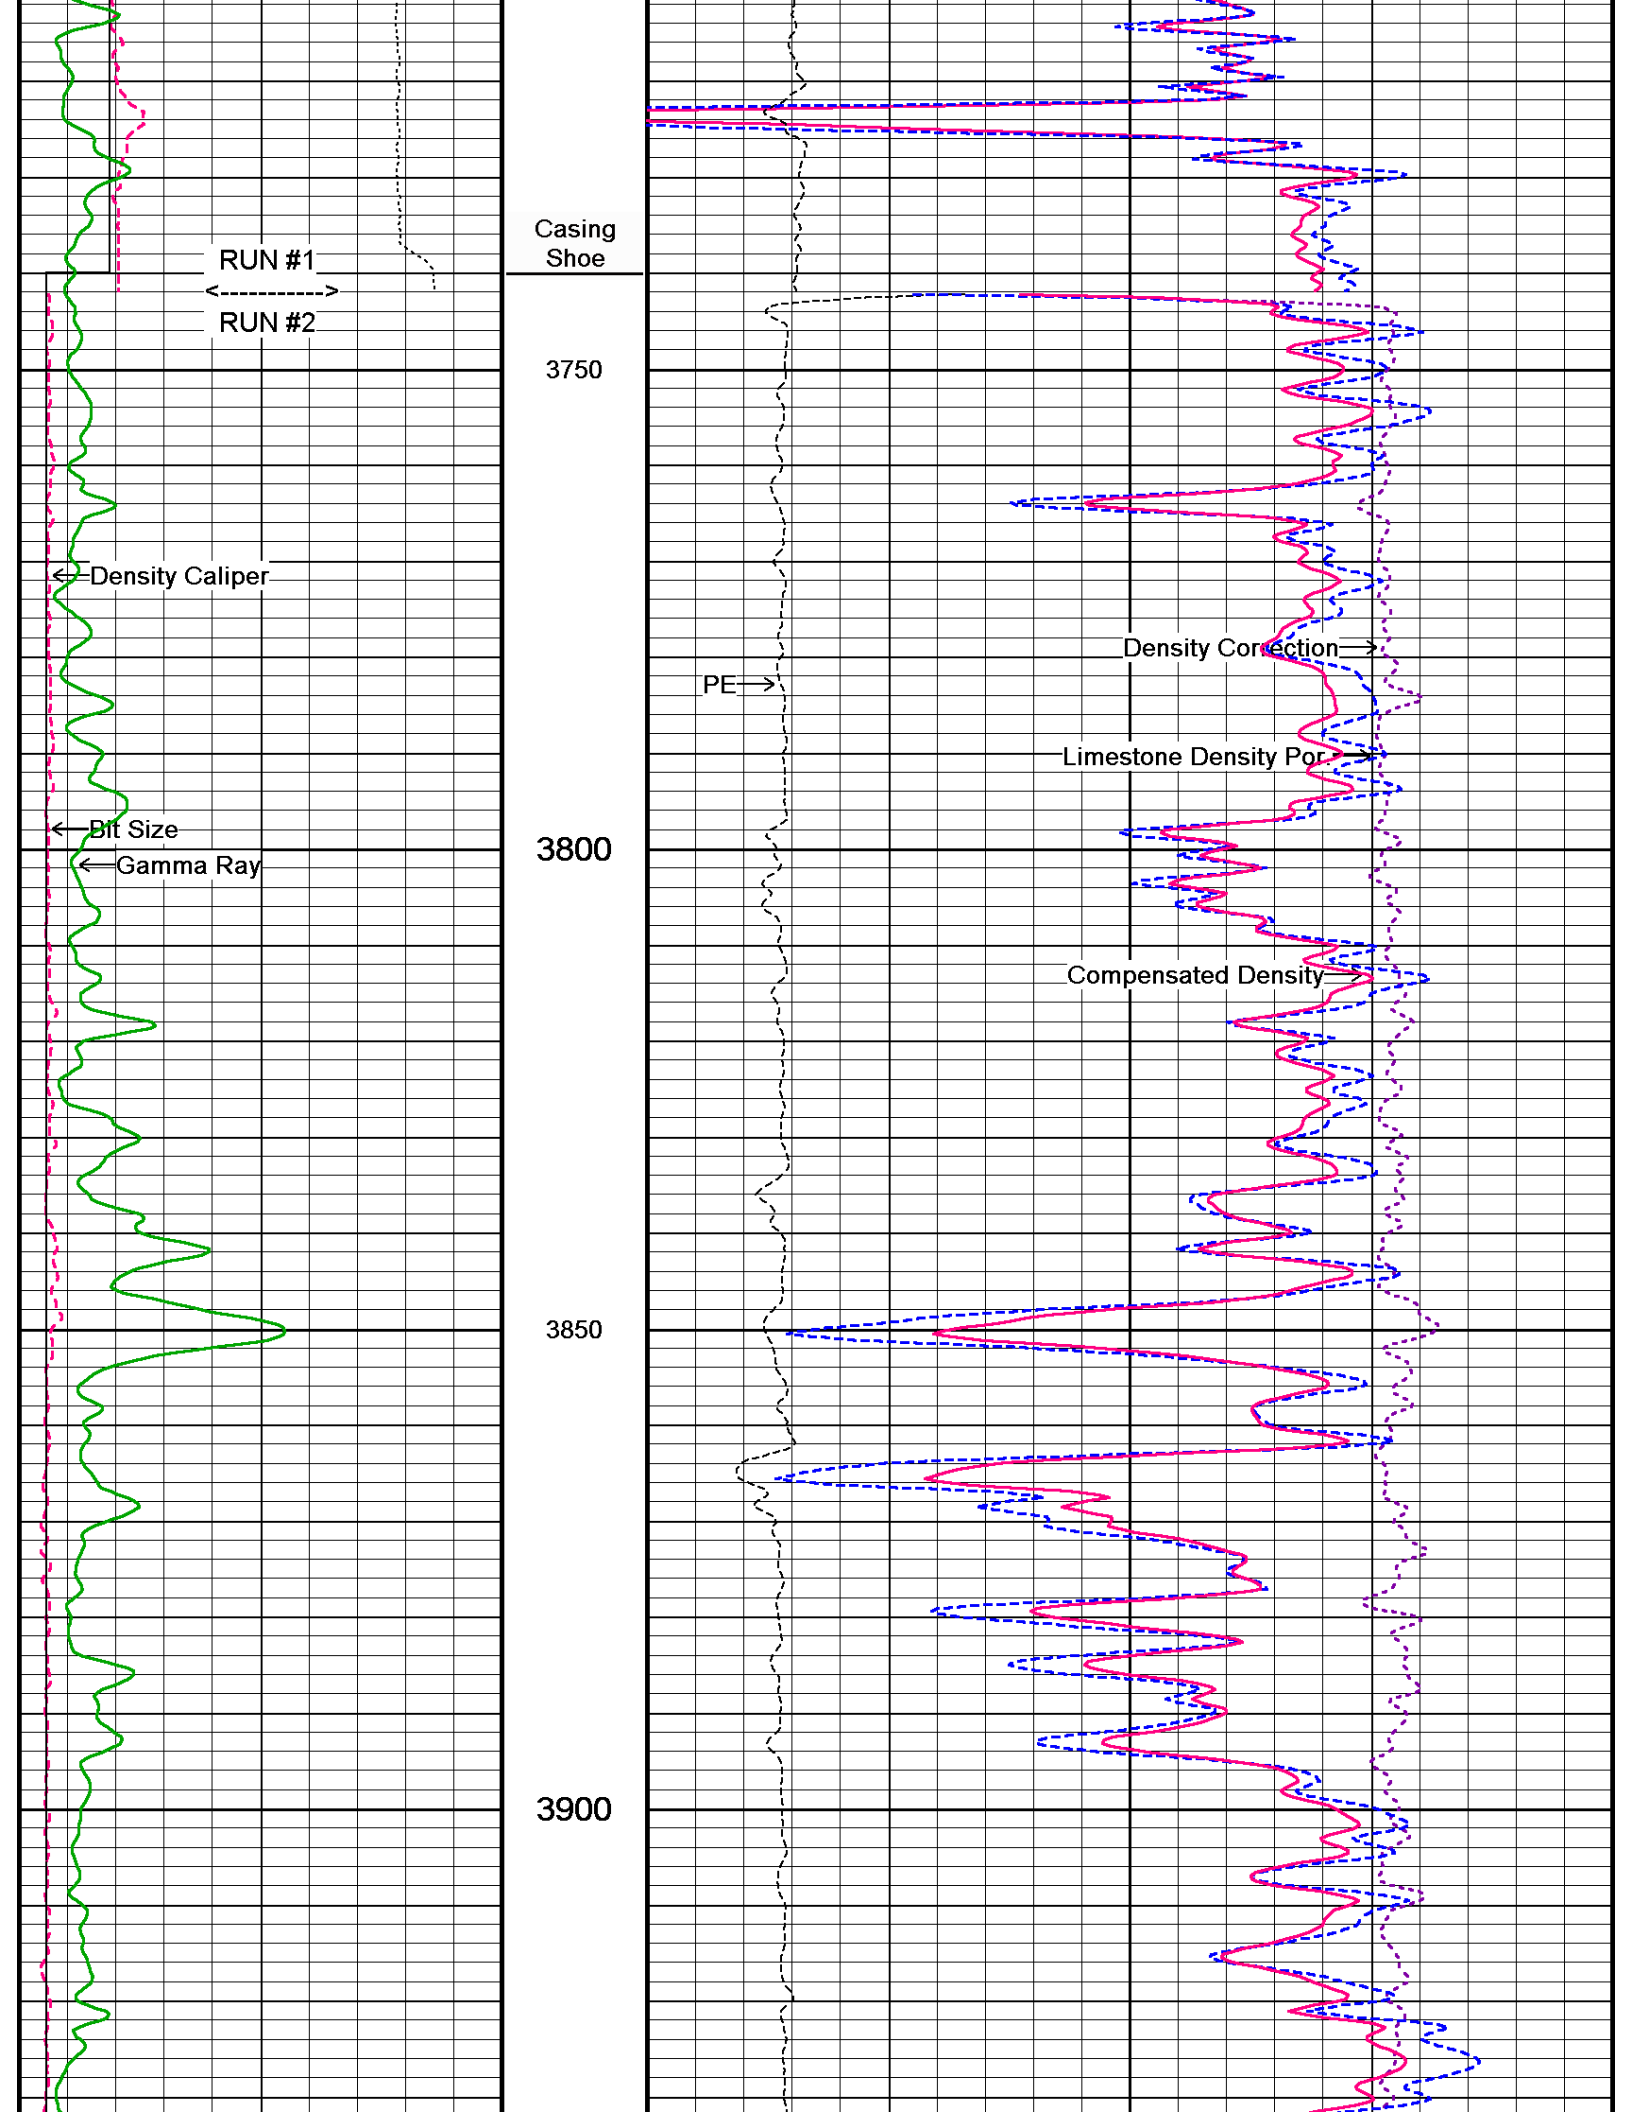

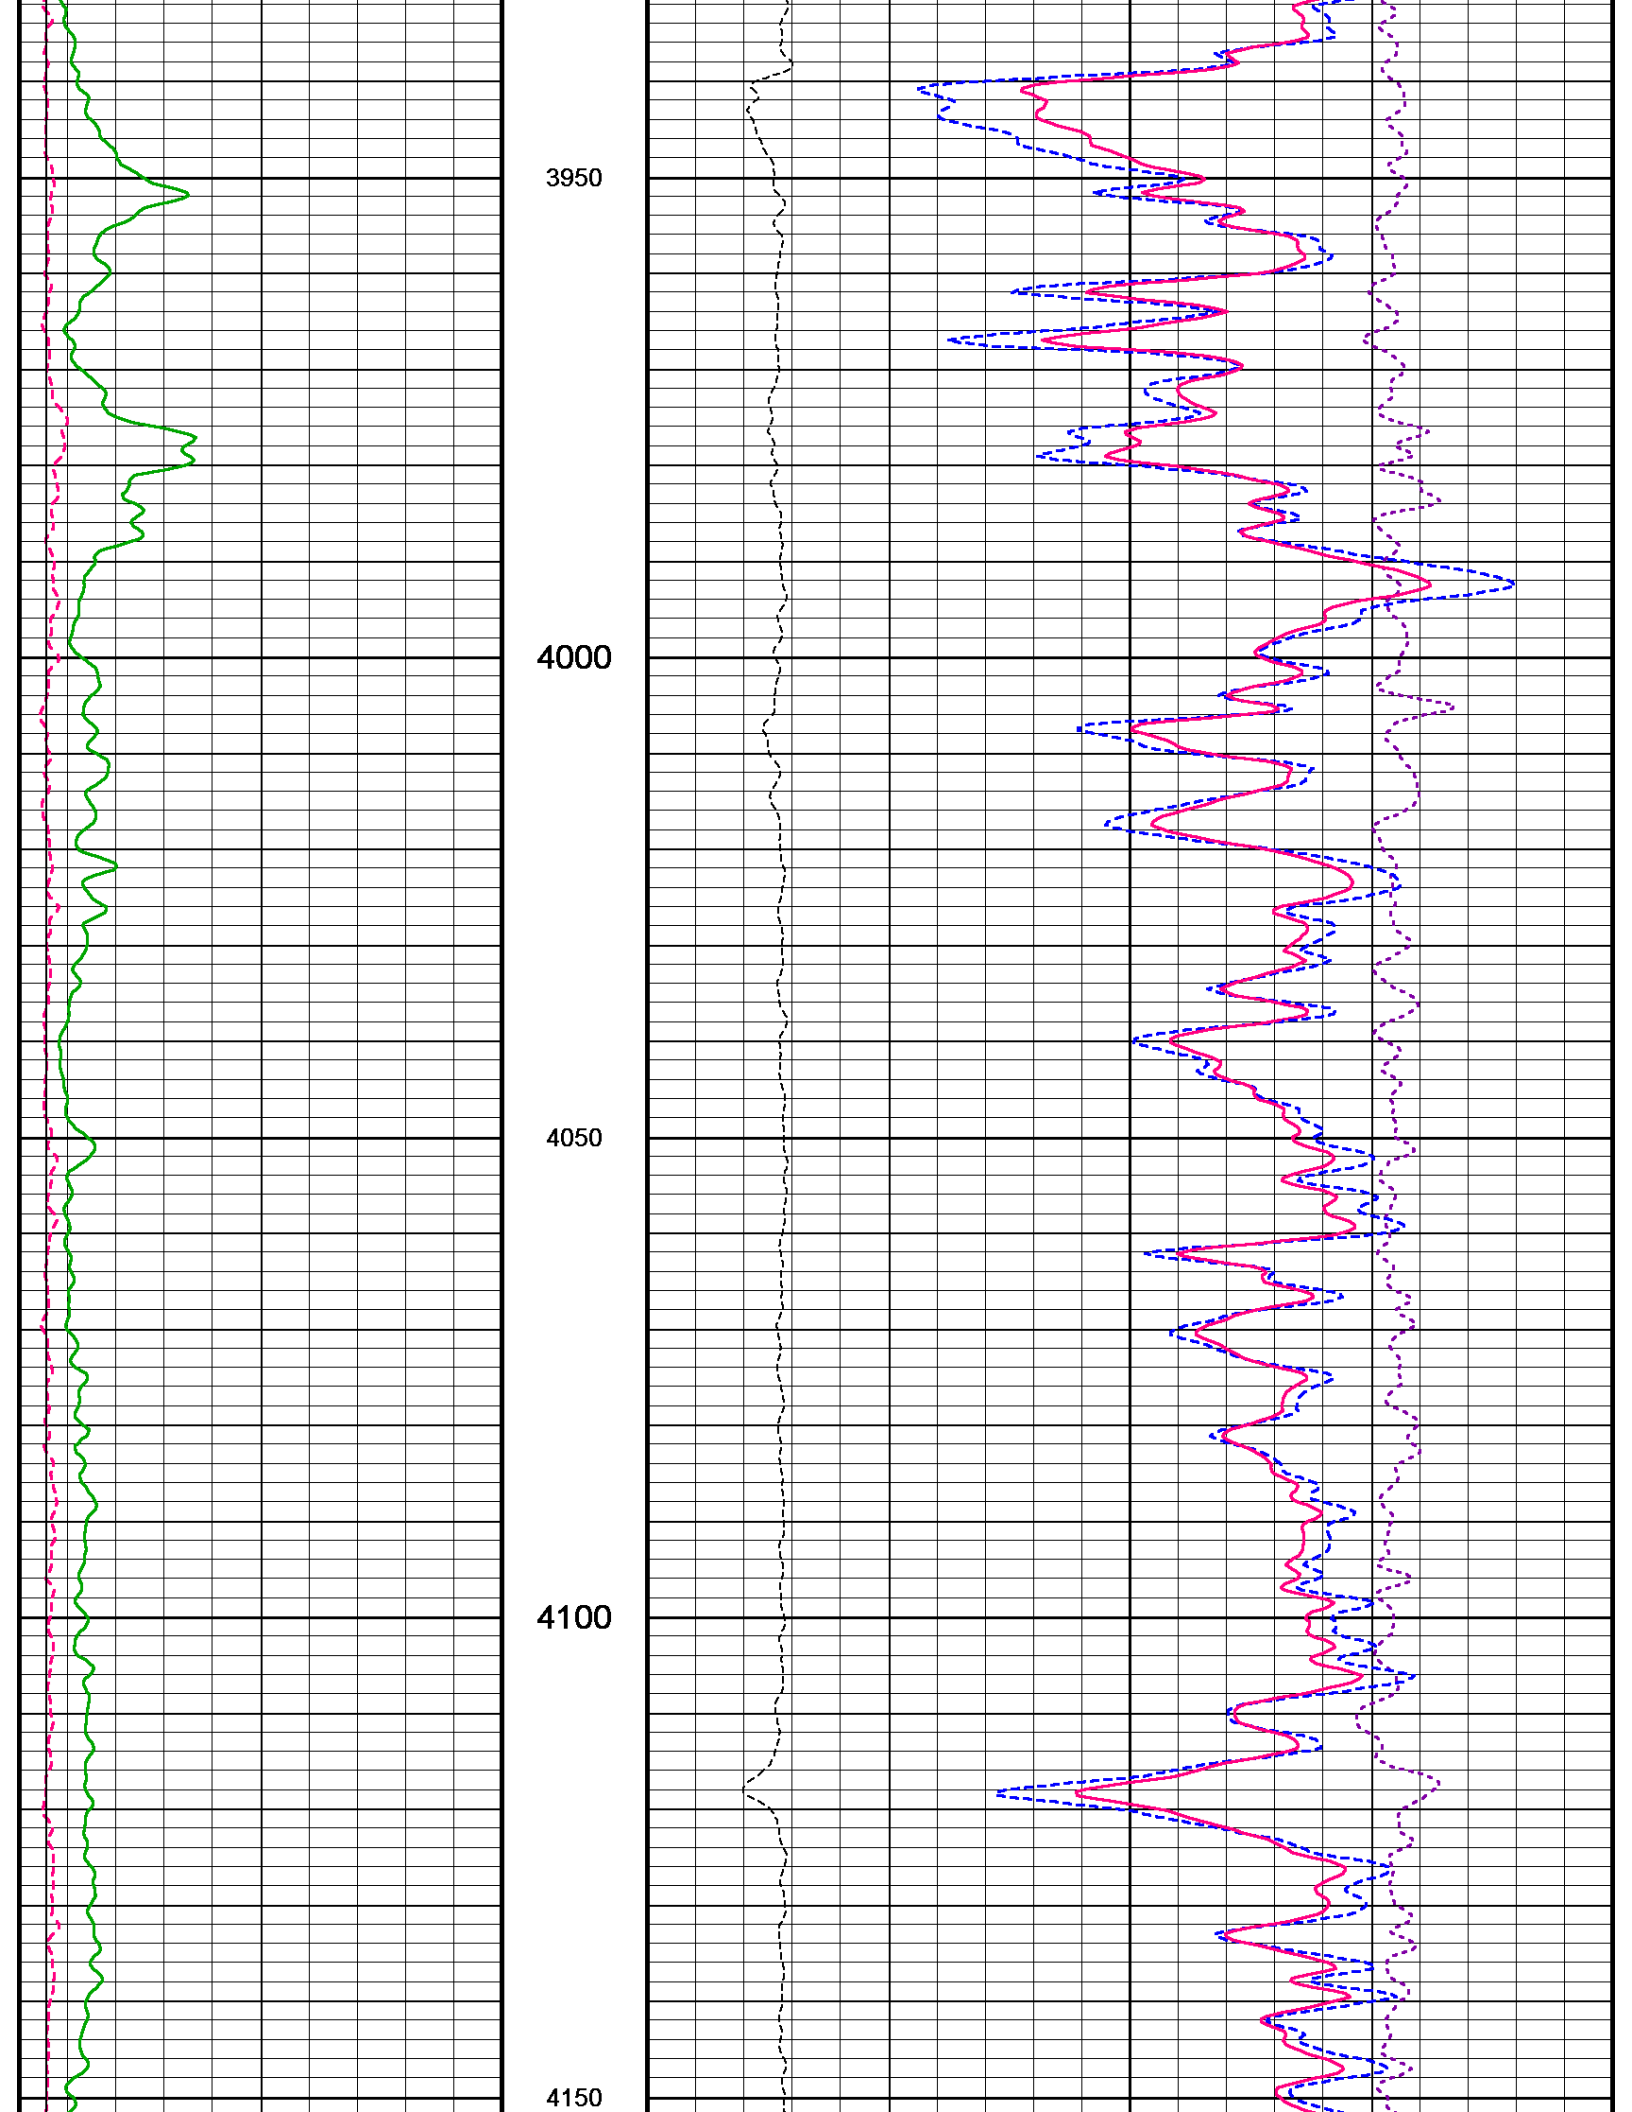

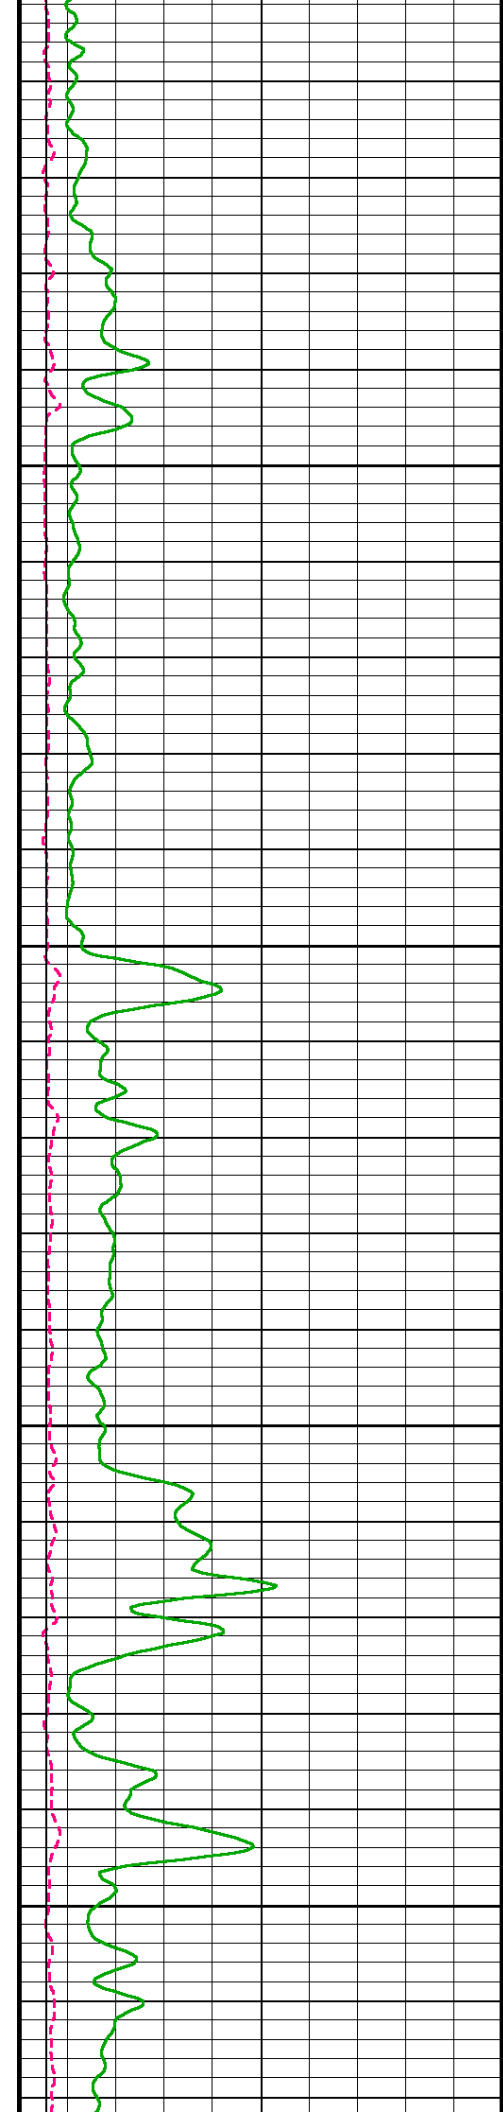



4200

4250

4300

4350

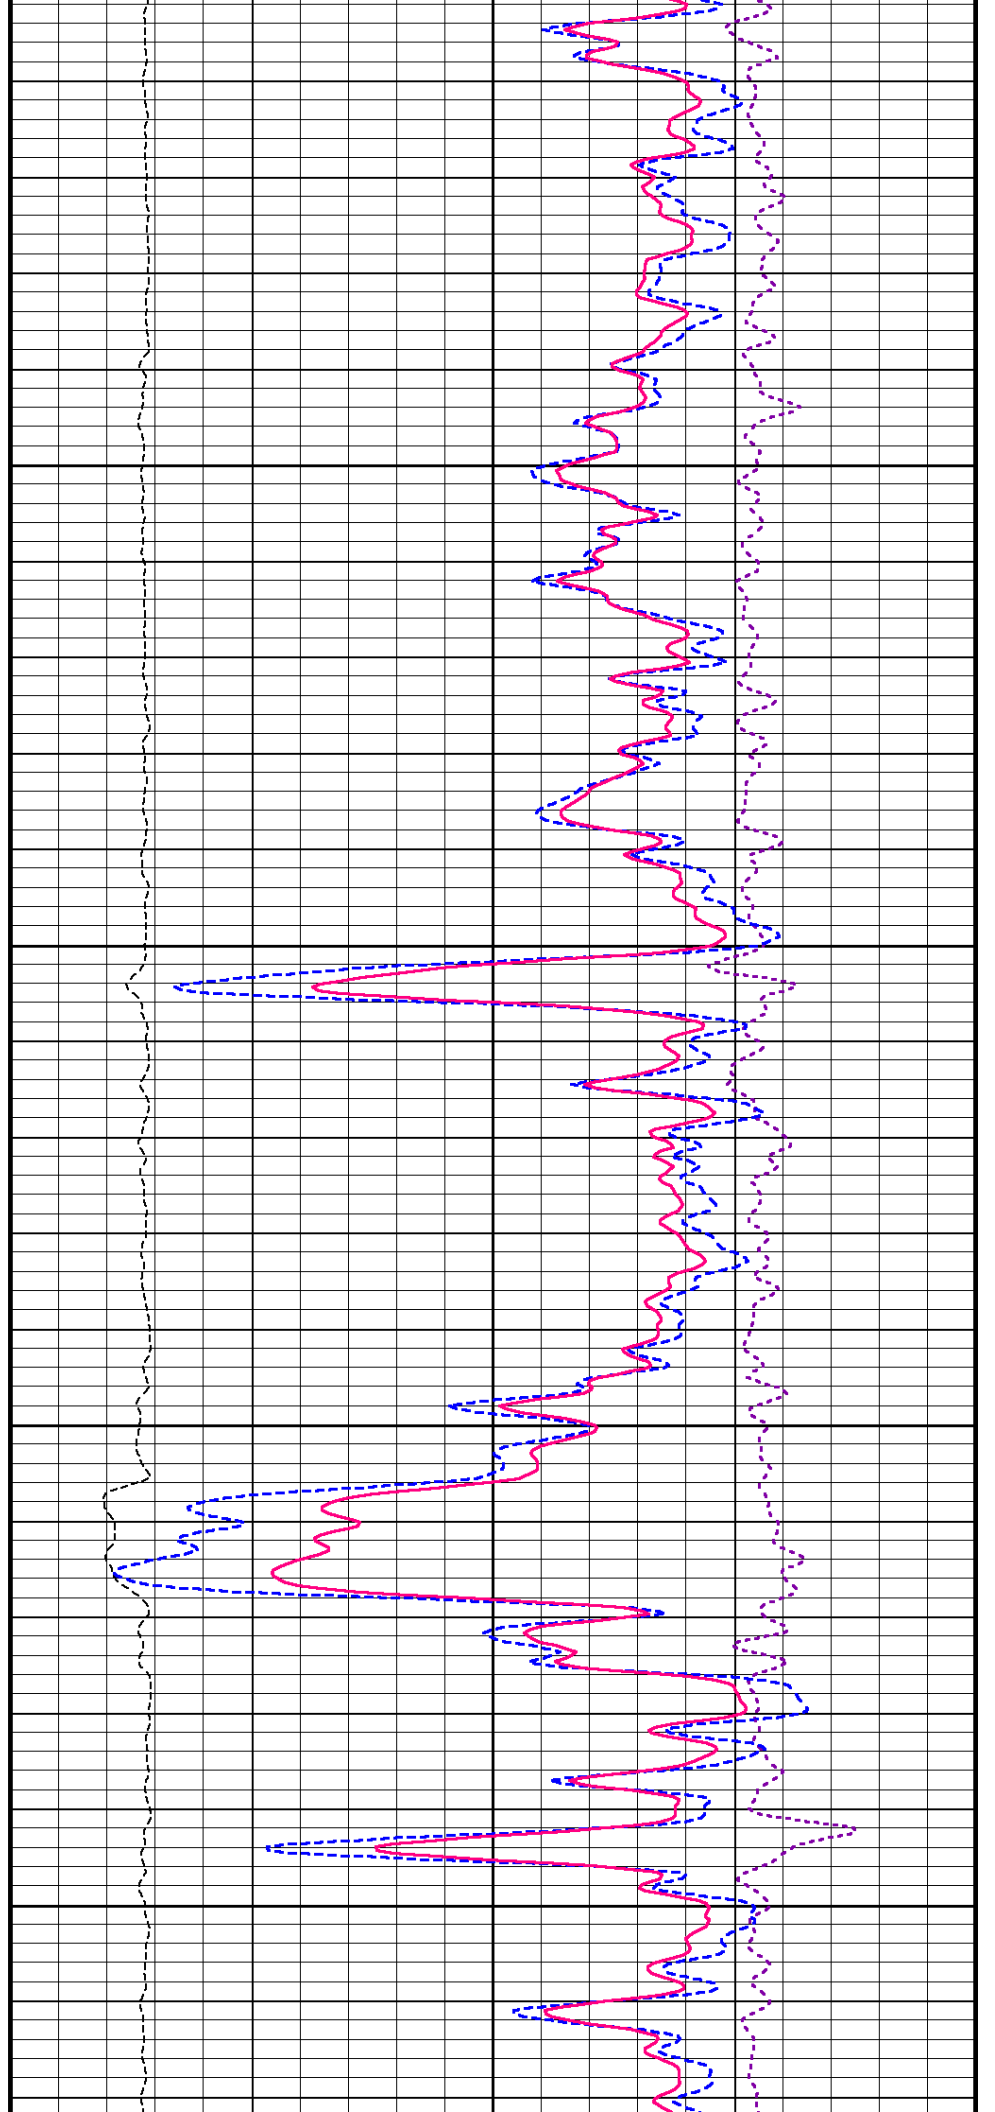

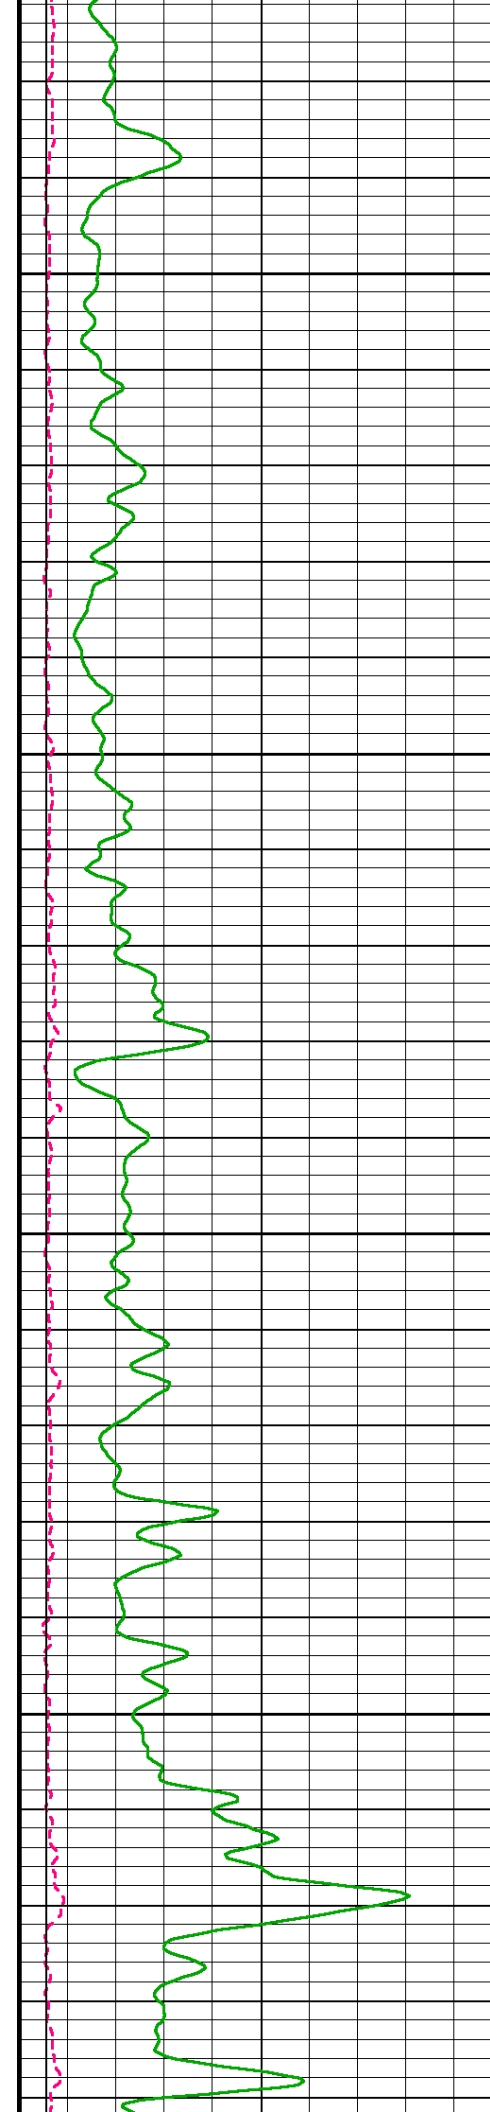



4400

4450


4500



4550

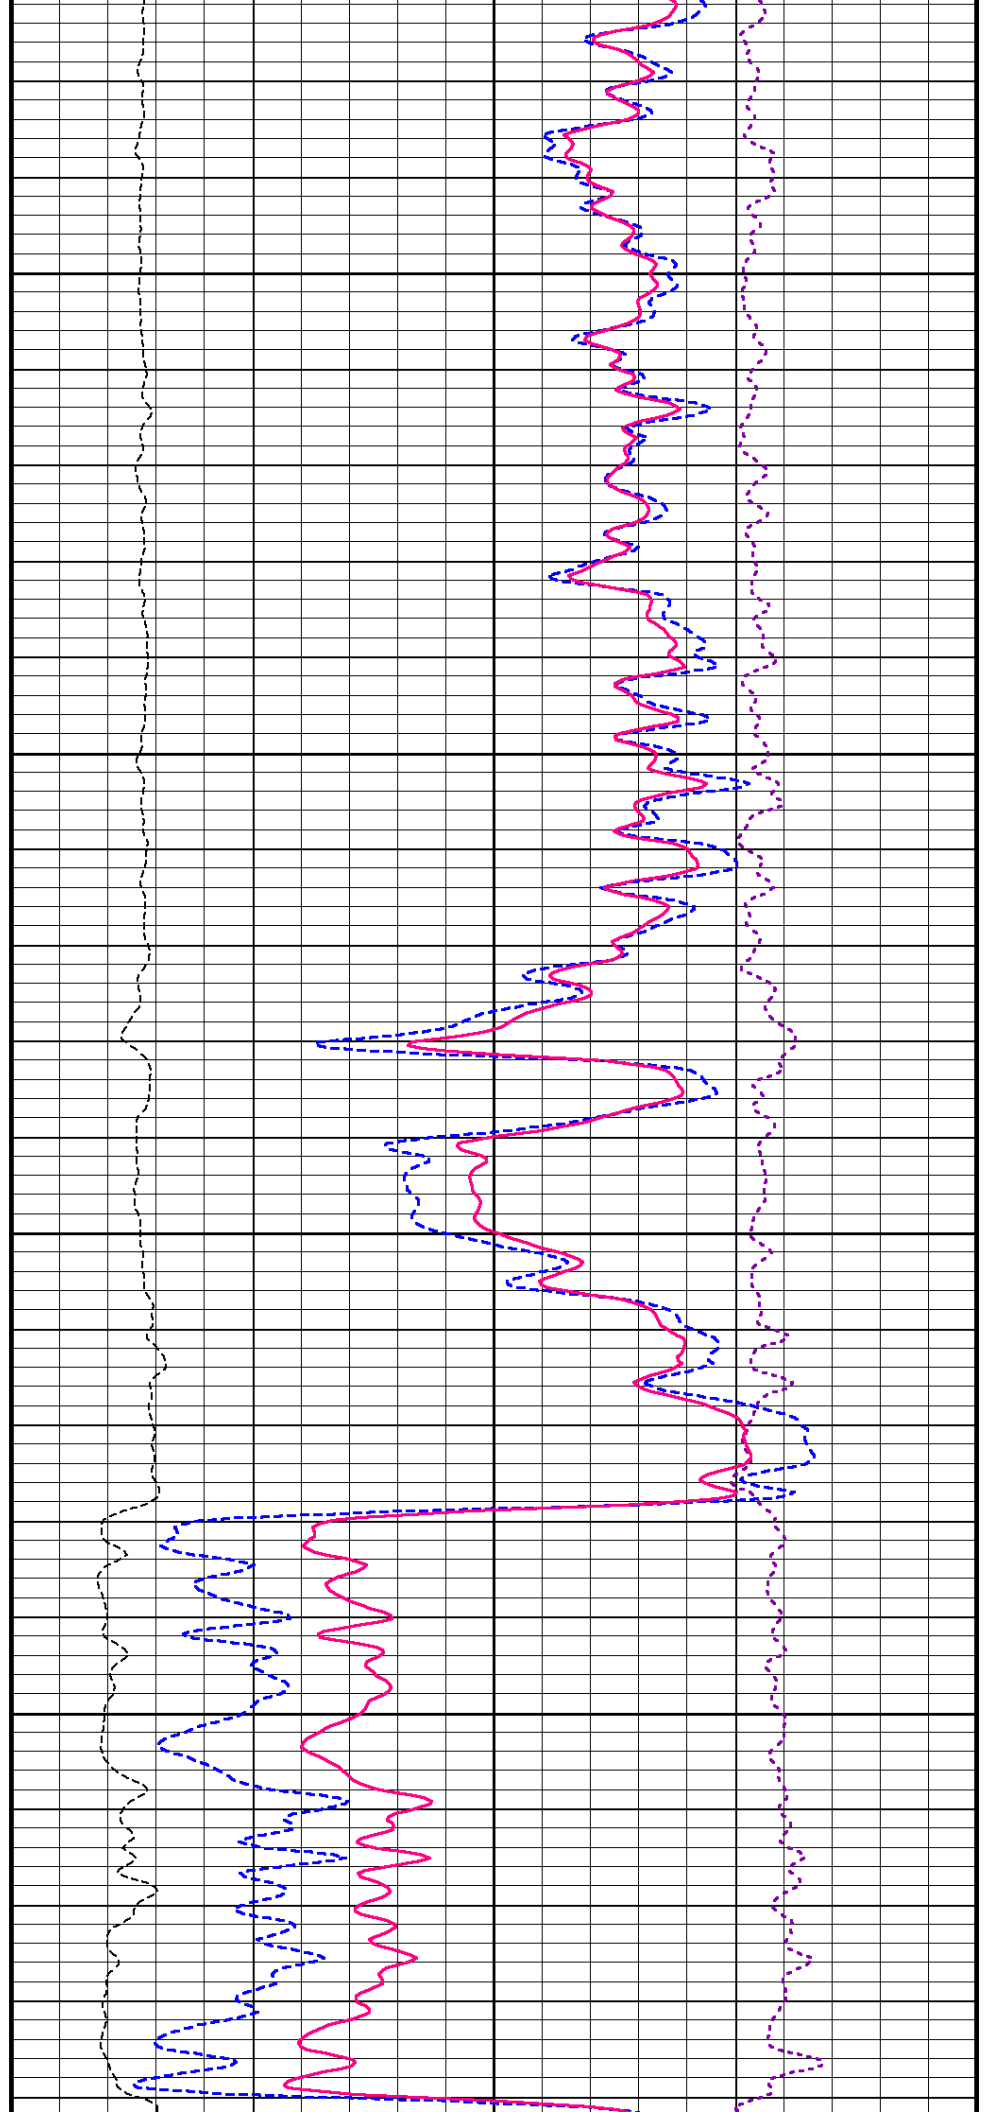


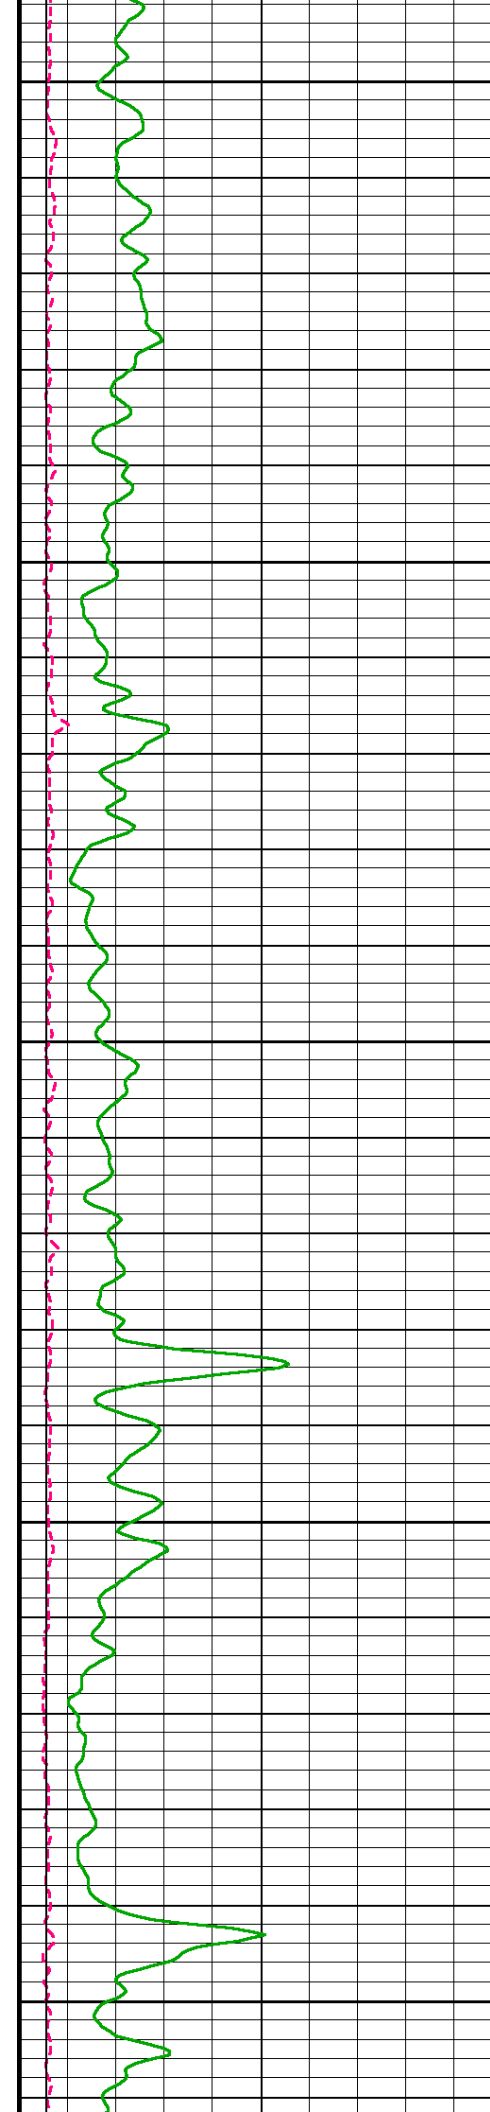

4600
4650
4700
4750
4800

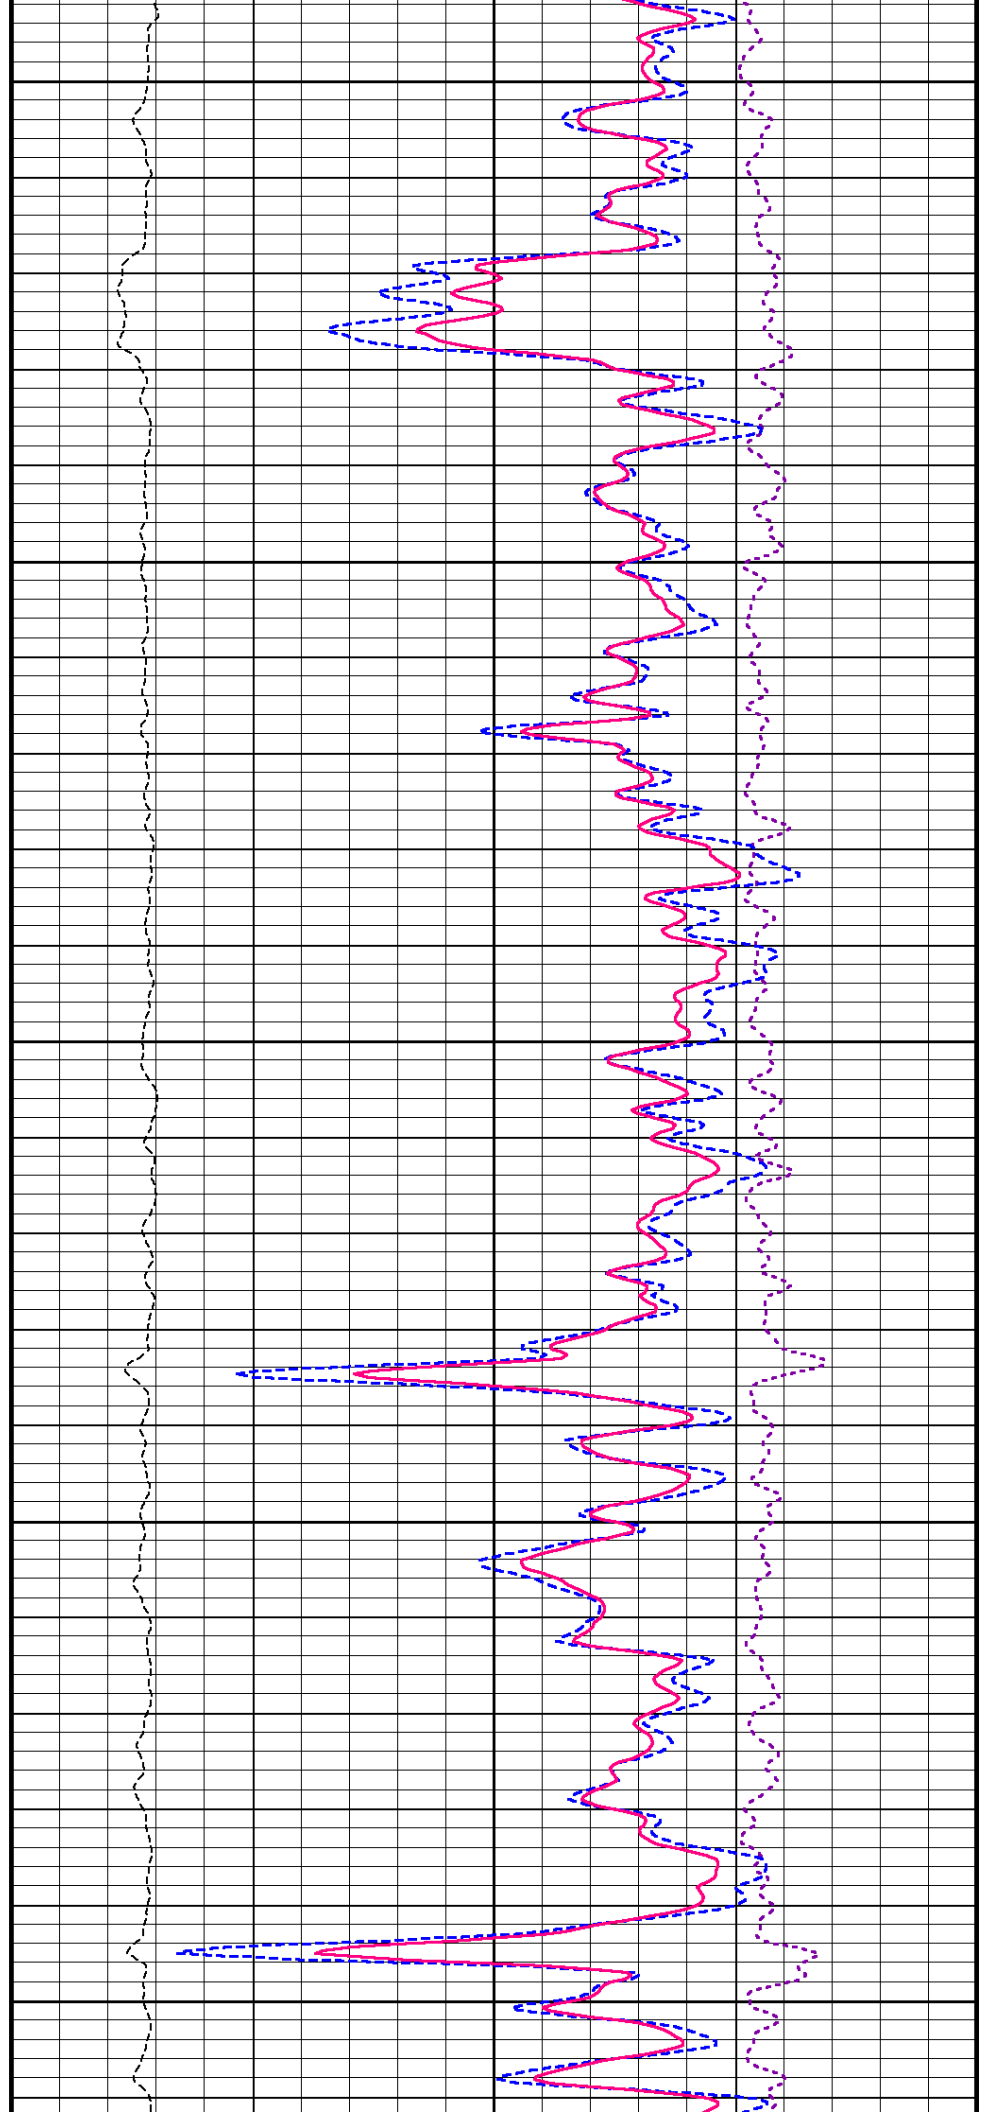

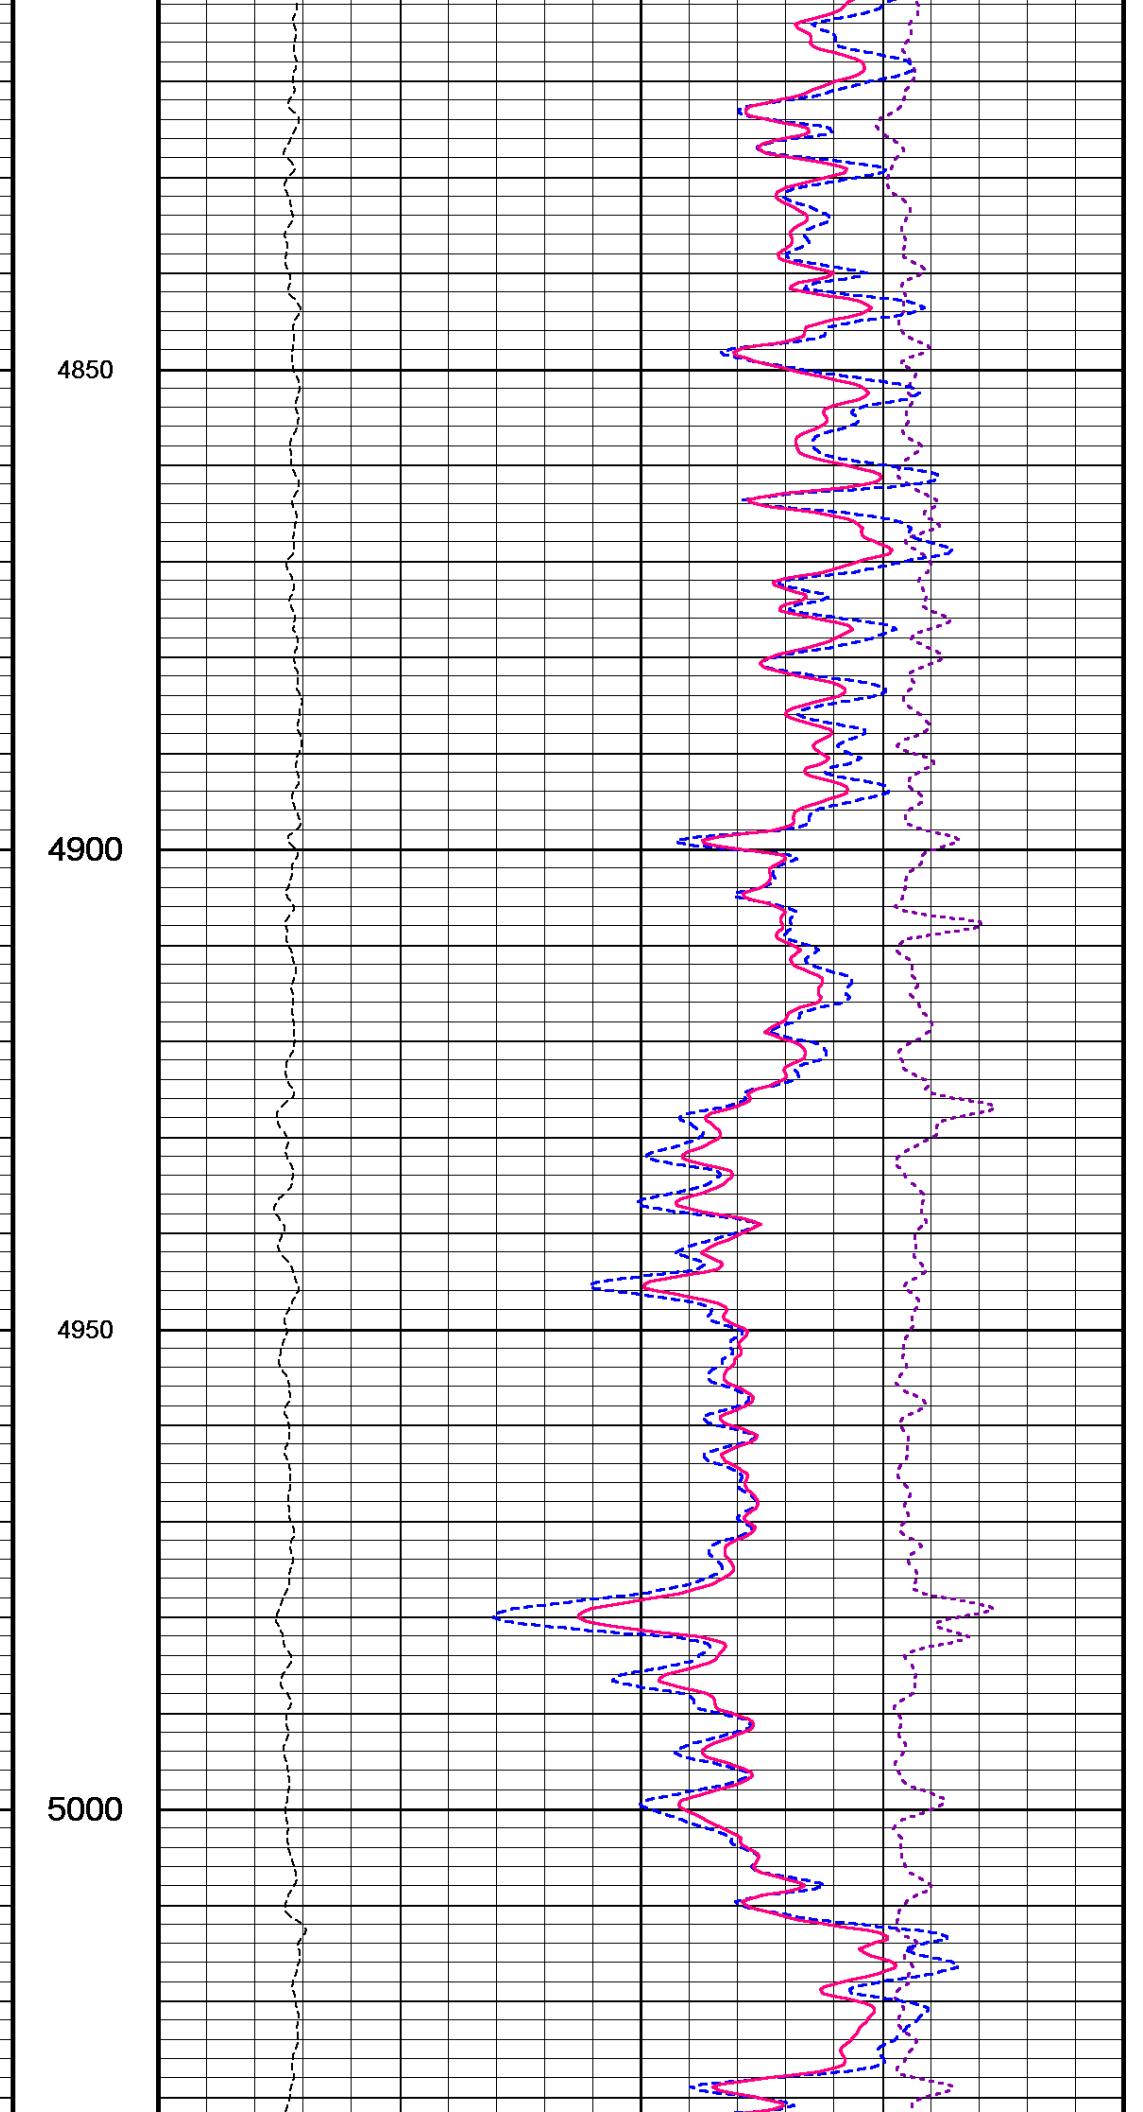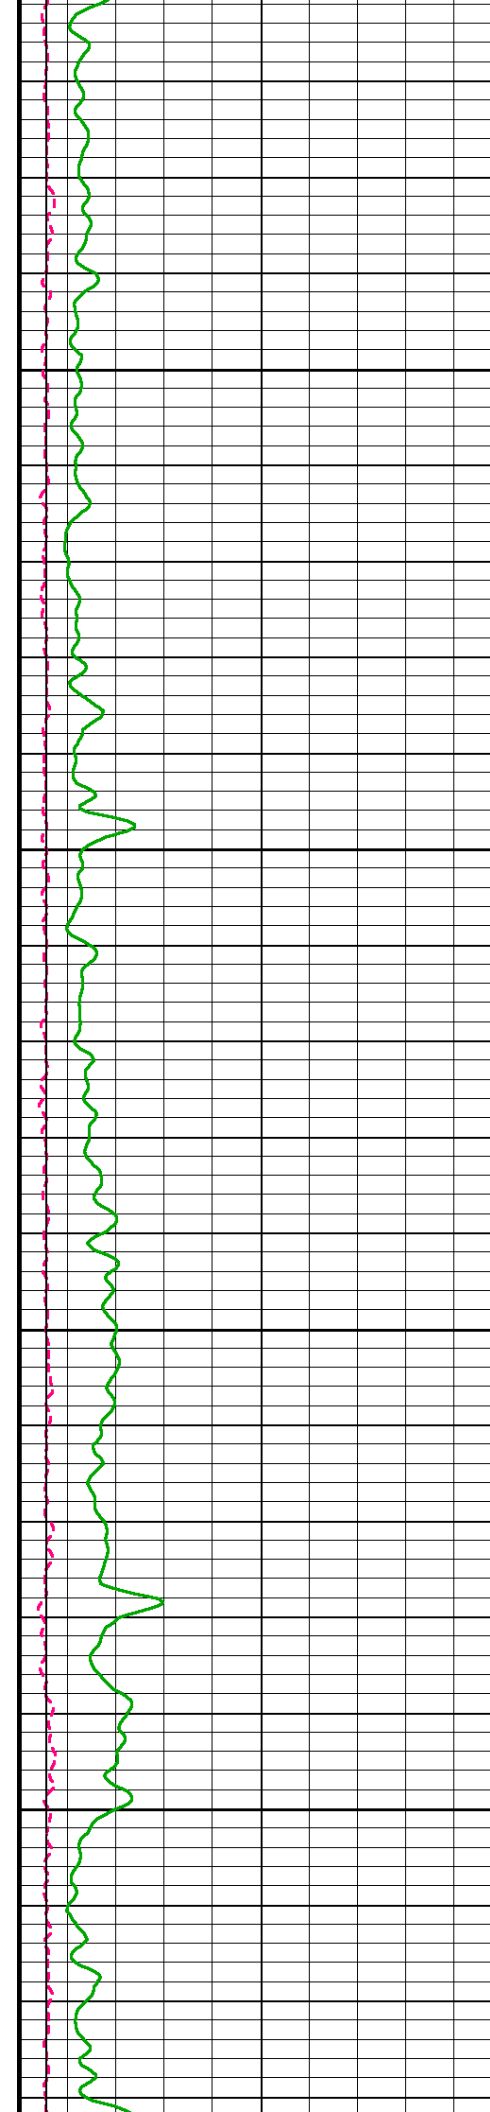

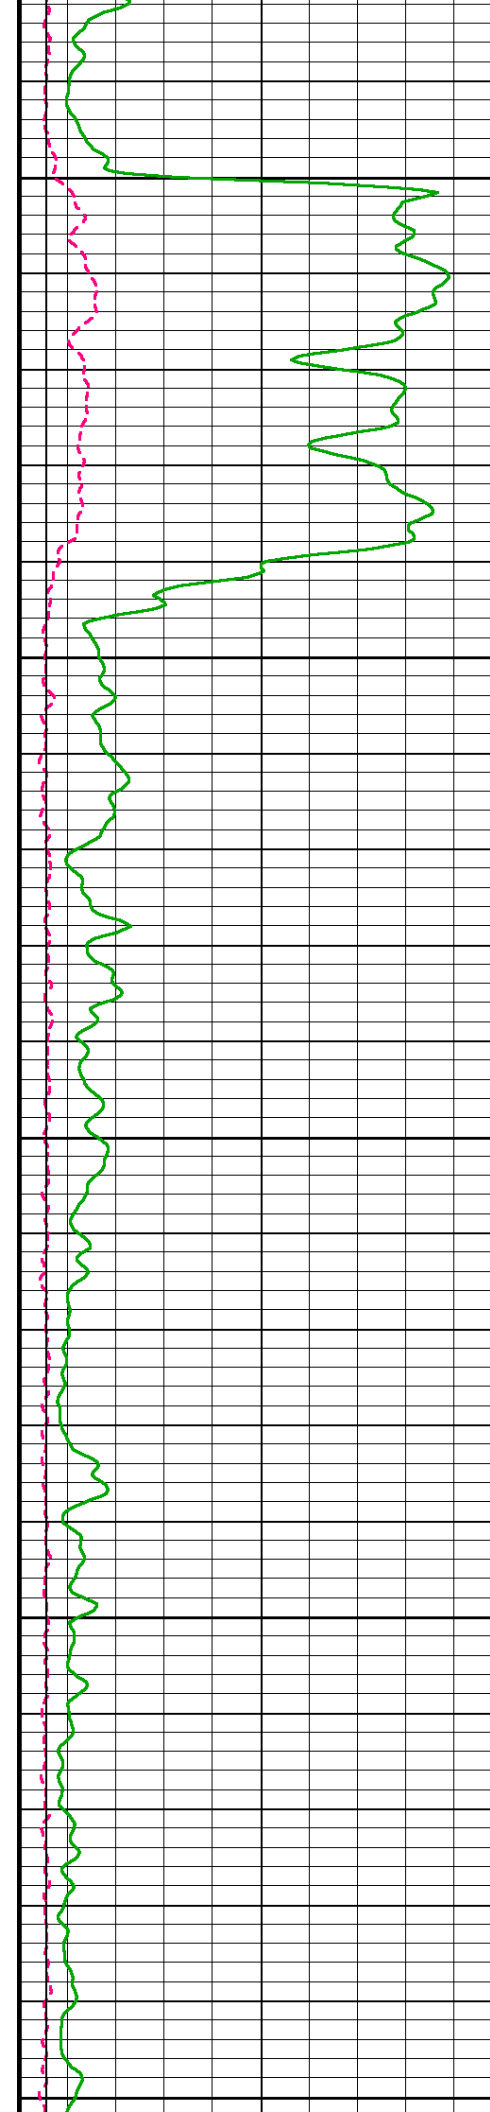


5050


5100

5150

5200

5250

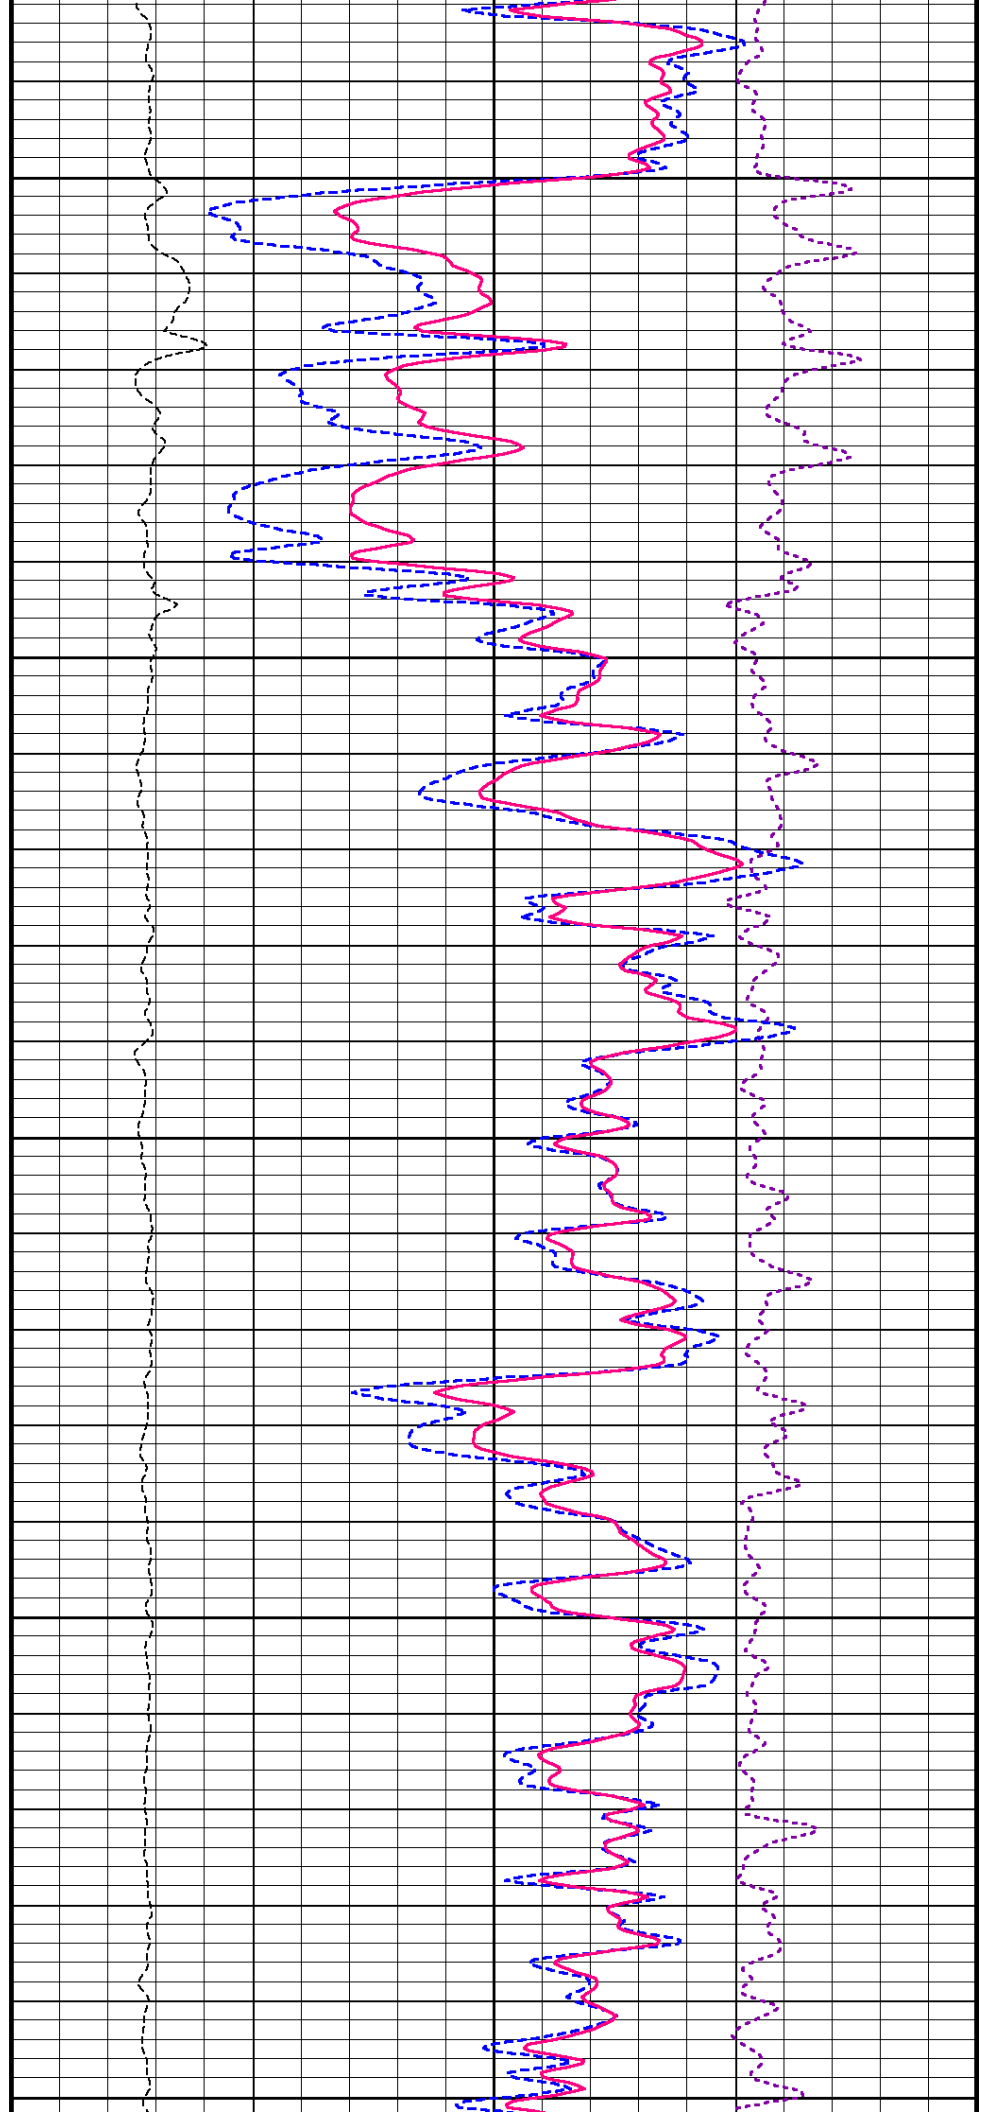

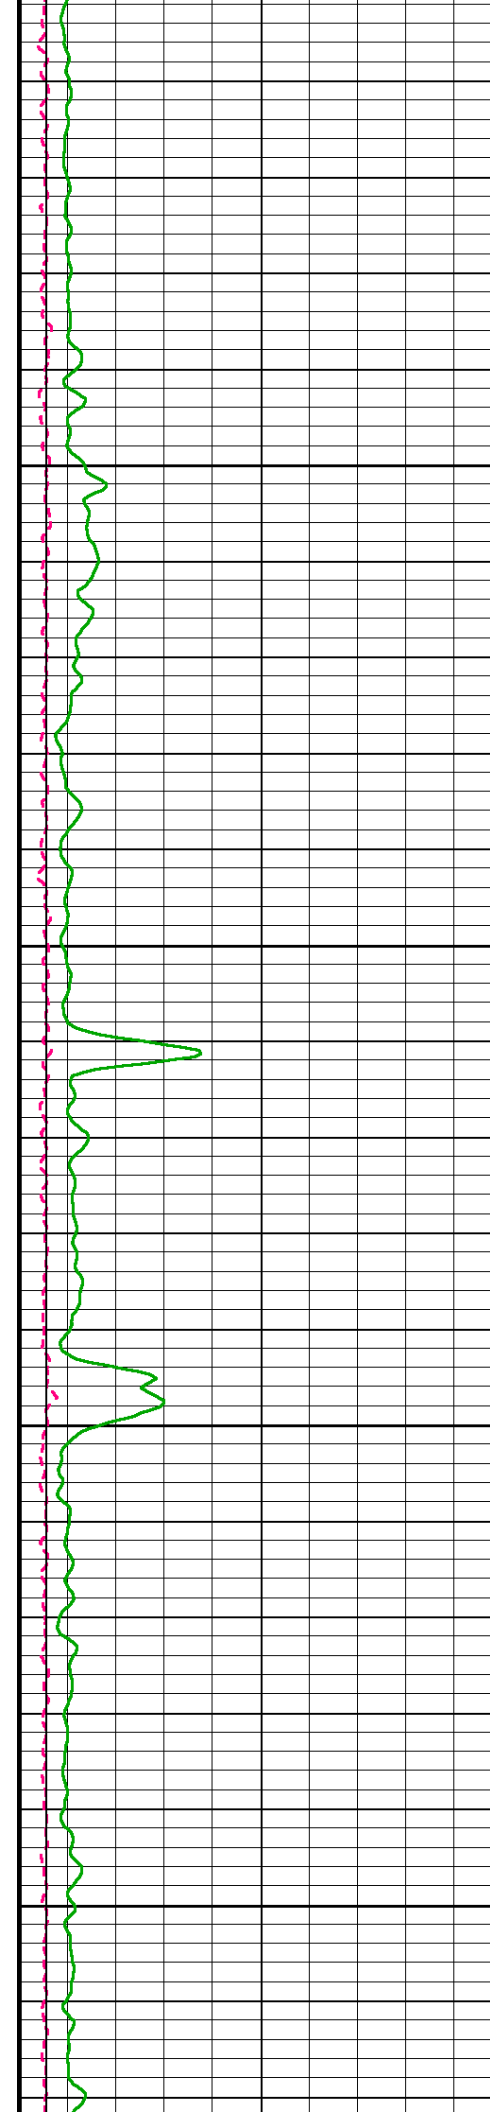




5300


5350

5400

5450

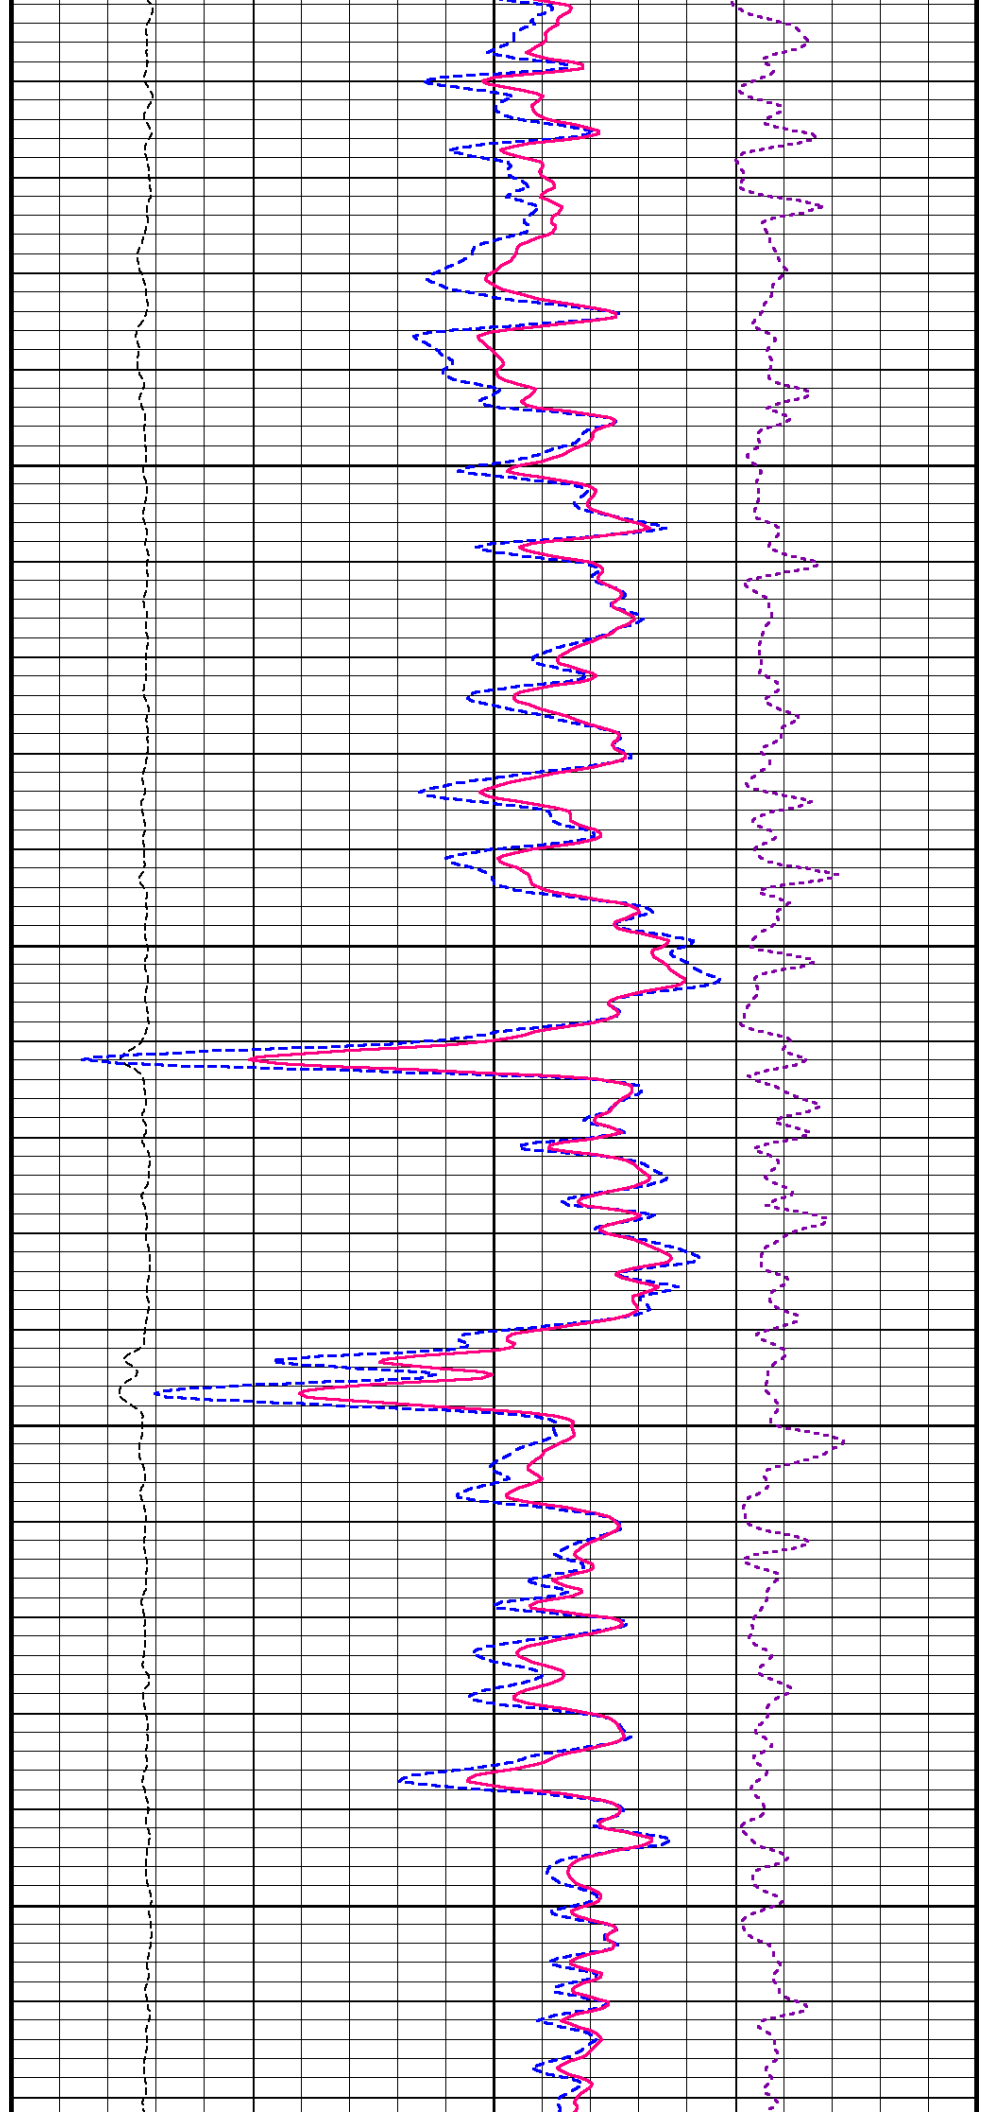

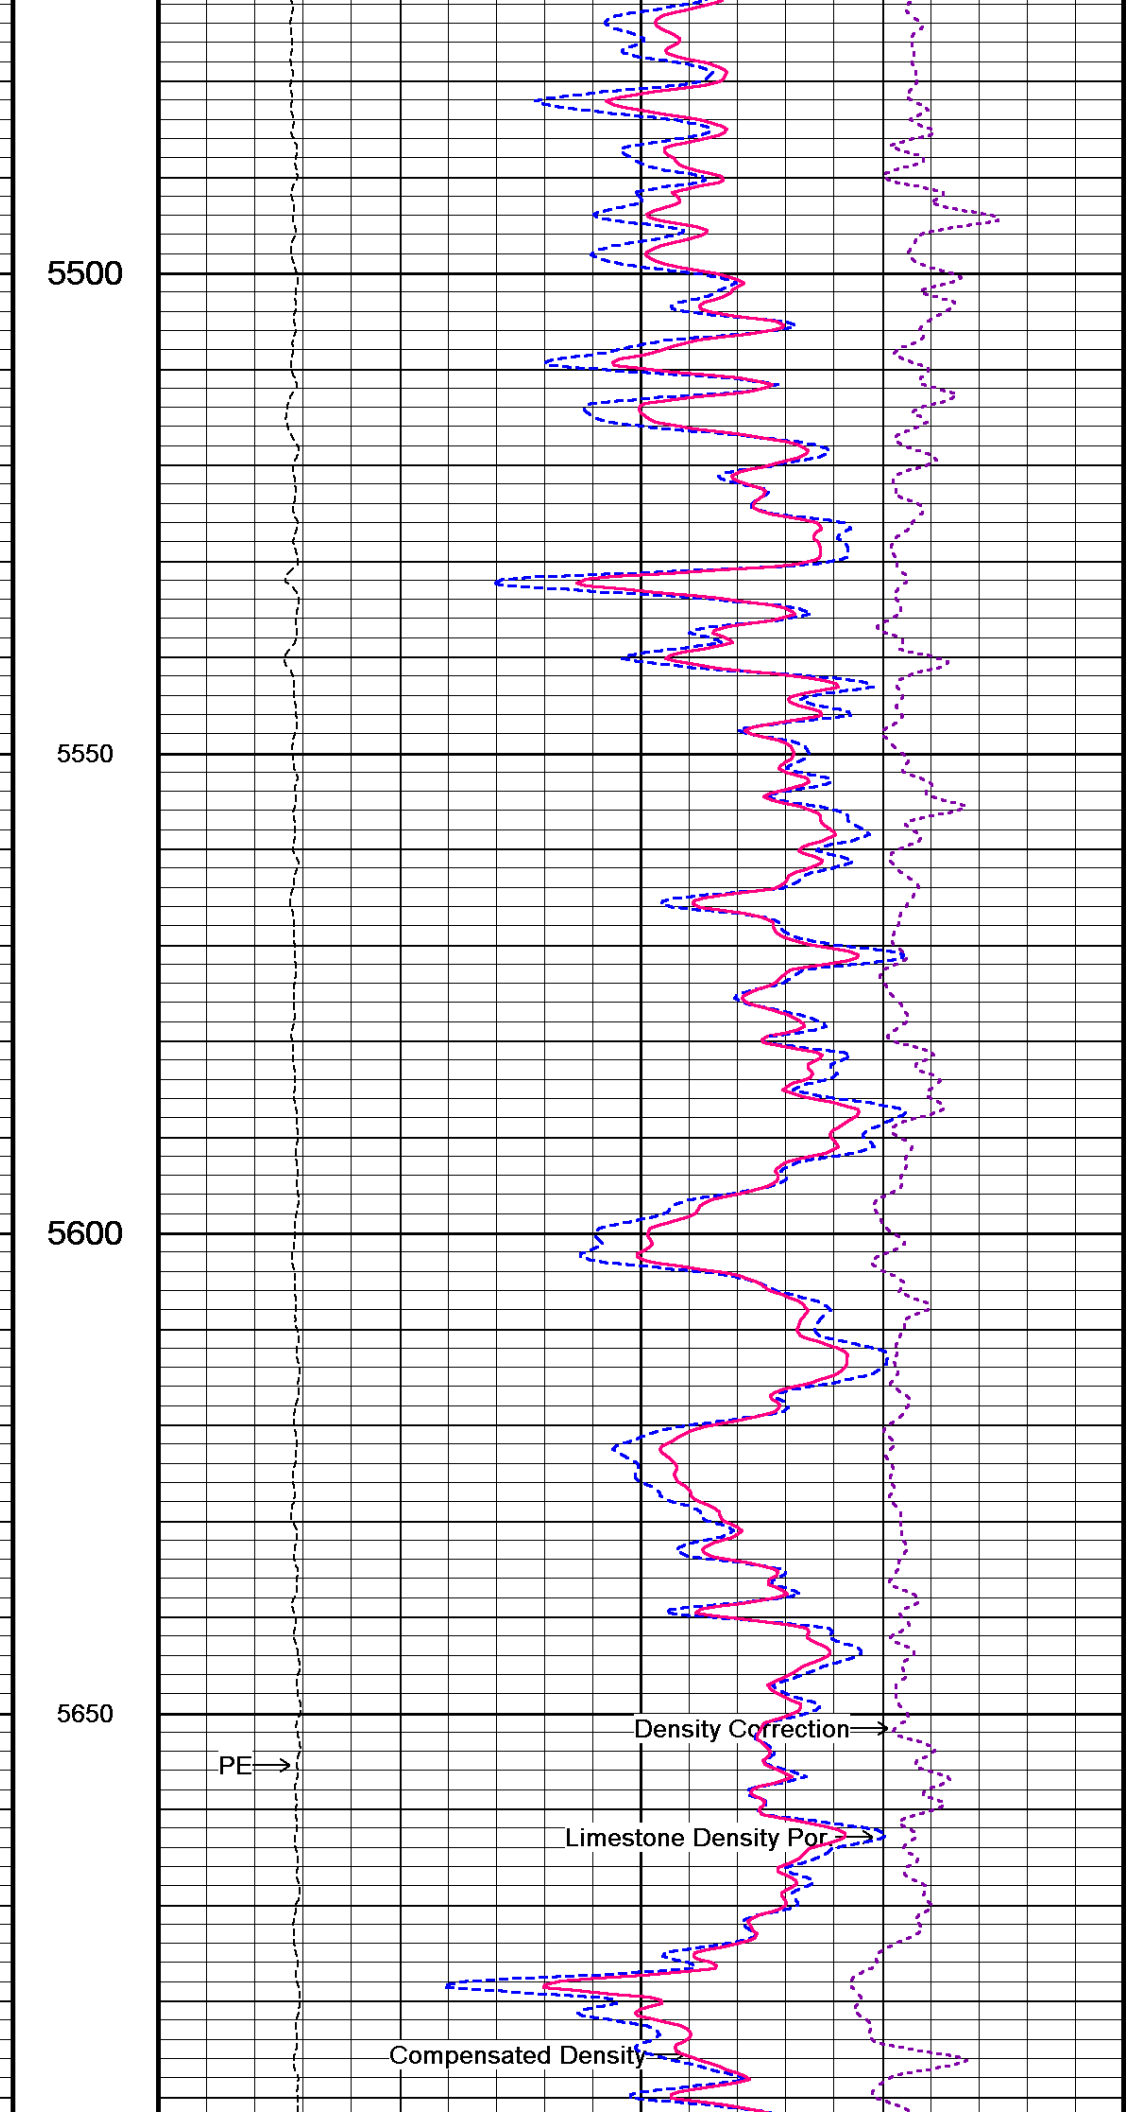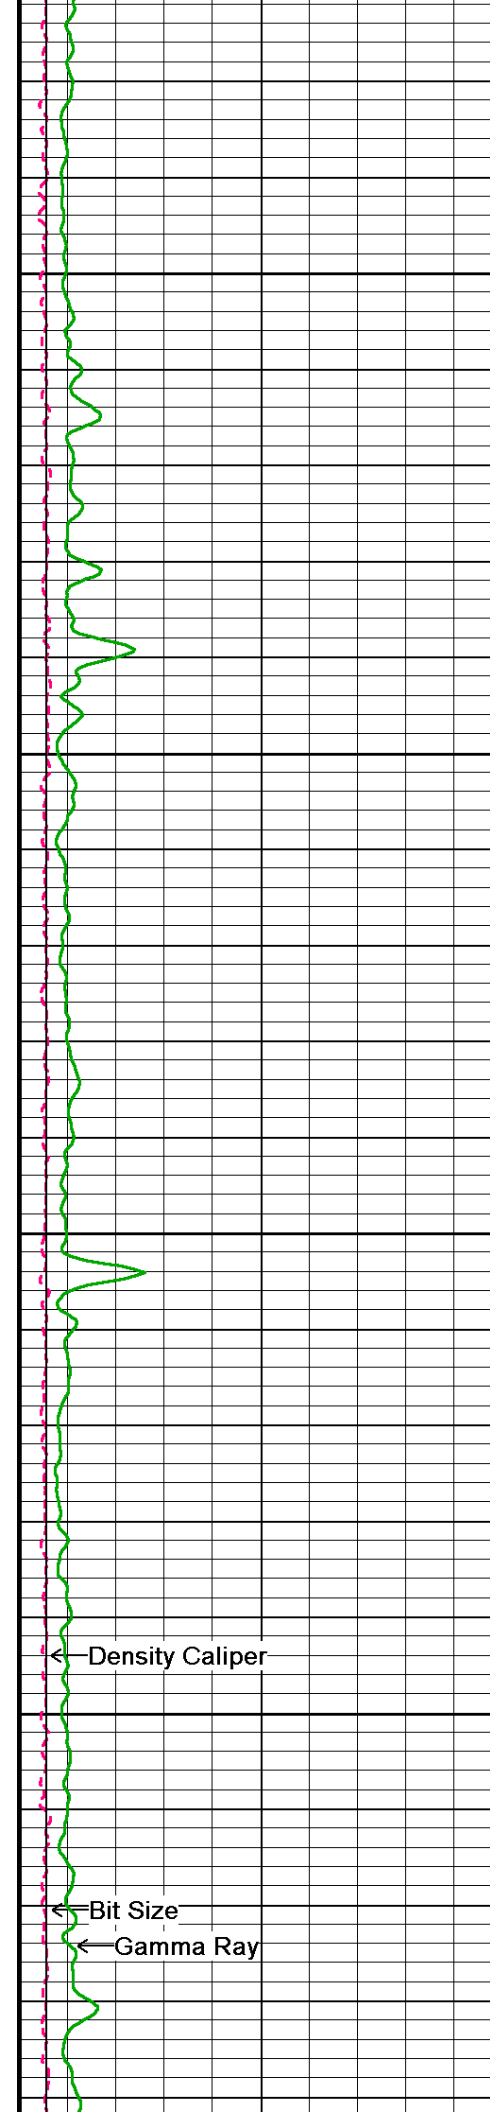

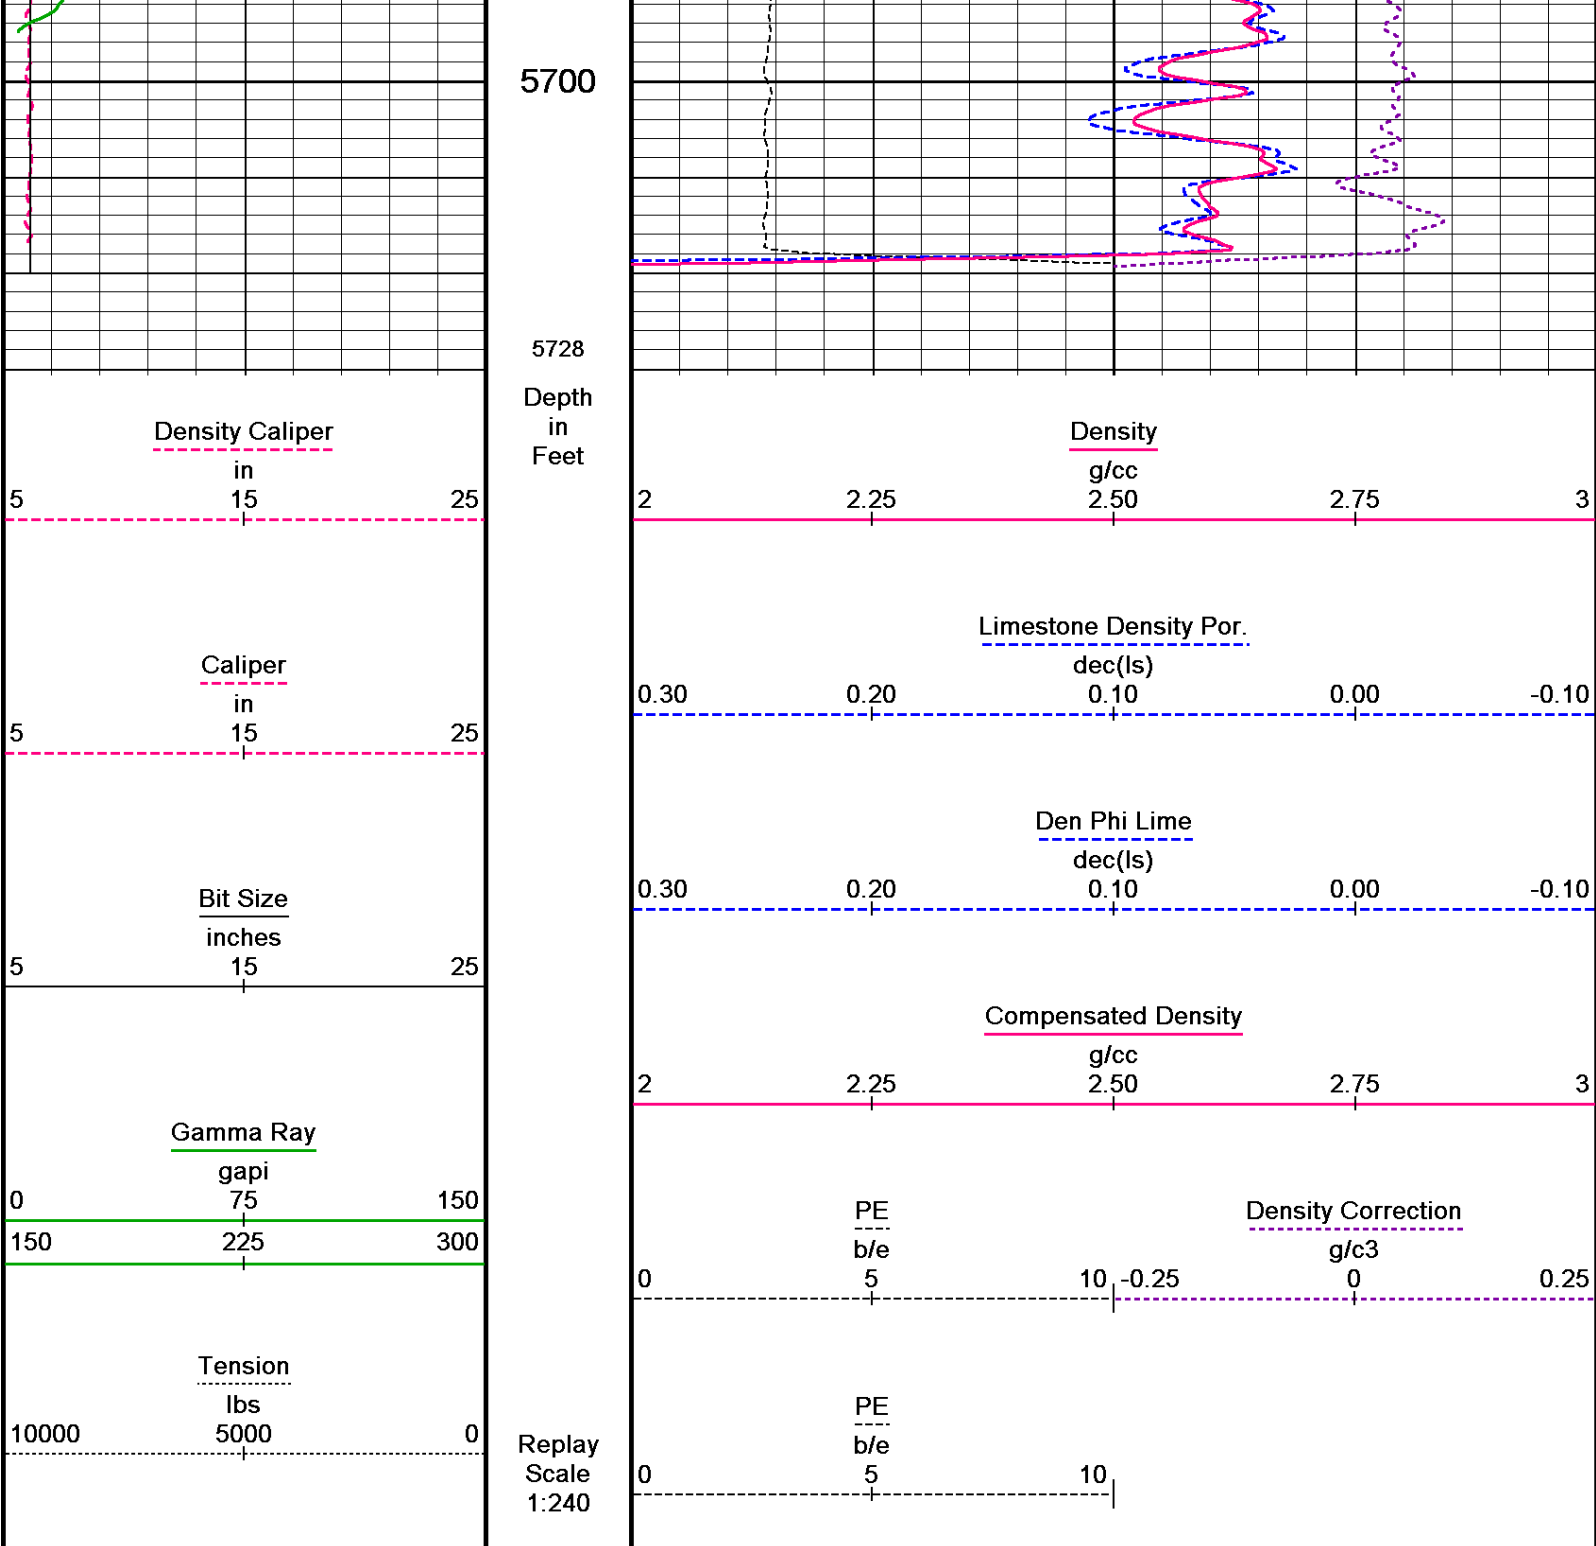

Depth Based Data - Maximum Sampling Increment 10.0cm
 Plotted on 02-DEC-2011 17:20
 Filename: C:\DOCUME~1\hopkinjg\LOCALS~1\Temp\Weatherford ...\McCord 'A' 20H_(Composite)_.dta
 Recorded on |
 System Versions: Plotted with 12.01.3513

5 INCH BULK DENSITY LOG

RUN #2 BEFORE SURVEY CALIBRATION
 C:\DOCUME~1\hopkinjg\LOCALS~1\Temp\Weatherford PreView\0\GOOD RTAP.dta

General Constants All 000 Last Edited on 23-NOV-2011 11:17

General Parameters		
Mud Resistivity	0.800	ohm-metres
Mud Resistivity Temperature	55.000	degrees F
Water Level	0.000	feet
Density/Neutron Processing	Wet Hole	

Hole/Annular Volume and Differential Caliper Parameters

Hole/Annular Volume and Differential Caliper Parameters		
HVOL Method	Single Caliper	
HVOL Caliper 1	Density Caliper	
HVOL Caliper 2	N/A	
Annular Volume Diameter	4.500	inches
Caliper for Differential Caliper	MIE Caliper X	

Rwa Parameters		
Porosity used	Limestone Density Por.	
Resistivity used	Array Ind. Four Res Rt	
RWA Constant A	0.610	
RWA Constant M	2.150	

Down-hole Tension Calibration SMS 0

Field Calibration on 29-MAR-2011 01:00

Reading No	Measured	Calibrated (lbs)
1	15152.07	0.00
2	19175.97	2000.00

MMS Parameters MMS-E.B 167

Last Edited on 21-NOV-2011 19:06

Logging Parameters

Firmware Version	2v40	
Caliper Open On	MAI	
Caliper Open Delay	0.0	minutes
Caliper Closed On	Unknown	
Caliper Closed Delay	N/A	minutes
Sample Rate	1.00	seconds
Use Deep Sleep	No	
Delay Deep Sleep	N/A	
Deep Sleep Wake Time	N/A	minutes
Deep Sleep Wake on Temperature	N/A	
Deep Sleep Wake Temperature	N/A	degrees C
Deep Sleep Wake on Pressure	N/A	
Deep Sleep Wake Pressure	N/A	psi
MMI Pad Pressure	8.0	

Release Parameters

Pulse Duration Base Level	10.0	seconds
Pulse Duration Transition Time	10.0	seconds
Pulse Duration Status Pulse From	20.0	seconds
Pulse Duration Caliper Close From	55.0	seconds
Pulse Duration Caliper Open From	60.0	seconds
Pulse Duration Release Pulse From	110.0	seconds
Pulse Duration Release Pulse To	280.0	seconds
Pulse Release Duration	240.0	seconds
Pulse Discriminator Pressure Band	32.0	seconds
Pulse Pressure Discriminator	106.0	seconds
Use Negative Pulsing	No	
Good Status Reply Open Hole	65535.0	seconds
Good Status Reply Cased Hole	20.0	seconds
Bad Status Reply	60.0	seconds
Status Pulse To	30.0	seconds
Caliper Close To	0.0	seconds
Caliper Open To	70.0	seconds

Configuration

MMS,MGS,MDN,MPD,MPD,MIM,MIE,MAI

Gamma Calibration MGS-C.J 136

Field Calibration on 17-NOV-2011 08:02

	Measured	Calibrated (API)
Background	40	28
Calibrator (Gross)	1043	724
Calibrator (Net)	1004	696

Gamma Constants MGS-C.J 136

Last Edited on 22-NOV-2011 23:02

Gamma Calibrator Number	36	
Mud Density	1.10	gm/cc
Caliper Source for Processing	Density Caliper	

Tool Position Eccentred
 Concentration of KCl 0.00 kppm

High Resolution Temperature Calibration MGS-C.J 136 Field Calibration on 17-NOV-2011 08:02

	Measured	Calibrated(Deg F)
Lower	50.00	50.00
Upper	100.00	100.00

High Resolution Temperature Constants MGS-C.J 136 Last Edited on

Pre-filter Length	11
-------------------	----

SP Calibration MGS-C.J 136 Field Calibration on 30-MAR-2011 10:03

	Measured	Calibrated (mV)
Reference 1	102.2	98.7
Reference 2	-94.7	-98.3

Neutron Calibration MDN-B.J 388 Base Calibration on 12-OCT-2011 09:45
Field Check on 17-NOV-2011 08:09

	Measured		Calibrated (cps)	
	Near	Far	Near	Far
Base Calibration	2961	90	3714	110
Ratio	33.000		33.764	
Field Calibrator at Base			Calibrated (cps)	
			2455	3622
Ratio			0.678	
Field Check			Calibrated (cps)	
			2497	3633
Ratio			0.687	

Neutron Constants MDN-B.J 388 Last Edited on 18-NOV-2011 13:52

Neutron Source Id	P31112B	
Neutron Jig Number	N639	
Epithermal Neutron	No	
Caliper Source for Processing	Density Caliper	
Stand-off	0.00	inches
Mud Density	1.00	gm/cc
Limestone Sigma	7.10	cu
Sandstone Sigma	4.26	cu
Dolomite Sigma	4.70	cu
Formation Pressure Source	Constant Value	
Formation Pressure	0.00	kpsi
Temperature Source	None	
Temperature	20.00	degrees F
Mud Salinity	0.00	kppm
Formation Fluid Salinity Source	Constant Value	
Formation Fluid Salinity	0.00	kppm
Barite Mud Correction	Not Applied	

Magnetometer Parameters MIE-A.A 209

Date Of Last Magnetometer Calibration	26-NOV-2010,12:01		
	X Magnetometer	Y Magnetometer	Z Magnetometer
Slope	-1.000000	-1.001951	-1.007691
Offset	0.007782	-0.016800	0.011730

Magnetometer Constants MIE-A.A 209 Last Edited on

Magnetometer Calibrator Number	000
--------------------------------	-----

Accelerometer Parameters MIE-A.A 209

Date Of Last Accelerometer Calibration	25-NOV-2010,12:19		
	X Accelerometer	Y Accelerometer	Z Accelerometer
Slope	-1.113214	-1.109979	-1.101653
Offset	0.005467	0.005399	0.010368

Accelerometer Calibrator Number 000

Accelerometer Temperature Characterisation

X Accelerometer

Serial Number	826			
Calibration Date	01-Jan-1998			
	B0	B1	B2	B3
Bias(g)	0.00000e+000	2.32377e-005	-1.87334e-008	9.07324e-011
	SF0	SF1	SF2	SF3
Scale Factor(mA/g)	3.00000e+000	2.71389e-004	4.55326e-007	4.58364e-010

Y Accelerometer

Serial Number	617			
Calibration Date	11-May-2008			
	B0	B1	B2	B3
Bias(g)	0.00000e+000	1.76675e-005	6.93464e-010	2.98691e-011
	SF0	SF1	SF2	SF3
Scale Factor(mA/g)	3.00000e+000	2.56882e-004	5.72598e-007	2.37496e-010

Z Accelerometer

Serial Number	844			
Calibration Date	01-Jan-1998			
	B0	B1	B2	B3
Bias(g)	0.00000e+000	-1.21769e-005	-1.46867e-008	-6.44015e-011
	SF0	SF1	SF2	SF3
Scale Factor(mA/g)	3.00000e+000	2.73539e-004	4.65657e-007	2.88996e-010

Caliper Calibration MIE-A.A 209

Base Calibration on 25-NOV-2010 07:56

Field Calibration on 17-NOV-2011 07:55

Base Calibration

Reading No	Pads 1-5 Meas.	Pads 3-7 Meas.	Calibrator Size (in)		
1	26963	26793	5.96		
2	36961	37191	7.97		
3	46401	44863	9.84		
4	58072	58409	11.91		
5	0	0	0.00		

Reading No	Pad 2 Meas.	Pad 4 Meas.	Pad 6 Meas.	Pad 8 Meas.	Calibrator Size (in)
1	24829	25688	24937	24692	5.96
2	33487	34230	33721	33433	7.97
3	40559	41186	42962	42856	9.84
4	51771	52426	51758	51697	11.91
5	0	0	0	0	0.00

Field Calibration

	Measured	Measured	Actual		
	Pads 1-5 Caliper(in)	Pads 3-7 Caliper(in)	Caliper(in)		
	6.06	5.97	5.96		
	Measured	Measured	Measured	Measured	Actual
	Pad 2 Caliper(in)	Pad 4 Caliper(in)	Pad 6 Caliper(in)	Pad 8 Caliper(in)	Caliper(in)
	3.01	2.98	3.02	3.04	5.96

Caliper Constants MIE-A.A 209

Last Edited on 25-NOV-2010 07:57

Caliper Difference for BRKT 0.120 inches

Navigation Constants MIE-A.A 209

Last Edited on 17-NOV-2011 09:51

Magnetic Declination 4.80 degrees East

Imager Pad Check MIE-A.A 209

Field Check on

Pad 1	Pad Not Tested	Pad 5	Pad Not Tested
Pad 2	Pad Not Tested	Pad 6	Pad Not Tested
Pad 3	Pad Not Tested	Pad 7	Pad Not Tested
Pad 4	Pad Not Tested	Pad 8	Pad Not Tested

Compact Micro Imager Constants MIE-A.A 209

Last Edited on 17-NOV-2011 09:51

Sonde Configuration	Imager Mode	degrees
Arm-Pad Kit	0	

Centre Pad 1 Rotational Offset	0.00	degrees
Image/Borehole Ovality Reference	Azimuth of Pad 1	degrees
Non Active Buttons	Omit	feet
Search Angle	45.00	feet
Correlation Interval	3.28	mAmp
Correlation Step	1.64	mAmp
Current Offset	0.0000	
Squasher Start	0.0500	
Image Processing	Enabled	

High Resolution Temperature Calibration MAI-B.J 391

Field Calibration on 19-OCT-2011 11:50

	Measured	Calibrated(Deg F)
Lower	10.00	50.00
Upper	100.00	212.00

High Resolution Temperature Constants MAI-B.J 391

Last Edited on

Pre-filter Length	11
-------------------	----

Induction Calibration MAI-B.J 391

Base Calibration on 19-OCT-2011 11:50
Field Check on 17-NOV-2011 07:39

Base Calibration					
Test Loop Calibration		Measured		Calibrated (mmho/m)	
Channel	Low	High	Low	High	
1	17.1	473.5	9.3	966.2	
2	6.0	381.9	7.6	821.4	
3	3.8	262.4	5.2	566.0	
4	2.3	133.8	2.6	279.2	
Array Temperature		76.6	Deg F		
Channel	Base Check (mmho/m)		Field Check (mmho/m)		
	Low	High	Low	High	
1	0.0	0.0	11.7	3820.4	
2	0.0	0.0	29.8	3516.4	
3	0.0	0.0	27.0	3009.6	
4	0.0	0.0	18.4	2063.4	
Deep	0.0	0.0	15.2	1956.4	
Medium	0.0	0.0	40.3	3959.2	
Shallow	0.0	0.0	46.4	5212.7	
Array Temperature		0.0	52.3	Deg F	

Induction Constants MAI-B.J 391

Last Edited on 23-NOV-2011 10:03

Induction Model	RtAP-WBM	
Caliper for Borehole Corr.	Density Caliper	
Hole Size for Borehole Correction	N/A	inches
Tool Centred	No	
Stand-off Type	Fins	
Stand-off	0.50	inches
Number of Fins on Stand-off	6.0000	
Stand-off Fin Angle	60.00	degrees
Stand-off Fin Width	0.5000	inches
Borehole Corr. Rm Source	Temperature Corr	
Temp. for Rm Corr.	MGS External Temperature	
Squasher Start	0.0020	mhos/metre
Squasher Offset	N/A	mhos/metre

Borehole Normalisation

DRM1	0.0000	DRC1	0.0000
DRM2	0.0000	DRC2	0.0000
MRM1	0.0000	MRC1	0.0000
MRM2	0.0000	MRC2	0.0000
SRM1	0.0000	SRC1	0.0000
SRM2	0.0000	SRC2	0.0000

Calibration Site Corrections

Channel 1	0.00	mmhos/metre
Channel 2	0.00	mmhos/metre
Channel 3	0.00	mmhos/metre

Channel 4 0.00 mmhos/metre

Apparent Porosity and Water Saturation Constants

Archie Constant (A)	1.00	
Cementation Exponent (M)	2.00	
Saturation Exponent (N)	2.00	
Saturation of Water for Apor	100.00	percent
Resistivity of Water for Apor and Sw	0.05	ohm-m
Resistivity of Mud Filtrate for Sw	0.00	ohm-m
Source for Rt	0.00	
Source for Rxo	0.00	

Caliper Calibration MPD-C.J 393

Base Calibration on 14-NOV-2011 06:09
Field Calibration on 17-NOV-2011 07:45

Base Calibration

Reading No	Measured	Calibrator Size (in)
1	14534	4.01
2	24031	5.96
3	32482	7.98
4	40112	9.86
5	48560	11.88
6	N/A	N/A

Field Calibration

Measured Caliper (in)	Actual Caliper (in)
6.00	5.96

Photo Density Calibration MPD-C.J 393

Base Calibration on 19-OCT-2011 10:31
Field Check on 17-NOV-2011 07:52

Density Calibration

Base Calibration	Measured		Calibrated (sdu)	
	Near	Far	Near	Far
Reference 1	58016	27308	59869	31110
Reference 2	24483	2694	24557	2522

Field Check at Base

1260.5 1380.6

Field Check

1245.1 1363.2

PE Calibration

Base Calibration	Measured			Calibrated
	WS	WH	Ratio	Ratio
Background	235	1137		
Reference 1	23358	57816	0.408	0.369
Reference 2	6927	24347	0.288	0.271

Field Check at Base

235.4 1137.5

Field Check

230.6 1122.1

Density Constants MPD-C.J 393

Last Edited on 22-NOV-2011 23:02

Density Source Id	p31112b	
Nylon Calibrator Number	18006	
Aluminium Calibrator Number	18006	
Density Shoe Profile	4 inch	
Caliper Source for Processing	Density Caliper	
PE Correction to Density	Not Applied	
Mud Density	1.10	gm/cc
Mud Density Z/A Multiplier	1.11	
Mud Filtrate Density	1.00	gm/cc
Dry Hole Mud Filtrate Density	1.00	gm/cc
DNCT	0.03	gm/cc
CRCT	0.00	gm/cc
Density Z/A Correction	Hybrid	

Matrix density (gm/cc) Depth (m)

2.71 0.00

0.00	0.00
0.00	0.00
0.00	0.00
0.00	0.00
0.00	0.00
0.00	0.00
0.00	0.00
0.00	0.00

RUN #2

DOWNHOLE EQUIPMENT

C:\DOCUME~1\hopkinjg\LOCALS~1\Temp\Weatherford PreView\0\TC CMI TOOLSTRING.dta

RUNNING TOOL

MLK-A 1 LG: 4.87 ft WT: 30.9 lb OD: 2.24 in

EMPTY EXT BATTERY

MLK-A 2 LG: 14.23 ft WT: 30.9 lb OD: 2.24 in

EMPTY EXT BATTERY

MLK-A 3 LG: 14.23 ft WT: 30.9 lb OD: 2.24 in

SKJ-D Compact Knuckle Joint

SKJ-D 30 LG: 2.17 ft WT: 24.3 lb OD: 2.24 in

MBS-G.A 200v Compact Battery Sub

MBS-G.A 112 LG: 16.66 ft WT: 132.3 lb OD: 2.24 in

Compact Memory Sub E.B

MMS-E.B 167 LG: 5.20 ft WT: 37.5 lb OD: 2.24 in

Compact Tool Isolator sub.

MTI-B.A 63 LG: 1.54 ft WT: 13.2 lb OD: 2.24 in

Compact Short Gamma

MGS-C.J 136 LG: 3.41 ft WT: 24.3 lb OD: 2.24 in

SKJ-E.A Compact Knuckle Joint

SKJ-E.A 140 LG: 2.17 ft WT: 24.3 lb OD: 2.24 in

SHA-J.A Compact Swivel Head Adaptor

SHA-J.A 208 LG: 2.30 ft WT: 22.0 lb OD: 2.24 in

MIS-A.A Compact Inline Bowspring sub

MIS-A.A 259 LG: 5.70 ft WT: 33.1 lb OD: 2.24 in

Compact Neutron

MDN-B.J 388 LG: 5.04 ft WT: 50.7 lb OD: 2.24 in

Compact Density/Caliper

MPD-C.J 393 LG: 9.59 ft WT: 90.4 lb OD: 2.24 in

MIS-A.A Compact Inline Bowspring sub

MIS-A.A 277 LG: 5.70 ft WT: 33.1 lb OD: 2.24 in

SHA-J.A Compact Swivel Head Adaptor

SHA-J.A 451 LG: 2.30 ft WT: 22.0 lb OD: 2.24 in

SKJ-E.A Compact Knuckle Joint

SKJ-E.A 207 LG: 2.17 ft WT: 24.3 lb OD: 2.24 in

MIS-E.B Compact Inline Standoff sub

MIS-E.B 572 LG: 2.14 ft WT: 15.4 lb OD: 2.24 in

SKJ-E.B Compact Knuckle Joint



84.71 ft	GRGM - MGS Gamma Ray
82.72 ft	GSXT - MGS External Temperature
69.01 ft	NPRL - Limestone Neutron Por.
61.77 ft	CLDC - Density Caliper
59.84 ft	DPRL - Limestone Density Por.
59.84 ft	DEN - Compensated Density
59.84 ft	DCOR - Density Correction
59.77 ft	PDPE - PE

SKJ-E.B 479 LG: 2.17 ft WT: 24.3 lb OD: 2.24 in

MIS-A.A Compact Inline Bowspring sub
MIS-A.A 62 LG: 5.70 ft WT: 33.1 lb OD: 2.24 in

Compact MMI Memory Section
MIM-A.A 209 LG: 4.65 ft WT: 26.5 lb OD: 2.24 in

Compact MMI Electrode Section
MIE-A.A 209 LG: 13.96 ft WT: 99.2 lb OD: 4.10 in

MIS-D.A Compact Inline Bowspring sub
MIS-D.A 590 LG: 5.70 ft WT: 33.1 lb OD: 2.24 in

MIS-E.A Compact Inline Standoff sub
MIS-E.A 184 LG: 2.14 ft WT: 15.4 lb OD: 2.24 in

Compact Induction
MAI-B.J 391 LG: 10.81 ft WT: 48.5 lb OD: 2.24 in

Total Length: 144.53 ft Weight: 919.3 lb



20.89 ft IECX - MIE Caliper X
20.89 ft IECY - MIE Caliper Y
20.37 ft IMGR - MMI Image
20.37 ft ITLT - Borehole Tilt

2.58 ft VECO - Shallow Induction
2.58 ft CILD - Deep Conductivity
2.58 ft RILM - Medium Induction
2.58 ft RILD - Deep Induction
Tool Zero (0.13ft from bottom)
All measurements relative to tool zero.

COMPANY VESS OIL CORP.
WELL MCCORD 'A' 20H
FIELD BEMIS SHUTTS
PROVINCE/COUNTY ELLIS
COUNTRY/STATE KANSAS

Elevation Kelly Bushing	2100.60	feet	First Reading	3737.00	feet
Elevation Drill Floor	2099.00	feet	Depth Driller	3740.00	feet
Elevation Ground Level	2091.00	feet	Depth Logger	3737.00	feet



CML MESSENGER SHUTTLE/COMPACT
PHOTO DENSITY/COMP DUAL NEUT
COMPOSITE LOG

