



**TRIOBITE  
TESTING, INC.**

# DRILL STEM TEST REPORT

Enterprise Inc.  
2706 Barclay Dr.  
Hays, Ks 67601  
ATTN: Jerry Green

Veterans #1  
8/14S/11W-Russell  
Job Ticket: 41313 DST#: 1  
Test Start: 2010.12.05 @ 03:24:21

**GENERAL INFORMATION:**


Formation: LKC "C" ft (KB)  
 Deviated: No Whipstock  
 Time Tool Opened: 05:46:21  
 Time Test Ended: 10:57:21  
 Interval: 2866.00 ft (KB) To 2893.00 ft (KB) (TVD)  
 Total Depth: 2893.00 ft (KB) (TVD)  
 Hole Diameter: 7.88 inchesHole Condition: Poor

Test Type: Conventional Bottom Hole  
 Tester: Dustin Rash  
 Unit No: 44  
 Reference Elevations: 1741.00 ft (KB)  
 1731.00 ft (CF)  
 10.00 ft  
 KB to GR/CF:

**Serial #: 6672** Inside  
 Press@RunDepth: 30.15 psig @ 2867.00 ft (KB)  
 Start Date: 2010.12.05 End Date:  
 Start Time: 03:24:21 End Time:

Capacity: 8000.00 psig  
 Last Camb.: 2010.12.05  
 Time On Blm: 2010.12.05 @ 05:44:51  
 Time Off Blm: 2010.12.05 @ 08:50:51

**TEST COMMENT:** IF-Weak building blow. Built to 3 inches.  
 IS-No Return.  
 FF-Weak building blow. Built to 2.5 inches.  
 FS-No Return.

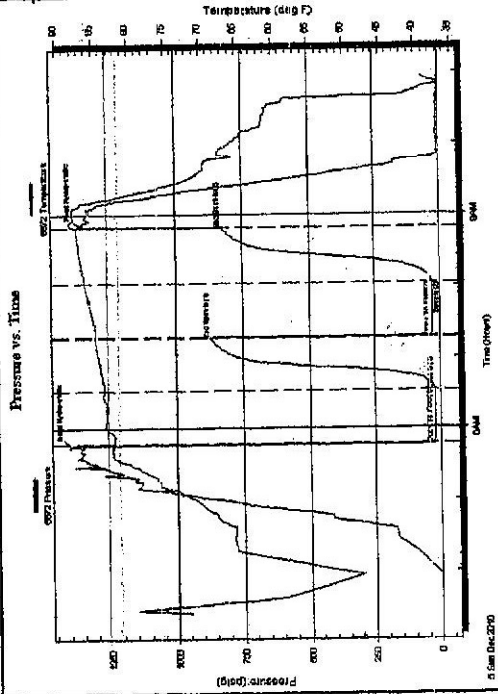

**PRESSURE SUMMARY**

Time (Min.)	Pressure (psig)	Temp (deg F)	Annotation
0	1398.14	82.43	Initial Hydro-static
2	26.12	82.17	Open To Flow (1)
48	23.97	83.70	Shut-In(1)
92	869.38	84.80	End Shut-In(1)
93	35.73	84.81	Open To Flow(2)
138	30.15	86.21	Shut-In(2)
184	824.88	87.30	End Shut-In(2)
186	1359.67	88.11	Final Hydro-static

**Recovery**

Length (ft)	Description	Volume (bbl)
10.00	100%Mud	0.14
30.00	80%Water/20%Mud	0.42

**Gas Rates**

Circle (inches)	Pressure (psig)	Gas Rate (M/Midd)