

**TRILOBITE  
TESTING, INC.**

# DRILL STEM TEST REPORT

Gore Oil Company  
202 S. St. Francis  
Wichita, KS. 67202  
ATTN: Don Rider


**Ross C #5**  
**7-10s-17w-Rooks**  
Job Ticket: 38736      **DST#: 1**  
Test Start: 2010.07.12 @ 19:32:15

## GENERAL INFORMATION:

Formation: **KC**  
Deviated: No Whipstock:                      ft (KB)  
Time Tool Opened: 23:07:45  
Time Test Ended: 03:43:45  
Interval: **3444.00 ft (KB) To 3560.00 ft (KB) (TVD)**  
Total Depth: 3560.00 ft (KB) (TVD)  
Hole Diameter: 7.80 inches Hole Condition: Good  
Test Type: Conventional Bottom Hole  
Tester: Jason McLemore  
Unit No: 32  
Reference Elevations: 2135.00 ft (KB)  
2127.00 ft (CF)  
KB to GR/CF: 8.00 ft

**Serial #: 6755      Inside**  
Press@RunDepth: 85.96 psig @ 3542.00 ft (KB)      Capacity: 8000.00 psig  
Start Date: 2010.07.12      End Date: 2010.07.13      Last Calib.: 2010.07.12  
Start Time: 19:32:15      End Time: 03:43:45      Time On Btm: 2010.07.12 @ 23:07:30  
Time Off Btm: 2010.07.13 @ 02:14:00

TEST COMMENT: FFP-Weak Blow ,Built to 2-1/2"  
ISI-Dead  
FFP-Weak Blow ,Built to 2"  
FSI-Dead

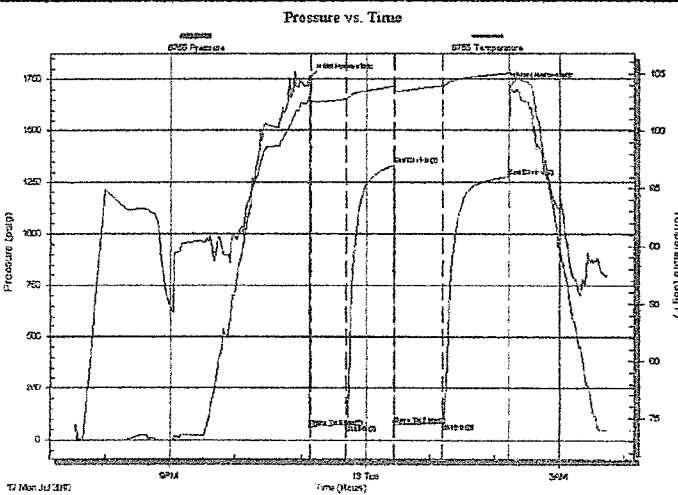

## PRESSURE SUMMARY

Time (Min.)	Pressure (psig)	Temp (deg F)	Annotation
0	1756.84	103.01	Initial Hydro-static
1	61.88	102.04	Open To Flow (1)
34	76.08	102.84	Shut-In(1)
79	1334.81	103.94	End Shut-In(1)
79	75.99	103.42	Open To Flow (2)
124	85.96	103.98	Shut-In(2)
186	1279.83	105.06	End Shut-In(2)
187	1715.52	104.99	Final Hydro-static

## Recovery

Length (ft)	Description	Volume (bbl)
50.00	Drilling Mud	0.70

## Gas Rates

Choke (inches)	Pressure (psig)	Gas Rate (Mcf/d)