



**TRILOBITE
TESTING, INC.**

DRILL STEM TEST REPORT

Vincent Oil Corporation

8-28S-21W Ford

155 N Market Ste 700
Wichita, KS 67202

McCaustland 1-8

ATTN: Jim Hall

Job Ticket: 57925

DST#: 2

Test Start: 2016.01.05 @ 16:09:29

GENERAL INFORMATION:

Formation: **Mississippi**

Deviated: No Whipstock: ft (KB)

Time Tool Opened: 18:24:44

Time Test Ended: 23:31:14

Test Type: Conventional Bottom Hole (Reset)

Tester: Leal Cason

Unit No: 74

Interval: 5024.00 ft (KB) To 5069.00 ft (KB) (TVD)

Reference Elevations: 2373.00 ft (KB)

Total Depth: 5069.00 ft (KB) (TVD)

2360.00 ft (CF)

Hole Diameter: 7.88 inches Hole Condition: Good

KB to GR/CF: 13.00 ft

Serial #: 8525

Inside

Press @ Run Depth: 20.21 psig @ 5025.00 ft (KB)

Capacity: 8000.00 psig

Start Date: 2016.01.05

End Date:

2016.01.05

Last Calib.:

2016.01.05

Start Time: 16:09:30

End Time:

23:31:14

Time On Btm:

2016.01.05 @ 18:18:44

Time Off Btm:

2016.01.05 @ 21:28:29


TEST COMMENT: IF: Weak Blow, Built to 3/4 inch

IS: No Blow Back

FF: Weak Surface Blow

FS: No Blow Back

PRESSURE SUMMARY

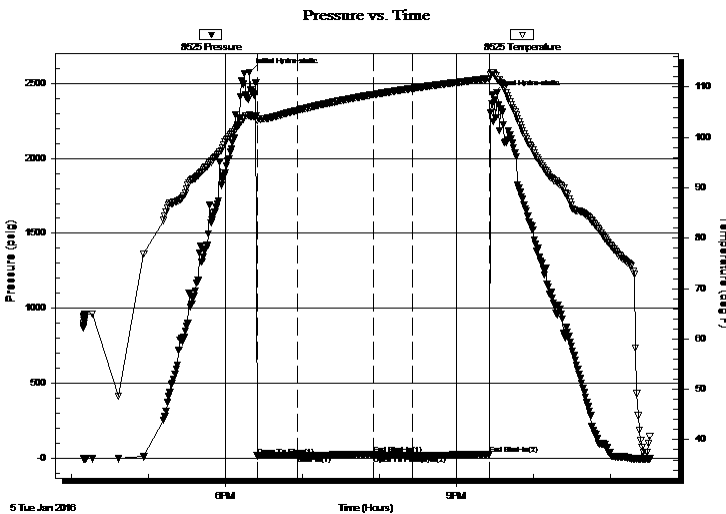

Time (Min.)	Pressure (psig)	Temp (deg F)	Annotation
0	2571.99	104.42	Initial Hydro-static
6	18.62	103.34	Open To Flow (1)
38	20.14	105.39	Shut-In(1)
97	28.55	108.52	End Shut-In(1)
97	19.23	108.52	Open To Flow (2)
127	20.21	109.73	Shut-In(2)
187	26.98	111.69	End Shut-In(2)
190	2424.04	112.92	Final Hydro-static

Recovery

Length (ft)	Description	Volume (bbl)
2.00	Mud	0.01

* Recovery from multiple tests

Gas Rates

Choke (inches)	Pressure (psig)	Gas Rate (Mcf/d)



TRILOBITE TESTING, INC.

DRILL STEM TEST REPORT

Vincent Oil Corporation

155 N Market Ste 700
Wichita, KS 67202

ATTN: Jim Hall

8-28S-21W Ford

McCaustland 1-8

Job Ticket: 57925

DST#: 2

Test Start: 2016.01.05 @ 16:09:29

GENERAL INFORMATION:

Formation: **Mississippi**

Deviated: No Whipstock: ft (KB)

Time Tool Opened: 18:24:44

Time Test Ended: 23:31:14

Test Type: Conventional Bottom Hole (Reset)

Tester: Leal Cason

Unit No: 74

Interval: 5024.00 ft (KB) To 5069.00 ft (KB) (TVD)

Reference Elevations: 2373.00 ft (KB)

Total Depth: 5069.00 ft (KB) (TVD)

2360.00 ft (CF)

Hole Diameter: 7.88 inches Hole Condition: Good

KB to GR/CF: 13.00 ft

Serial #: 6806 Outside

Press @ Run Depth: psig @ 5025.00 ft (KB)

Capacity: 8000.00 psig

Start Date: 2016.01.05

End Date:

2016.01.05

Last Calib.:

2016.01.05

Start Time: 16:09:30

End Time:


23:30:59

Time On Btm:

Time Off Btm:

TEST COMMENT: IF: Weak Blow, Built to 3/4 inch
IS: No Blow Back
FF: Weak Surface Blow
FS: No Blow Back

Pressure vs. Time

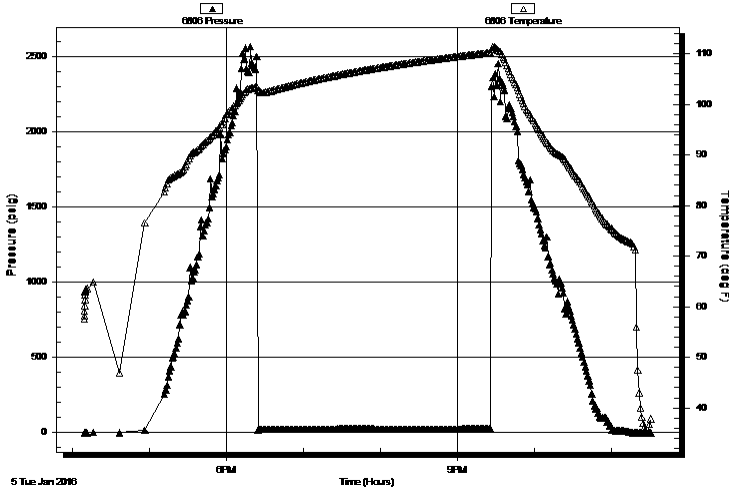

PRESSURE SUMMARY

Time (Min.)	Pressure (psig)	Temp (deg F)	Annotation

Recovery

Length (ft)	Description	Volume (bbl)
2.00	Mud	0.01

Gas Rates

Choke (inches)	Pressure (psig)	Gas Rate (Mcf/d)

* Recovery from multiple tests


Serial #: 8525

Inside

Vincent Oil Corporation

McCausland 1-8

DST Test Number: 2

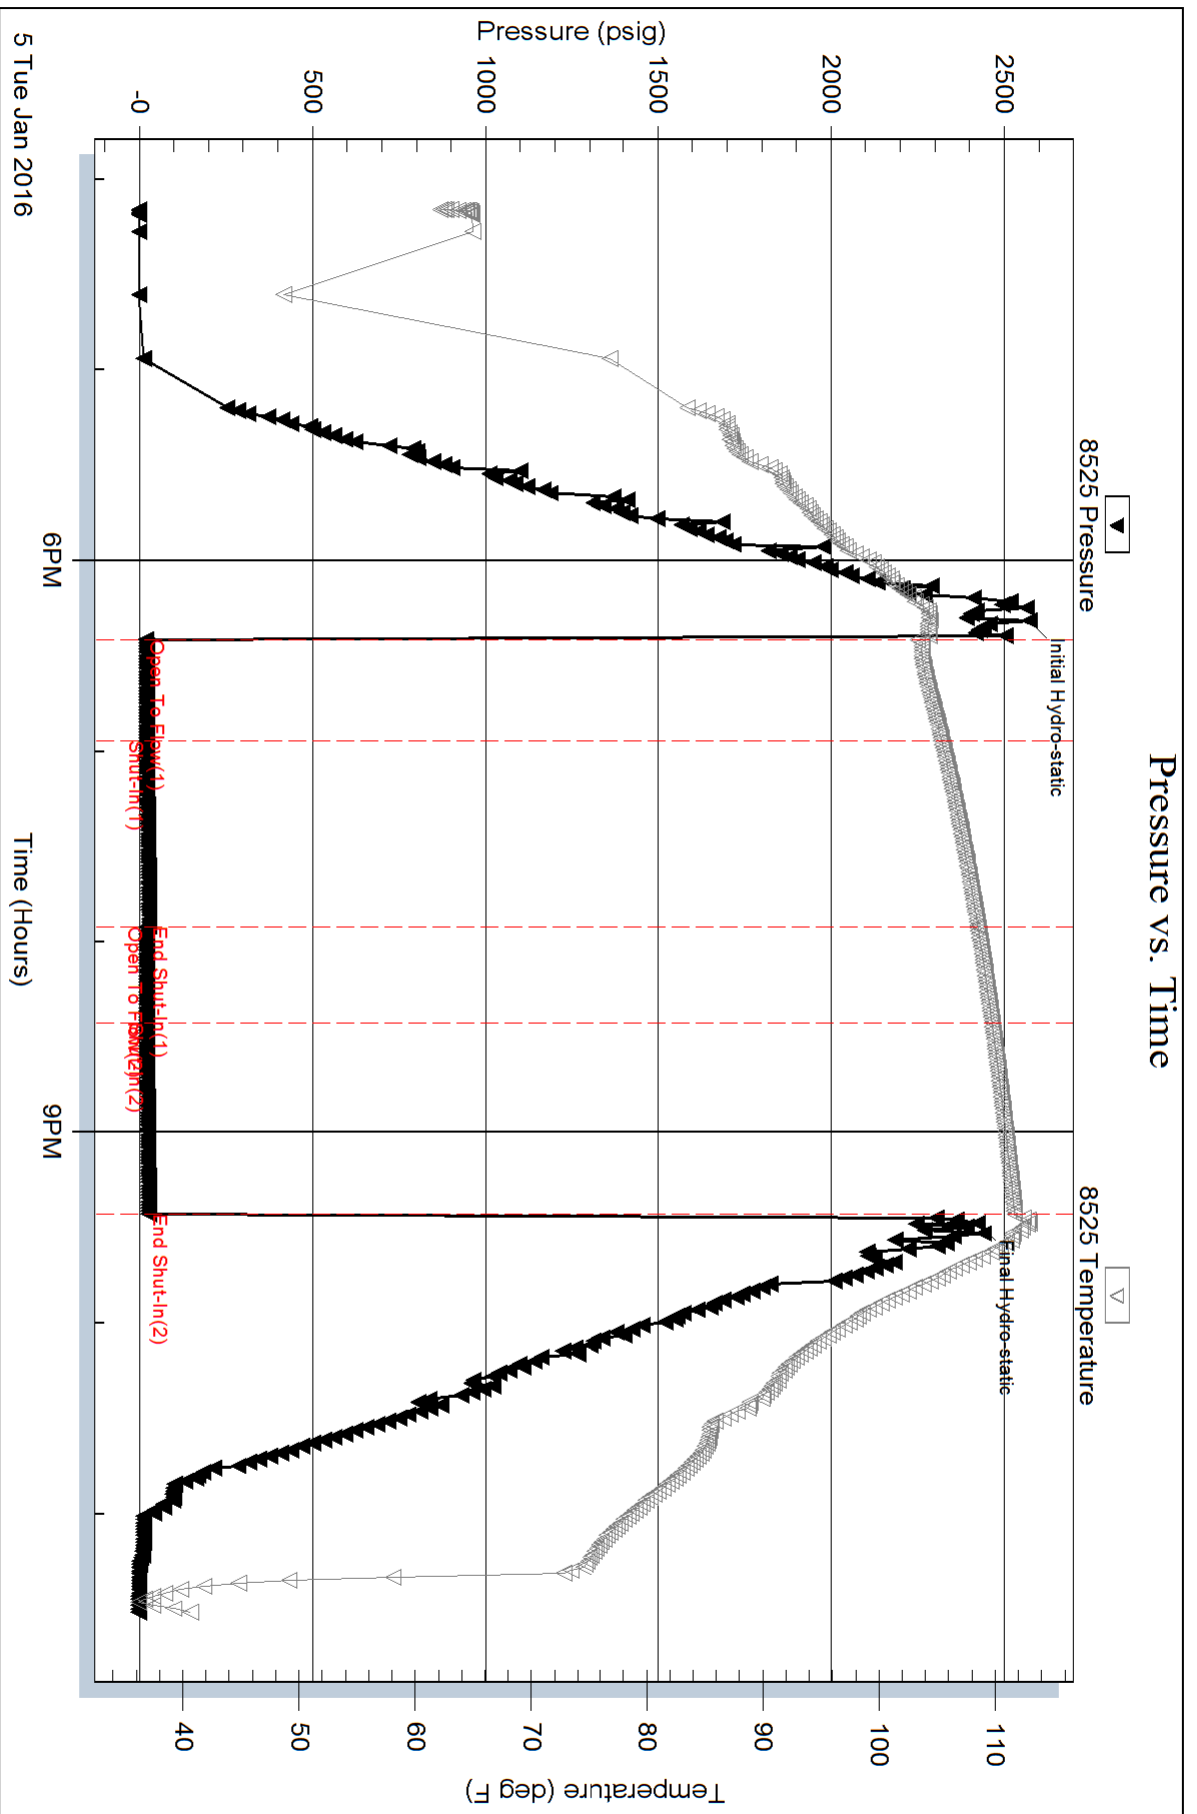

Serial #: 6806

Outside Vincent Oil Corporation

McCausland 1-8

DST Test Number: 2

