



TRILOBITE TESTING, INC.

DRILL STEM TEST REPORT

Berexco LLC
 2020 N Bramblewood Wichita KS 67206+1094
 ATTN: Bryan Bynog

17-2s-37w
Theron #2-17
 Job Ticket: 65786 **DST#: 6**
 Test Start: 2019.05.10 @ 17:06:00


GENERAL INFORMATION:

Formation: **LKC "E"**
 Deviated: No Whipstock: ft (KB)
 Time Tool Opened: 18:55:20
 Time Test Ended: 00:00:20
 Interval: **4500.00 ft (KB) To 4560.00 ft (KB) (TVD)**
 Total Depth: 4560.00 ft (KB) (TVD)
 Hole Diameter: 7.88 inches Hole Condition: Fair
 Test Type: Conventional Bottom Hole (Initial)
 Tester: Benny Mulligan
 Unit No: 66
 Reference Elevations: 3403.00 ft (KB)
 3395.00 ft (CF)
 KB to GR/CF: 8.00 ft

Serial #: 6772

Press@RunDepth: 17.60 psig @ ft (KB) Capacity: 8000.00 psig
 Start Date: 2019.05.10 End Date: 2019.05.11 Last Calib.: 2019.05.11
 Start Time: 17:06:01 End Time: 00:00:20 Time On Btm: 2019.05.10 @ 18:54:00
 Time Off Btm: 2019.05.10 @ 22:00:39

TEST COMMENT: IF-30- built to 1/2"
 IS-60- no blow back
 FF-30- no blow
 FS-60- no blow back

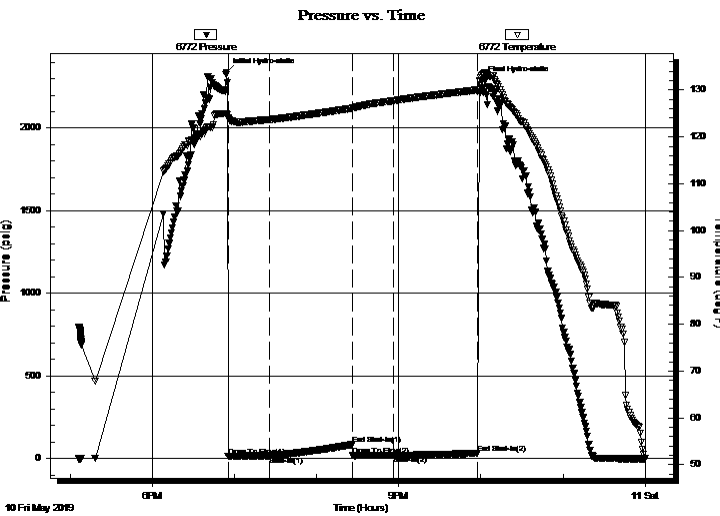

PRESSURE SUMMARY


Time (Min.)	Pressure (psig)	Temp (deg F)	Annotation
0	2337.50	124.98	Initial Hydro-static
2	14.46	123.99	Open To Flow (1)
32	16.03	123.69	Shut-In(1)
93	84.26	126.12	End Shut-In(1)
93	17.16	126.11	Open To Flow (2)
122	17.60	127.69	Shut-In(2)
184	30.03	130.01	End Shut-In(2)
187	2285.69	133.12	Final Hydro-static

Recovery

Length (ft)	Description	Volume (bbl)
3.00	O.S.M. 100%M	0.01

Gas Rates

Choke (inches)	Pressure (psig)	Gas Rate (Mcf/d)



TRILOBITE TESTING, INC.

DRILL STEM TEST REPORT

Berexco LLC
 2020 N Bramblewood Wichita KS 67206+1094
 ATTN: Bryan Bynog

17-2s-37w
Theron #2-17
 Job Ticket: 65786 **DST#: 6**
 Test Start: 2019.05.10 @ 17:06:00


GENERAL INFORMATION:

Formation: **LKC "E"**
 Deviated: No Whipstock: ft (KB)
 Test Type: Conventional Bottom Hole (Initial)
 Time Tool Opened: 18:55:20 Tester: Benny Mulligan
 Time Test Ended: 00:00:20 Unit No: 66
 Interval: **4500.00 ft (KB) To 4560.00 ft (KB) (TVD)** Reference Elevations: 3403.00 ft (KB)
 Total Depth: 4560.00 ft (KB) (TVD) 3395.00 ft (CF)
 Hole Diameter: 7.88 inches Hole Condition: Fair KB to GR/CF: 8.00 ft

Serial #: 6769

Press@RunDepth: psig @ ft (KB) Capacity: 8000.00 psig
 Start Date: 2019.05.10 End Date: 2019.05.11 Last Calib.: 2019.05.11
 Start Time: 17:06:01 End Time: 00:00:20 Time On Btm:
 Time Off Btm:

TEST COMMENT: IF-30- built to 1/2"
 IS-60- no blow back
 FF-30- no blow
 FS-60- no blow back

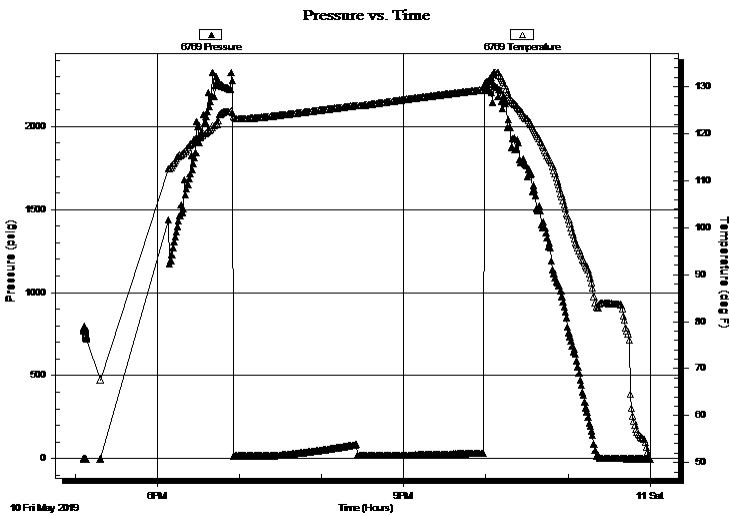

PRESSURE SUMMARY

Time (Min.)	Pressure (psig)	Temp (deg F)	Annotation

Recovery

Length (ft)	Description	Volume (bbl)
3.00	O.S.M. 100%M	0.01

Gas Rates

Choke (inches)	Pressure (psig)	Gas Rate (Mcf/d)



**TRILOBITE
TESTING, INC.**

DRILL STEM TEST REPORT

FLUID SUMMARY

Berexco LLC

17-2s-37w

2020 N Bramblewood Wichita KS 67206+1094

Theron #2-17

Job Ticket: 65786

DST#: 6

ATTN: Bryan Bynog

Test Start: 2019.05.10 @ 17:06:00

Mud and Cushion Information

Mud Type: Gel Chem

Cushion Type:

Oil API:

deg API

Mud Weight: 9.00 lb/gal

Cushion Length:

ft

Water Salinity:

ppm

Viscosity: 66.00 sec/qt

Cushion Volume:

bbbl

Water Loss: 6.00 in³

Gas Cushion Type:

Resistivity: ohm.m

Gas Cushion Pressure:

psig

Salinity: 600.00 ppm

Filter Cake: 2.00 inches

Recovery Information

Recovery Table

Length ft	Description	Volume bbl
3.00	O.S.M. 100%M	0.015

Total Length: 3.00 ft Total Volume: 0.015 bbl

Num Fluid Samples: 0

Num Gas Bombs: 0

Serial #:

Laboratory Name:

Laboratory Location:

Recovery Comments:

