



**TRILOBITE TESTING, INC.**

# DRILL STEM TEST REPORT

Berexco LLC.  
 2020 N. Bramblewood  
 Wichita Ks, 67206  
 ATTN: Pete Vollmer


**19-1S-37W**  
**Owens - Trust #2-19**  
 Job Ticket: 61089 **DST#: 2**  
 Test Start: 2015.02.04 @ 09:59:00

## GENERAL INFORMATION:

Formation: **KCL - 'B'**  
 Deviated: No Whipstock: ft (KB)  
 Test Type: Conventional Bottom Hole (Initial)  
 Time Tool Opened: 12:20:45 Tester: Royal Fisher  
 Time Test Ended: 18:31:45 Unit No: #54  
 Interval: **4214.00 ft (KB) To 4276.00 ft (KB) (TVD)** Reference Elevations: 3236.00 ft (KB)  
 Total Depth: 4276.00 ft (KB) (TVD) 3223.00 ft (CF)  
 Hole Diameter: 7.88 inches Hole Condition: Good KB to GR/CF: 13.00 ft

**Serial #: 6753 Outside**  
 Press @ Run Depth: 46.17 psig @ 4215.00 ft (KB) Capacity: 8000.00 psig  
 Start Date: 2015.02.04 End Date: 2015.02.04 Last Calib.: 2015.02.04  
 Start Time: 09:59:05 End Time: 18:31:45 Time On Btm: 2015.02.04 @ 12:20:30  
 Time Off Btm: 2015.02.04 @ 15:53:30

**TEST COMMENT:** 30 - IF - Surface blow built up to 1 1/2"  
 60 - ISI - No Return  
 60 - FF - No Surface blow  
 60 - FSI - No Return

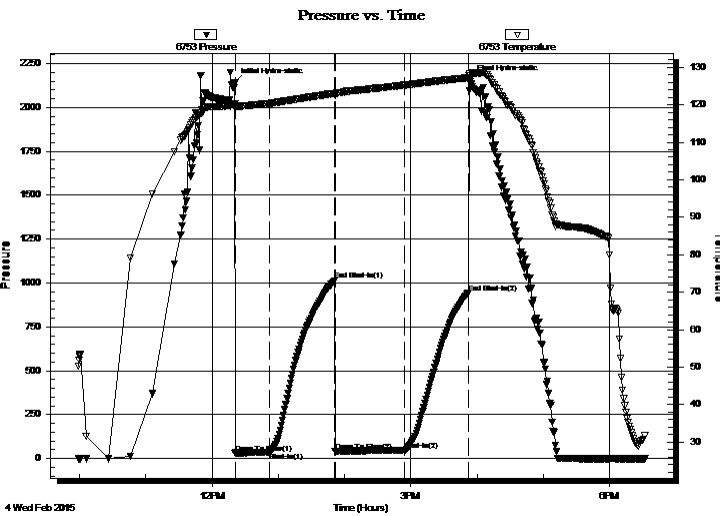

## PRESSURE SUMMARY

Time (Min.)	Pressure (psig)	Temp (deg F)	Annotation
0	2143.63	120.22	Initial Hydro-static
1	30.89	119.04	Open To Flow (1)
32	36.33	120.37	Shut-In(1)
91	1015.05	123.00	End Shut-In(1)
91	39.71	122.37	Open To Flow (2)
154	46.17	125.21	Shut-In(2)
212	945.29	127.19	End Shut-In(2)
213	2157.20	128.26	Final Hydro-static

## Recovery

Length (ft)	Description	Volume (bbl)
20.00	OSM - 100M - Oil Spots	0.10

## Gas Rates

	Choke (inches)	Pressure (psig)	Gas Rate (Mcf/d)



**TRILOBITE TESTING, INC.**

# DRILL STEM TEST REPORT

Berexco LLC.  
 2020 N. Bramblewood  
 Wichita Ks, 67206  
 ATTN: Pete Vollmer


**19-1S-37W**  
**Owens - Trust #2-19**  
 Job Ticket: 61089 **DST#: 2**  
 Test Start: 2015.02.04 @ 09:59:00

## GENERAL INFORMATION:

Formation: **KCL - 'B'**  
 Deviated: No Whipstock: ft (KB)  
 Time Tool Opened: 12:20:45  
 Time Test Ended: 18:31:45  
 Interval: **4214.00 ft (KB) To 4276.00 ft (KB) (TVD)**  
 Total Depth: 4276.00 ft (KB) (TVD)  
 Hole Diameter: 7.88 inches Hole Condition: Good  
 Test Type: Conventional Bottom Hole (Initial)  
 Tester: Royal Fisher  
 Unit No: #54  
 Reference Elevations: 3236.00 ft (KB)  
 3223.00 ft (CF)  
 KB to GR/CF: 13.00 ft

**Serial #: 8368** **Inside**  
 Press @ Run Depth: psig @ 4215.00 ft (KB) Capacity: 8000.00 psig  
 Start Date: 2015.02.04 End Date: 2015.02.04 Last Calib.: 2015.02.04  
 Start Time: 09:59:05 End Time: 18:31:30 Time On Btm:  
 Time Off Btm:

**TEST COMMENT:** 30 - IF - Surface blow built up to 1 1/2"  
 60 - ISI - No Return  
 60 - FF - No Surface blow  
 60 - FSI - No Return

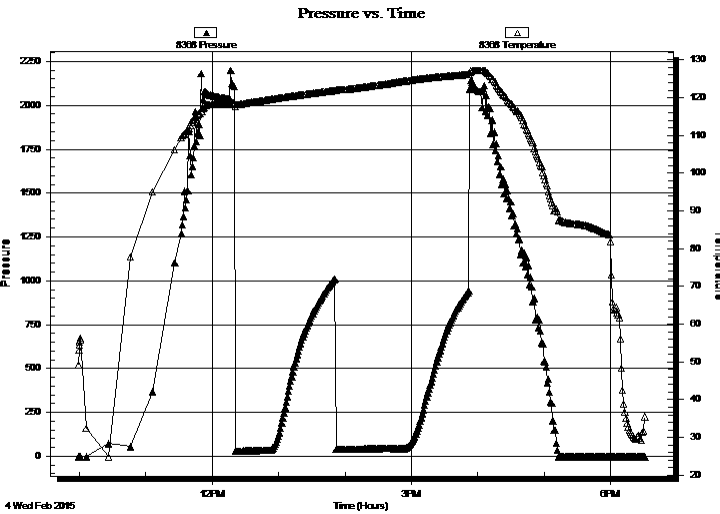

## PRESSURE SUMMARY


Time (Min.)	Pressure (psig)	Temp (deg F)	Annotation

## Recovery

Length (ft)	Description	Volume (bbl)
20.00	OSM - 100M - Oil Spots	0.10

## Gas Rates

Choke (inches)	Pressure (psig)	Gas Rate (Mcf/d)

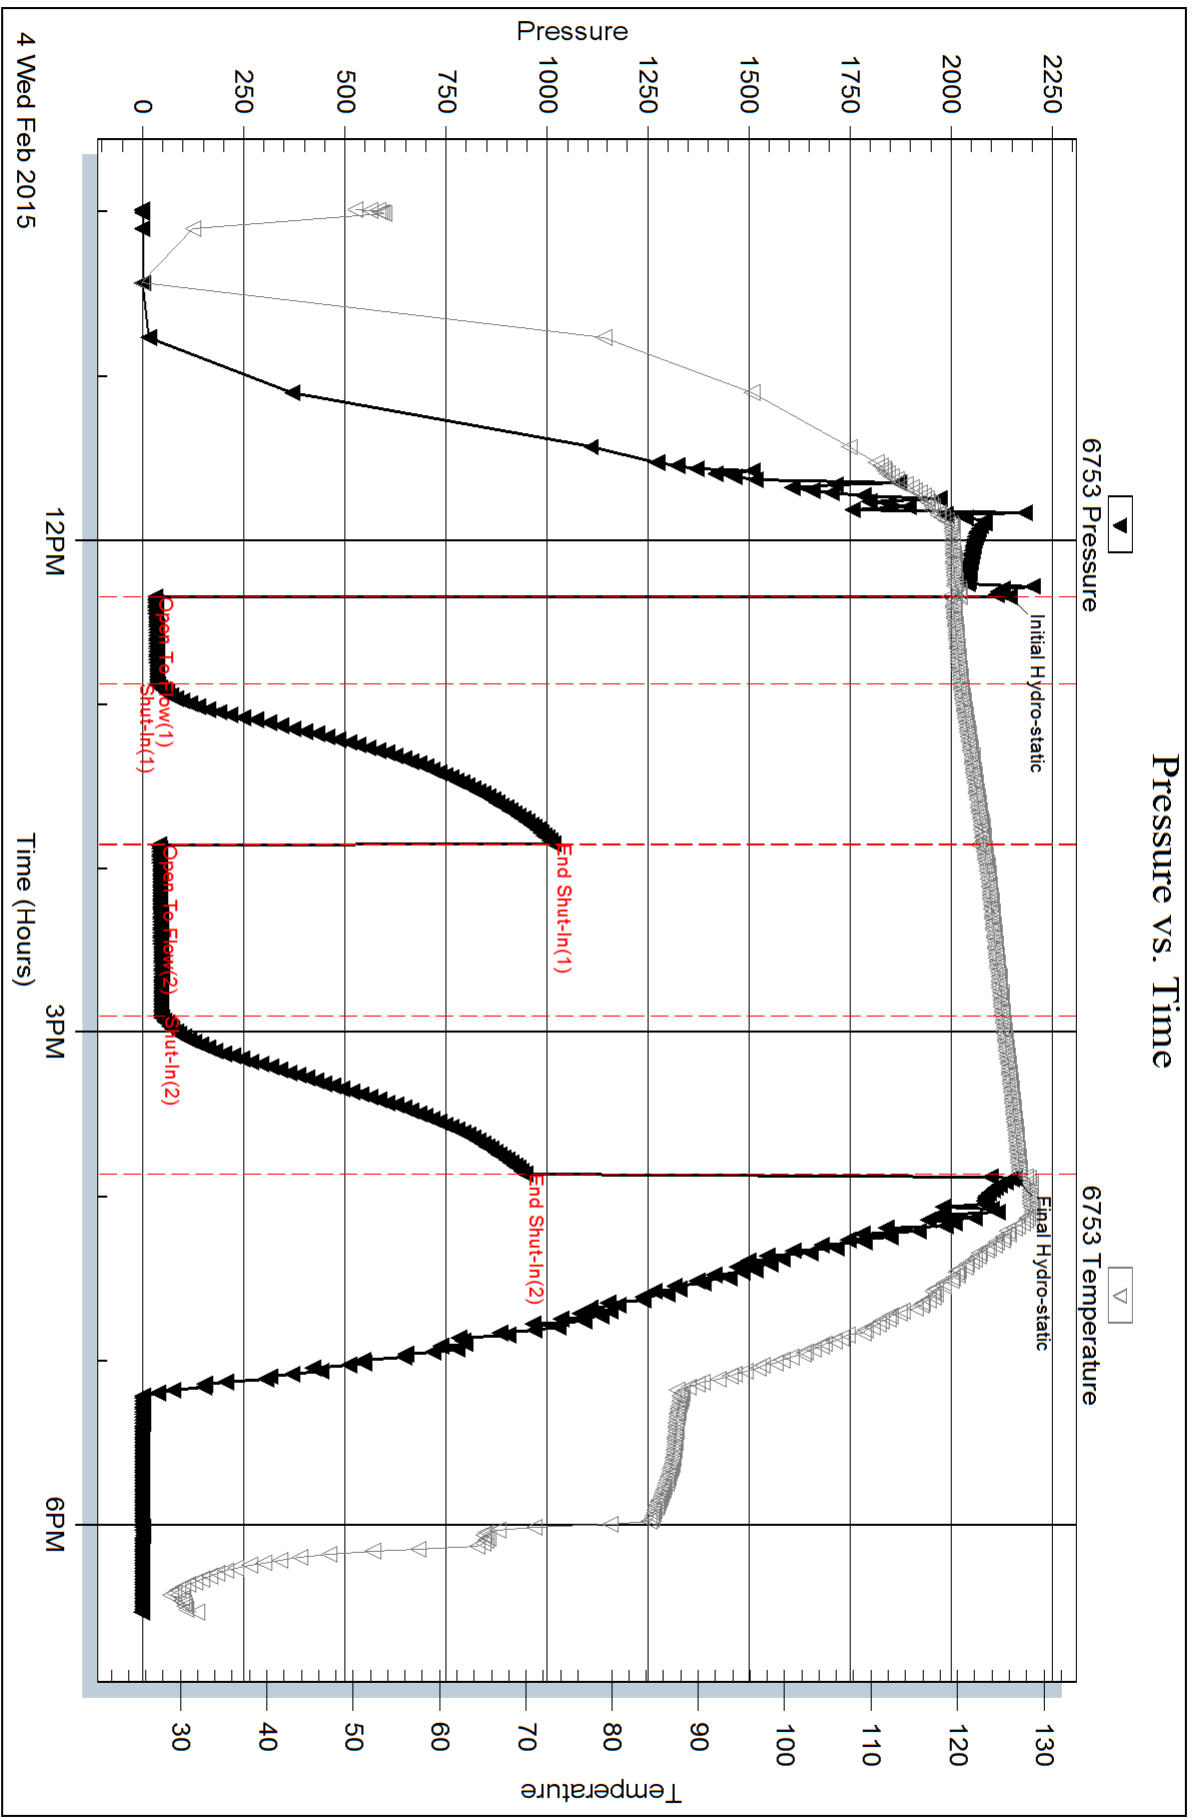


Serial #: 8368

Inside

Berexco LLC.

Owens - Trust#2-19

DST Test Number: 2

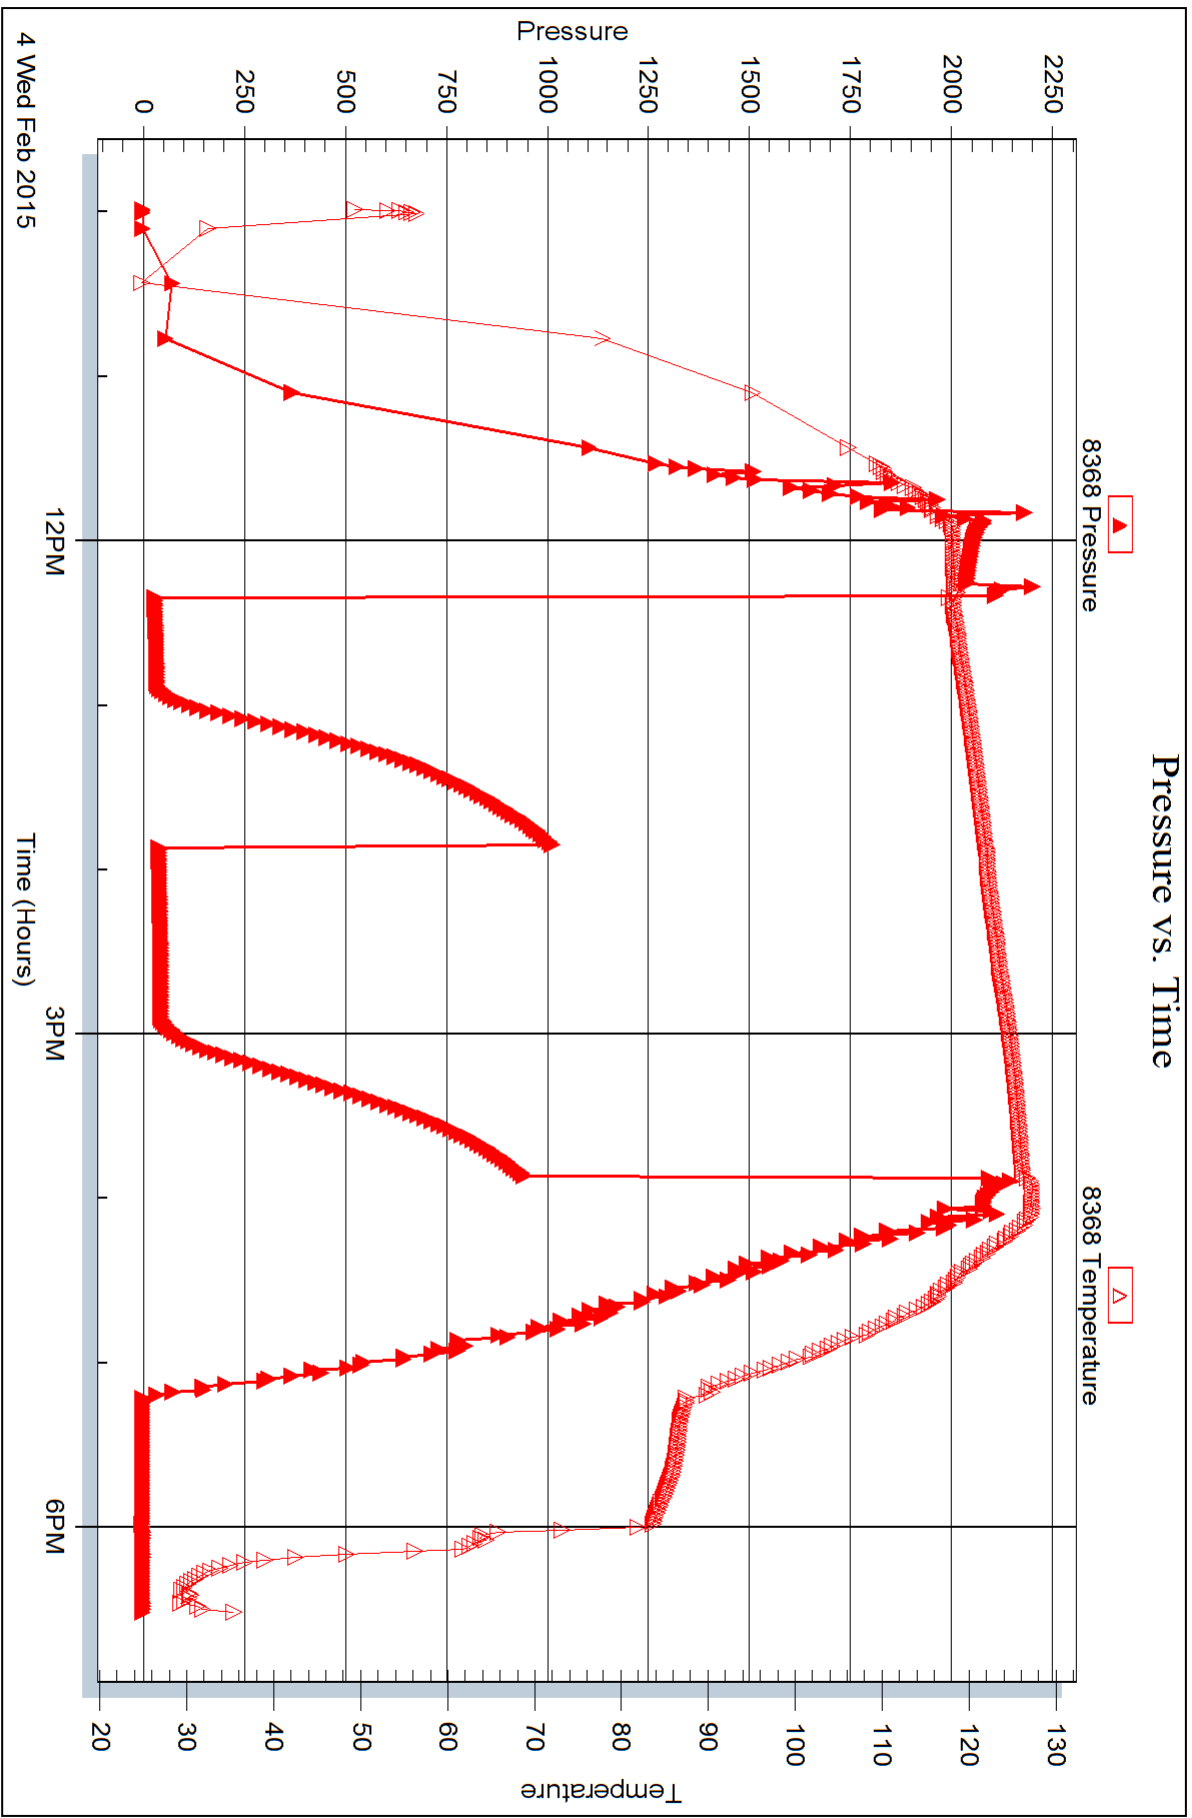

Triobite Testing, Inc

Ref. No: 61089

Printed: 2015.02.04 @ 20:00:12