



**TRILOBITE
TESTING, INC.**

DRILL STEM TEST REPORT

Vincent Oil Corporation
200 W Douglas Ave #725
Wichita, KS 67202
ATTN: Tom Dudgeon


34-28S-23W Ford
Keough 7-34
Job Ticket: 57828 **DST#: 1**
Test Start: 2017.09.19 @ 00:37:49

GENERAL INFORMATION:

Formation: **Pawnee**
Deviated: No Whipstock: ft (KB)
Time Tool Opened: 03:38:49
Time Test Ended: 09:56:49
Test Type: Conventional Bottom Hole (Initial)
Tester: Leal Cason
Unit No: 74
Interval: **5045.00 ft (KB) To 5072.00 ft (KB) (TVD)**
Reference Elevations: 2547.00 ft (KB)
Total Depth: 5072.00 ft (KB) (TVD) 2535.00 ft (CF)
Hole Diameter: 7.88 inches Hole Condition: Good KB to GR/CF: 12.00 ft

Serial #: 8159 Inside
Press@RunDepth: 130.52 psig @ 5046.00 ft (KB) Capacity: 8000.00 psig
Start Date: 2017.09.19 End Date: 2017.09.19 Last Calib.: 2017.09.19
Start Time: 00:37:50 End Time: 09:56:49 Time On Btm: 2017.09.19 @ 03:37:04
Time Off Btm: 2017.09.19 @ 07:31:49

TEST COMMENT: IF: Strong Blow , BOB in 2 minutes
IS: No Blow Back
FF: Strong Blow , BOB in 3 minutes
FS: Weak Surface Blow Back

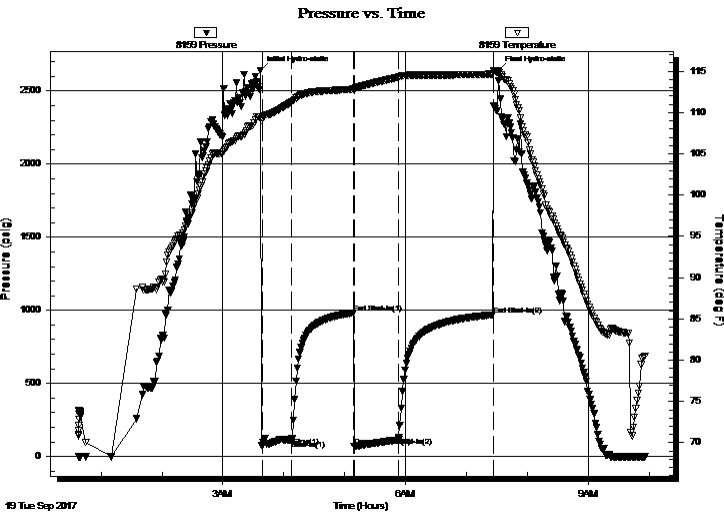

PRESSURE SUMMARY

Time (Min.)	Pressure (psig)	Temp (deg F)	Annotation
0	2641.06	109.54	Initial Hydro-static
2	70.42	109.25	Open To Flow (1)
31	113.21	111.28	Shut-In(1)
92	981.83	112.82	End Shut-In(1)
93	69.42	112.72	Open To Flow (2)
137	130.52	114.30	Shut-In(2)
230	969.58	114.65	End Shut-In(2)
235	2640.68	114.98	Final Hydro-static

Recovery

Length (ft)	Description	Volume (bbl)
0.00	640 GIP	0.00
62.00	MCW 5%M 95%W	0.87
226.00	GOWCM 30%G 10%O 20%W 40%M	3.17

Gas Rates

	Choke (inches)	Pressure (psig)	Gas Rate (Mcf/d)



**TRILOBITE
TESTING, INC.**

DRILL STEM TEST REPORT

Vincent Oil Corporation
200 W Douglas Ave #725
Wichita, KS 67202
ATTN: Tom Dudgeon


34-28S-23W Ford
Keough 7-34
Job Ticket: 57828 **DST#: 1**
Test Start: 2017.09.19 @ 00:37:49

GENERAL INFORMATION:

Formation: **Pawnee**
Deviated: No Whipstock: ft (KB)
Time Tool Opened: 03:38:49
Time Test Ended: 09:56:49
Interval: **5045.00 ft (KB) To 5072.00 ft (KB) (TVD)**
Total Depth: 5072.00 ft (KB) (TVD)
Hole Diameter: 7.88 inches Hole Condition: Good
Test Type: Conventional Bottom Hole (Initial)
Tester: Leal Cason
Unit No: 74
Reference Elevations: 2547.00 ft (KB)
2535.00 ft (CF)
KB to GR/CF: 12.00 ft

Serial #: 6806 **Outside**
Press@RunDepth: psig @ 5046.00 ft (KB) Capacity: 8000.00 psig
Start Date: 2017.09.19 End Date: 2017.09.19 Last Calib.: 2017.09.19
Start Time: 00:37:50 End Time: 09:57:04 Time On Btm:
Time Off Btm:

TEST COMMENT: IF: Strong Blow , BOB in 2 minutes
IS: No Blow Back
FF: Strong Blow , BOB in 3 minutes
FS: Weak Surface Blow Back

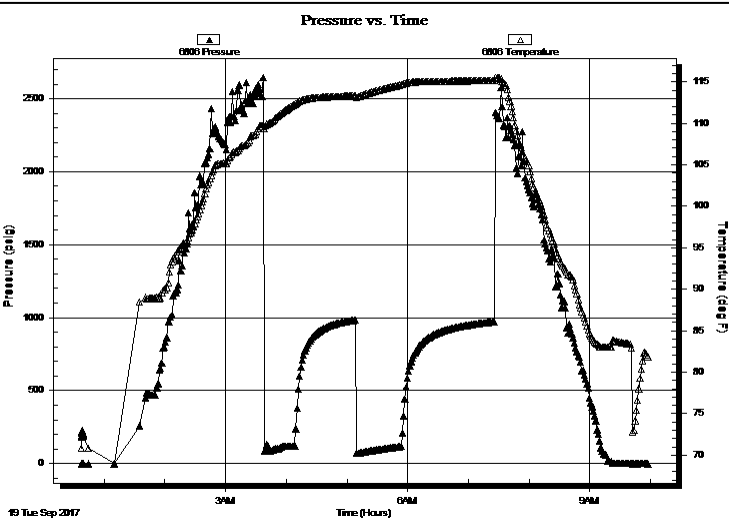

PRESSURE SUMMARY

Time (Min.)	Pressure (psig)	Temp (deg F)	Annotation

Recovery

Length (ft)	Description	Volume (bbl)
0.00	640 GIP	0.00
62.00	MCW 5%M 95%W	0.87
226.00	GOWCM 30%G 10%O 20%W 40%M	3.17

Gas Rates

Choke (inches)	Pressure (psig)	Gas Rate (Mcf/d)



**TRILOBITE
TESTING, INC.**

DRILL STEM TEST REPORT

FLUID SUMMARY

Vincent Oil Corporation

34-28S-23W Ford

200 W Douglas Ave #725
Wichita, KS 67202

Keough 7-34

Job Ticket: 57828

DST#: 1

ATTN: Tom Dudgeon

Test Start: 2017.09.19 @ 00:37:49

Mud and Cushion Information

Mud Type: Gel Chem

Cushion Type:

Oil API:

deg API

Mud Weight: 10.00 lb/gal

Cushion Length:

ft

Water Salinity:

58000 ppm

Viscosity: 56.00 sec/qt

Cushion Volume:

bbbl

Water Loss: 11.59 in³

Gas Cushion Type:

Resistivity: ohm.m

Gas Cushion Pressure:

psig

Salinity: 7700.00 ppm

Filter Cake: 0.02 inches

Recovery Information

Recovery Table

Length ft	Description	Volume bbl
0.00	640 GIP	0.000
62.00	MCW 5%M 95%W	0.870
226.00	GOWCM 30%G 10%O 20%W 40%M	3.170

Total Length: 288.00 ft Total Volume: 4.040 bbl

Num Fluid Samples: 0

Num Gas Bombs: 0

Serial #:

Laboratory Name:

Laboratory Location:

Recovery Comments: RW w as .12 @ 83 degrees


Serial #: 8159

Inside

Vincent Oil Corporation

Keough 7-34

DST Test Number: 1

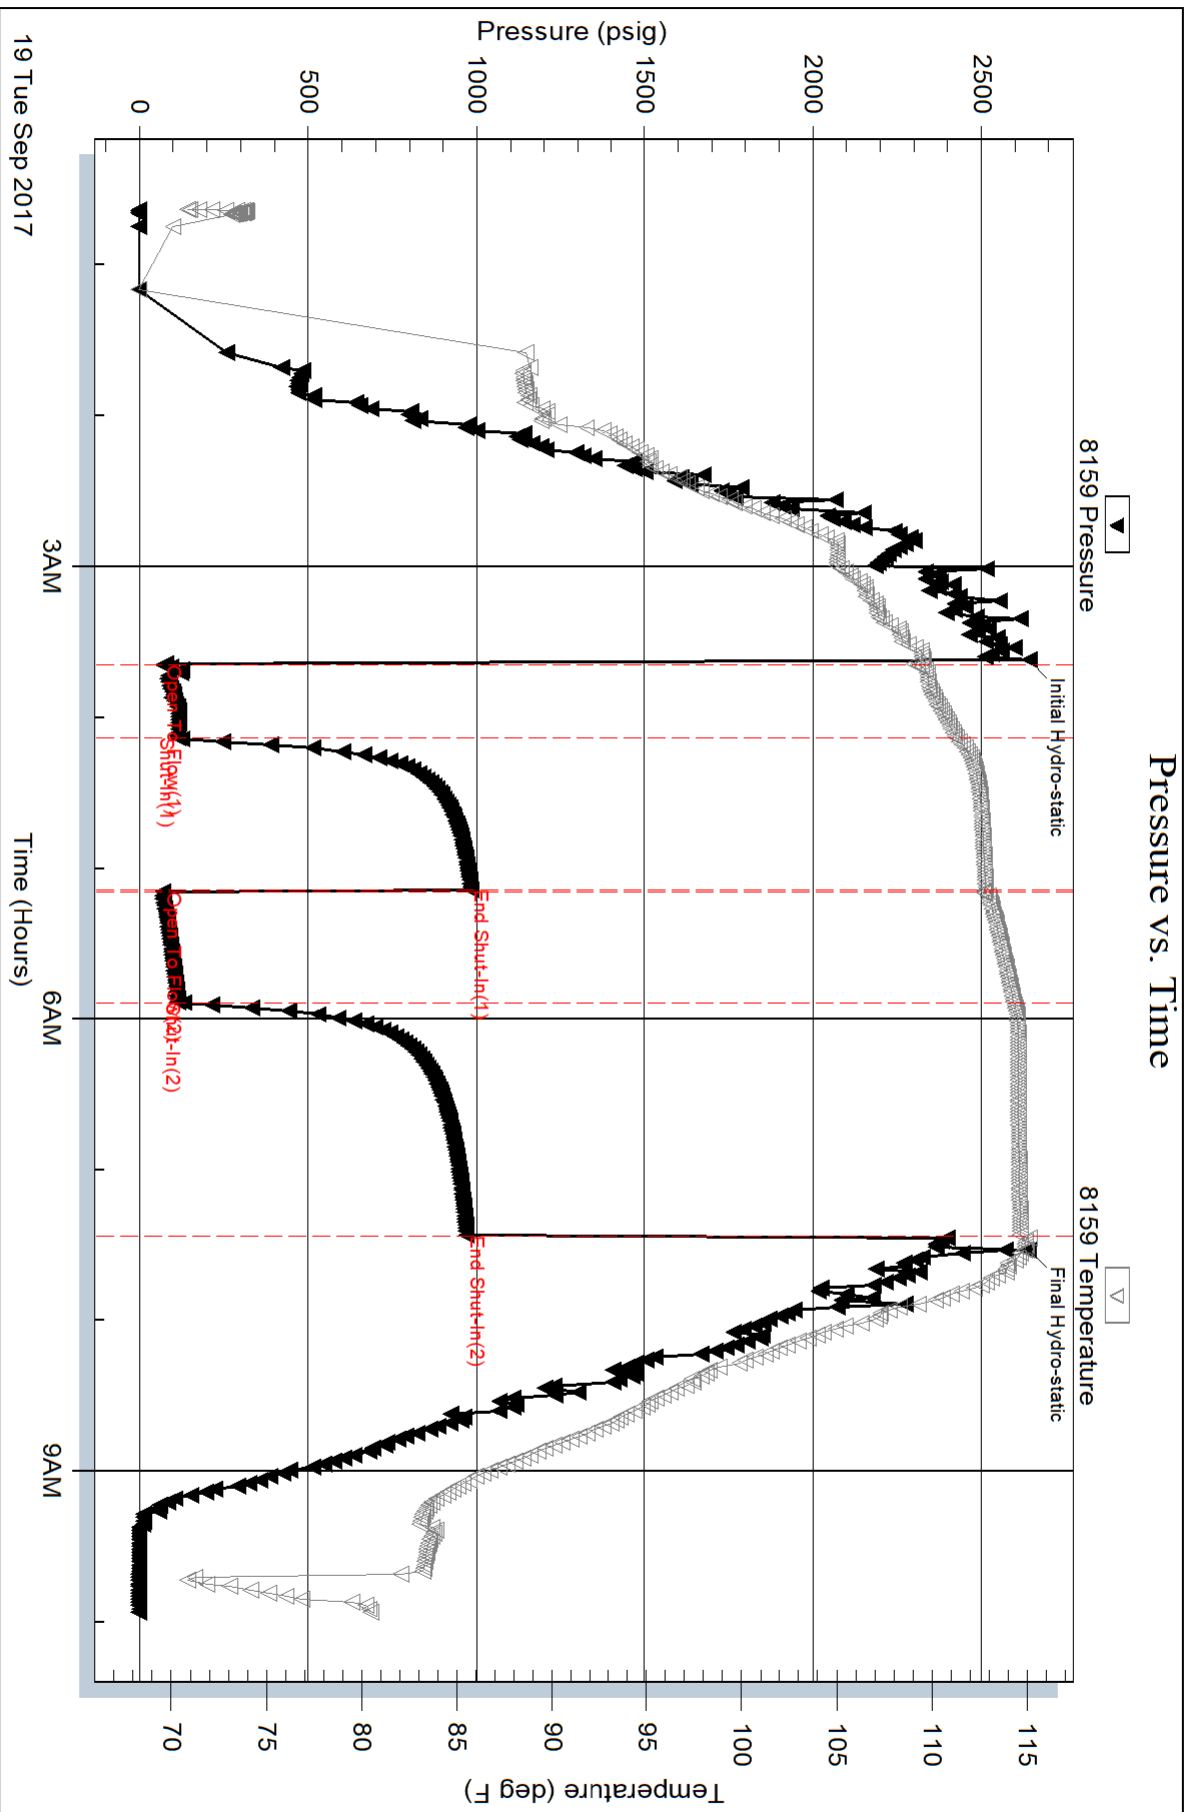

Triobite Testing, Inc

Ref. No: 57828


Printed: 2017.09.19 @ 10:06:54

Serial #: 6806

Outside Vincent Oil Corporation

Keough 7-34

DST Test Number: 1

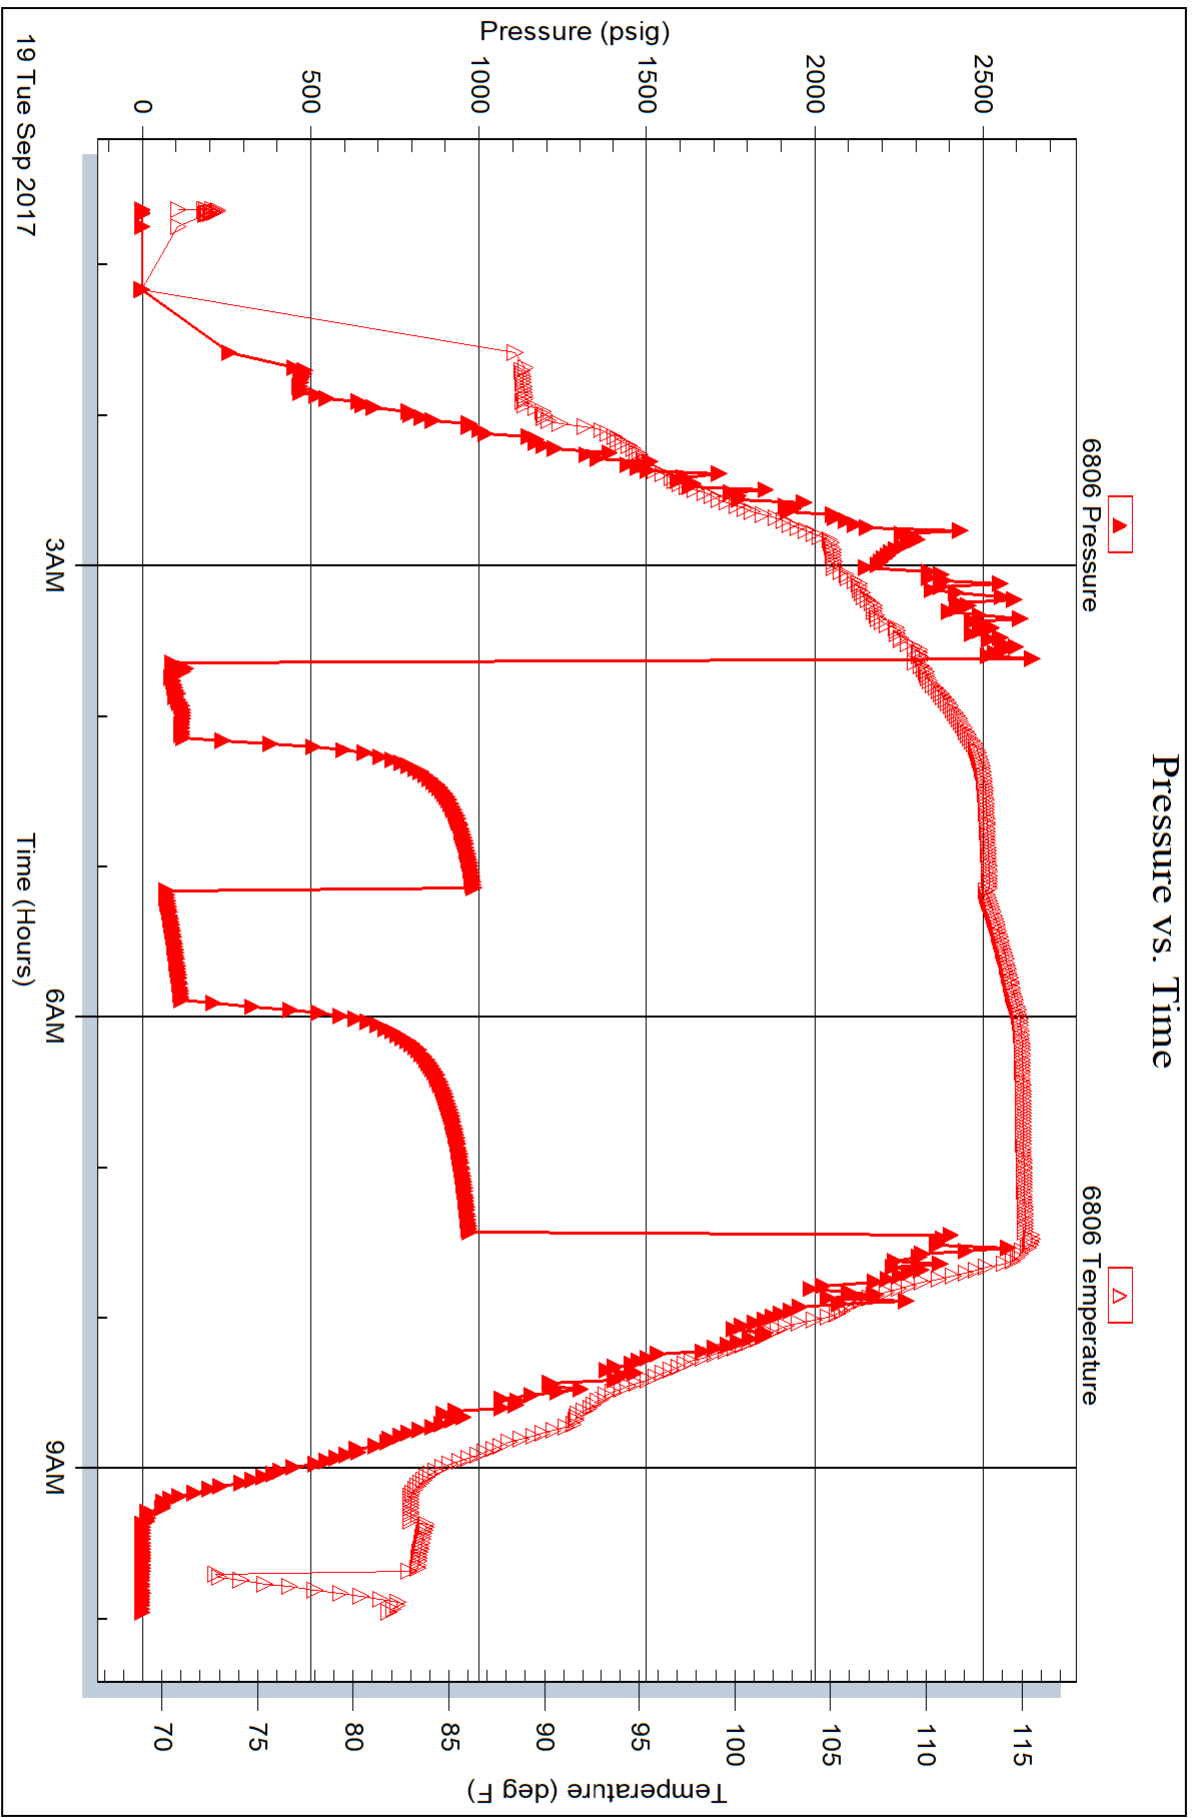

Trilobite Testing, Inc

Ref. No: 57828

Printed: 2017.09.19 @ 10:06:54